



VAN STOCK

Universal Parts and Accessories

UK

GEV Catering Spares Ltd

307-309 Totemic House
Springfield Business Park
Caunt Road, Grantham
NG31 7FZ
www.gev-online.co.uk

Phone: 01476 583922
Fax: 01476 514640
info@gev-online.co.uk



P062325101

Find more parts in the GEV Webshop: www.gev-online.co.uk



gas components

pilot burners

SIT



fig.	GEV No.	producer	type	flames	nozzle ø (mm)	gas connection (mm)	min.order quantity
1	106902	SIT	100 series	2	0.2	6	1
2	106903	SIT	100 series	3	0.2	6	1
3	106906	SIT	100 series	3	0.2	6	1



fig.	GEV No.	producer	type	flames	nozzle ø (mm)	gas connection (mm)	min.order quantity
1	107232	SIT	150 series	2	-	-	1
2	100105	SIT	160 series	3	-	-	1

ROBERTSHAW



fig.	GEV No.	type	gas type	code	for pipe ø	min.order quantity
1	107407	2CH-10	NG	21	3/16" CCT	1
2	107467	6CH14-1	NG	22	1/4" CCT	1

pilot burner accessories



fig.	GEV No.	description	min.order quantity
1	101483	union nut thread 1/4" CCT short	1
2	102509	union screw thread M10x1 for pipe ø 6mm Qty 5 pcs	1
3	101481	olive for pipe ø 1/4" CCT Qty 1 pcs	1
4	102584	olive for pipe ø 4mm Qty 10 pcs	1
5	106109	locking screw thread 7/16"-24 UNS for pipe ø 1/4" L 16mm brass Qty 1 pcs WS 7/16" (11.113mm)	1
6	102505	locking screw M10x1 for pipe ø 6mm Qty 5 pcs	1

pilot tubes



fig.	GEV No.	material	pipe ø	thickness (mm)	L (mm)	min.order quantity
1	102110	copper	4mm	1	3000	1
1	102111	copper	6mm	1	3000	1

ignition electrodes



fig.	GEV No.	description	min.order quantity
1	100701	ignition electrode connection M4 Qty 1 pcs	1
2	100706	ignition electrode connection M4 Qty 1 pcs	1

piezoelectric igniters

ø18mm



fig.	GEV No.	mounting ø (mm)	connection	min.order quantity
1	100009	18	ø2.4mm	1
2	100012	18	ø2.4mm	1
3	107152	18	ø2.4mm	1

ø22mm



fig.	GEV No.	mounting ø (mm)	connection	min.order quantity
1	100005	22	ø2.4mm	1
2	100013	22	ø2.4mm	1
3	102977	22	ø2.4mm	1



ignition cables



pos.	GEV No.	connection	CL (mm)	min.order quantity
1	102191	F2.8 / F2.8	300	1
2	100036	F2.8 / F2.8	500	1
3	100037	F2.8 / F2.8	900	1
4	100190	F2.8 / F2.8	1200	1

gas taps

PEL 20



technical data:

gas inlet M16x1.5 (tube ø 10mm)
bypass nozzle ø 0,35mm
gas outlet M16x1.5 (tube ø 10/8mm)
shaft diameter 8x6.5mm
shaft length 22/15mm
shaft flat lower

fig.	GEV No.	description	type	TCC	PC	min.order quantity
1	101094	gas tap PEL type 20S	20S	M8x1	-	1

PEL 21 - Universal



technical data:

gas inlet M16x1.5 (tube ø 10mm)
bypass nozzle ø 0,35mm
gas outlet M16x1.5 (tube ø 10/8mm)
shaft diameter 8x6.5mm
shaft length 22/15mm
shaft flat lower

fig.	GEV No.	description	type	TCC	PC	min.order quantity
1	101095	gas tap PEL type 21S	21S	M8x1	M10x1	1
1	101397	gas tap PEL type 21S	21S	M9x1	M10x1	1

PEL 21 - Garland



technical data:

gas inlet M16x1.5 (tube ø 10mm)
bypass nozzle ø 0.35mm
gas outlet M10x1 FT (tube ø 6mm)
shaft diameter 8x6.5mm
shaft length 37/15mm
shaft flat upper

fig.	GEV No.	description	type	TCC	PC	min.order quantity
1	106138	gas tap PEL type 21S	21S	M8x1	M10x1	1

PEL 22



technical data:

gas inlet M20x1.5 (tube ø 12mm)
bypass nozzle ø 0.35mm
gas outlet M20x1.5 (tube ø 12/10mm)
shaft diameter 10x8mm
shaft length 25/17mm
shaft flat lower

fig.	GEV No.	description	type	TCC	PC	min.order quantity
1	101086	gas tap PEL type 22S/O	22S/O	M9x1	M10x1	1



technical data:

gas inlet M20x1.5 (tube ø 12mm)
bypass nozzle ø 0.35mm
gas outlet M20x1.5 (tube ø 12/10mm)
shaft diameter 10x8mm
shaft length 25/17mm
shaft flat upper

fig.	GEV No.	description	type	TCC	PC	min.order quantity
1	101087	gas tap PEL type 22S/V	22S/V	M9x1	M10x1	1

magnet units



fig.	GEV No.	suitable for	version	min.order quantity
1	101060	PEL20-21/JUNKERS/EGA	standard	1
2	101058	PEL22/EGA24197	standard	1
3	101045	PEL23S	M9x1	1
3	101059	PEL23S	M10x1	1

gas tap front parts



fig.	GEV No.	suitable for	shaft ø (mm)	shaft L (mm)	shaft flat	min.order quantity
1	101205	PEL20	8x6.5	22/15	upper/lower	1
2	101206	PEL21	8x6.5	22/15	upper/lower	1
3	101201	PEL22	10x8	25/17	upper/lower	1

gas thermostats ROBERTSHAW



technical data:

temperature range 200-375°F
gas inlet 1/4" CCT (tube ø 1/4")
gas outlet 1/4" CCT (tube ø 1/4")
capillary pipe length 24" - 610mm
probe diameter 3/8" - 9.5mm
probe length 5 3/8" - 135mm
gland nut 3/8" NPT

fig.	GEV No.	type	t.max. (°C)	min.order quantity
1	580052 ¹	GSH30240000		1

¹with gland box 3/8" NPT



gas thermostats MINISIT

for heated cabinets

**technical data:**

temperature range 40-110°C
 gas inlet 1/2"
 gas outlet 3/8"
 thermocouple connection M9x1
 pilot connection M10x1
 probe diameter 5mm
 probe length 125mm
 capillary pipe length 1050mm
 probe type type A1
 pressure regulator 3-18mbar
 gland nut -

fig.	GEV No.	producer	type	t.max. (°C)	min.order quantity
1	106030	SIT	MINISIT 710	110	1

for deep fryers

**technical data:**

temperature range 120-200°C
 gas inlet 3/8"
 gas outlet 3/8"
 thermocouple connection M9x1
 pilot connection M10x1
 probe diameter 6mm
 probe length 105mm
 capillary pipe length 1050mm
 probe type type D1
 pressure regulator -
 gland nut M14x1.5

fig.	GEV No.	producer	type	t.max. (°C)	min.order quantity
1	106029	SIT	MINISIT 710	200	1

universal

**technical data:**

temperature range 110-190°C
 gas inlet 1/2"
 gas outlet 3/8"
 thermocouple connection M9x1
 pilot connection M10x1
 probe diameter 6mm
 probe length 102mm
 capillary pipe length 1050mm
 probe type type A3
 pressure regulator -
 gland nut -

fig.	GEV No.	producer	type	t.max. (°C)	min.order quantity
1	101135	SIT	MINISIT 710	190	1

**technical data:**

temperature range 100-340°C
 gas inlet 1/2"
 gas outlet 3/8"
 thermocouple connection M9x1
 pilot connection M10x1
 probe diameter 5mm
 probe length 68mm
 capillary pipe length 1050mm
 probe type type B1
 pressure regulator -
 gland nut -

fig.	GEV No.	producer	type	t.max. (°C)	min.order quantity
1	101132	SIT	MINISIT 710	340	1



fig.	GEV No.	description	min.order quantity
1	110068	knob suitable for ø 37mm	1

gas thermostats EUROSIT

**technical data:**

temperature range 110-190°C
 gas inlet 3/8"
 gas outlet 3/8"
 thermocouple connection M9x1
 pilot connection M10x1
 probe diameter 4mm
 probe length 202mm
 capillary pipe length 1050mm

fig.	GEV No.	producer	type	t.max. (°C)	min.order quantity
1	101188	SIT	630 Eurosit series	190	1

**technical data:**

temperature range 100-340°C
 gas inlet 3/8"
 gas outlet 3/8"
 thermocouple connection M9x1
 pilot connection M10x1
 probe diameter 4mm
 probe length 72mm
 capillary pipe length 1050mm

fig.	GEV No.	producer	type	t.max. (°C)	min.order quantity
1	101125	SIT	630 Eurosit series	340	1

ignition boxes

**technical data:**

number of electrodes 2
 waiting time 1,5s
 safety time 30s
 voltage 220-240V
 power 9VA
 frequency 50-60Hz

fig.	GEV No.	producer	type	equiv. no.	min.order quantity
1	107233	SIT	503EFD	0.503.702	1



technical data:
 number of electrodes 2
 waiting time -
 safety time 5s
 voltage 220-240V
 power 4VA
 frequency 50/60Hz

fig.	GEV No.	producer	type	min.order quantity
1	101184	HONEYWELL	S4565C 1033	1



technical data:
 number of electrodes 1
 waiting time 0s
 safety time 10s
 voltage 220-240V
 power 10VA
 frequency 50Hz

fig.	GEV No.	producer	type	min.order quantity
1	101165	HONEYWELL	S4560A 1008	1

gas pressure regulators



fig.	GEV No.	description	min.order quantity
1	250099	low pressure gas regulator type RV48LM - 1-2kPa, 4.8m³/h inlet 1/2", outlet 1/2"	1
1	250098	low pressure gas regulator type RV48LM - 1-2kPa, 4.8m³/h inlet 3/4", outlet 3/4"	1

gas valves BRAHMA




technical data:
 CE Reg.no. 63AQ0626

fig.	GEV No.	DN (mm)	connection	L (mm)	coil type	p max (bar)	min.order quantity
1	101948 ¹	15	1/2"	72	18811003	0.5	1
1	106069 ¹	25	3/4"	96	18813004	0.5	1
1	106071 ¹	30	1"	111	18813014	0.5	1
1	107782 ¹	30	1 1/2"	111	-	0.2	1

¹aluminium housing

gas hoses

SS – unbraided, plastic-coated




technical data:
 material unbraided

standard BS 669
 version with quick release connection

pos.	GEV No.	connector	L (mm)	min.order quantity
1	250100	1/2"	1000	1
2	250102	1/2"	1500	1
3	250103	3/4"	1000	1
4	250105	3/4"	1500	1
5	250120	1"	1000	1
6	250121	1"	1500	1

SS – braided, plastic-coated



technical data:
 material braided

standard BS 669
 version with quick release connection

pos.	GEV No.	connector	L (mm)	min.order quantity
1	250106	1/2"	1000	1
2	250108	1/2"	1500	1
3	250109	3/4"	1000	1
4	250111	3/4"	1500	1

thermocouple sets universal

super universal thermocouple sets



fig.	GEV No.	content	L (mm)	min.order quantity
1	102540	12-piece	600	1
1	102541	12-piece	900	1
1	102542	12-piece	1200	1
1	103265	12-piece	1500	1



fig.	GEV No.	content	L (mm)	min.order quantity
1	103267	12-piece	900	1

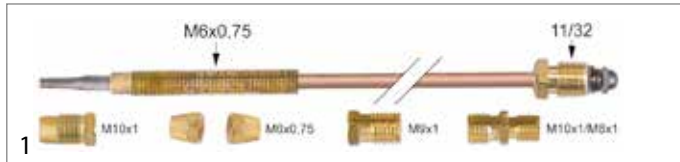



fig.	GEV No.	content	L (mm)	min.order quantity
1	102005	6-piece	600	1
1	102000	6-piece	900	1
1	102006	6-piece	1200	1
1	102461	6-piece	1500	1

super universal thermocouple sets SIT

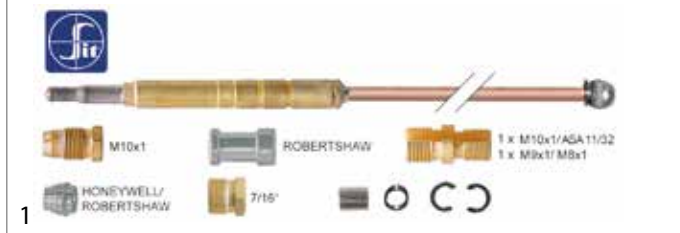


fig.	GEV No.	content	L (mm)	min.order quantity
1	107647	11-piece	900	1
1	107648	11-piece	1200	1

super universal thermocouple sets ROBERTSHAW




fig.	GEV No.	content	L (mm)	min.order quantity
1	107705	5-piece	18" - 455	1
1	107706	5-piece	24" - 610	1
1	107707	5-piece	30" - 760	1
1	107708	5-piece	36" - 915	1
1	107709	5-piece	48" - 1220	1
1	107710	5-piece	60" - 1525	1



fig.	GEV No.	content	L (mm)	min.order quantity
2	102281	5-piece	24" - 610	1
2	102282	5-piece	36" - 915	1
2	103227	5-piece	48" - 1220	1
2	103236	5-piece	60" - 1525	1
2	102283	5-piece	72" - 1825	1


plug-in thermocouples

SIT

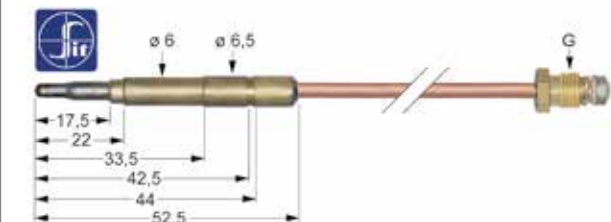

pos.	GEV No.	G	L (mm)	min.order quantity
1	107608	M9x1	500	1
2	107610	M9x1	750	1
3	107611	M9x1	850	1
4	107612	M9x1	1000	1
5	107613	M9x1	1200	1
6	107614	M9x1	1500	1


ROBERTSHAW

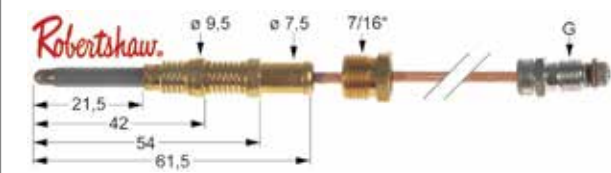

pos.	GEV No.	G	L (mm)	min.order quantity
1	102122	ASA 11/32	18" - 455	1
2	102276	ASA 11/32	24" - 610	1
3	102277	ASA 11/32	36" - 915	1
4	102278	ASA 11/32	48" - 1220	1

threaded thermocouples

SIT

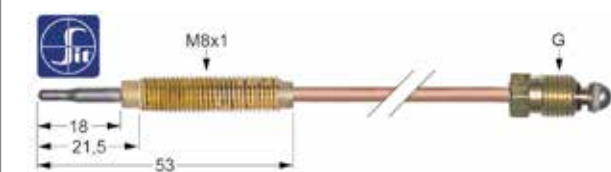

pos.	GEV No.	G	L (mm)	min.order quantity
1	107628	M8x1	320	1
2	107630	M8x1	600	1
3	107631	M8x1	850	1
4	107633	M8x1	1200	1
5	107636	M9x1	600	1


thermocouple interrupters



1

fig.	GEV No.	description	min.order quantity
1	101266	interrupter thread ASA 11/32	1
1	101258	interrupter thread M10x1	1
1	101264	interrupter thread M8x1	1
1	101265	interrupter thread M9x1	1

thermopiles

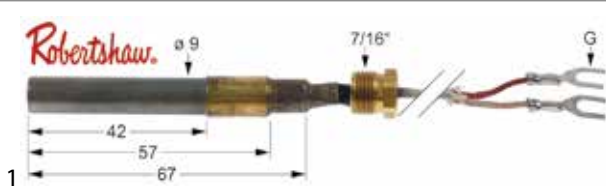


1

fig.	GEV No.	L (mm)	voltage (mV)	min.order quantity
1	102116	900	250-750	1



2

fig.	GEV No.	L (mm)	voltage (mV)	min.order quantity
2	580035	36" - 915	250-750	1

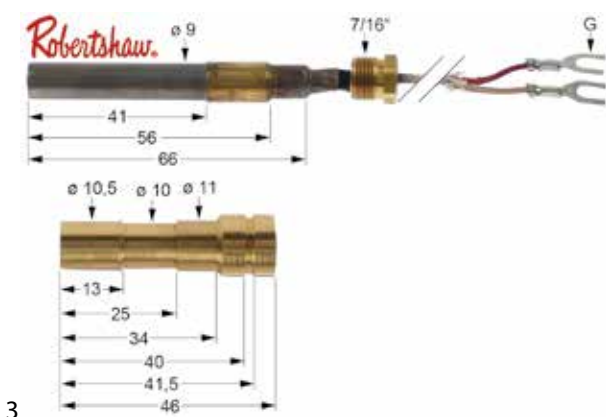

3

fig.	GEV No.	L (mm)	voltage (mV)	min.order quantity
3	103242	60" - 1525	250-750	1

gas tap greases



1

2

fig.	GEV No.	description	min.order quantity
1	890202	Fermit GLISSA - tube 20g High-grade lubricant for gas valves and fittings and actuators in accordance with DIN EN 377 Glissa all gas valve grease is resistant to all gases and gas mixtures mentioned in DVGW worksheet G 260 and corresponds to DIN DVGW 96.01e1055 Synthetic, non-dropping, ductile Temperature range: up to +150°C	1
2	890102	Fermit GLISSA - tube 60g High-grade lubricant for gas valves and fittings and actuators in accordance with DIN EN 377 Glissa all gas valve grease is resistant to all gases and gas mixtures mentioned in DVGW worksheet G 260 and corresponds to DIN DVGW 96.01e1055 Synthetic, non-dropping, ductile Temperature range: up to +150°C	1



mechanical components, equipment accessories

knobs



fig.	GEV No.	ø (mm)	shaft ø (mm)	shaft flat	min.order quantity
1	110078	70	6x4.6	universal	1
1	110081	70	8x6.5	universal	1
1	110080	70	10x8	universal	1



fig.	GEV No.	colour	symbol	t.max. (°C)	min.order quantity
1	112223	silver	energy regulator 1-circuit	-	1
2	112207	silver	gas tap PEL20	-	1
3	112206	silver	gas tap PEL21/22/23	-	1



fig.	GEV No.	colour	symbol	t.max. (°C)	min.order quantity
4	112209	silver	gas thermostat PEL24/25	-	1
5	112347	silver	switch 0-1	-	1
6	112212	silver	switch 4-position	-	1



fig.	GEV No.	colour	symbol	t.max. (°C)	min.order quantity
7	112213	silver	switch 7-position	-	1
8	112220	silver	thermostat	300	1
9	112247	silver	thermostat 1-10	-	1



fig.	GEV No.	symbol	t.max. (°C)	ø (mm)	shaft ø (mm)	shaft flat	min.order quantity
1	110237	energy regulator 1-10	-	50	6x4.6	upper	1
2	110075	energy regulator 1-3	-	50	6x4.6	upper	1
3	110133	thermostat	85	50	6x4.6	upper	1



fig.	GEV No.	symbol	t.max. (°C)	ø (mm)	shaft ø (mm)	shaft flat	min.order quantity
4	110119	thermostat	110	50	6x4.6	upper	1
5	110120	thermostat	180	50	6x4.6	upper	1
6	110121	thermostat	200	50	6x4.6	upper	1



fig.	GEV No.	symbol	t.max. (°C)	ø (mm)	shaft ø (mm)	shaft flat	min.order quantity
7	110122	thermostat	250	50	6x4.6	upper	1
8	110123	thermostat	300	50	6x4.6	upper	1
9	110126	zero mark	-	50	6x4.6	upper	1

shelf rails



fig.	GEV No.	description	min.order quantity
1	690330	rack L 1000mm W 22mm H 4mm aperture 3x8mm hole distance 12.5mm stainless steel	1




fig.	GEV No.	description	Qty (pcs)	min.order quantity
2	694700	shelf support L 31/28mm W 22mm H 18mm SS	12	1
3	694701	shelf support L 31/28mm W 22mm H 17mm SS with hook	12	1

rollers



technical data:
material ZCS/ZCS

bearing ball bearing
mounting distance 40/50mm

fig.	GEV No.	rollers (mm)	MP	min.order quantity
1	690351	25	front	1
2	690353	25	rear	1

bullet feet

plastic/SS



fig.	GEV No.				Qty (pcs)	min.order quantity
1	701390	40x40	1-1.2	23-62	4	1



fig.	GEV No.				Qty (pcs)	min.order quantity
2	701391	40x40	1-1.2	23-94	4	1

baffle filters



technical data:
thickness 48mm

pos.	GEV No.	W (mm)	H (mm)	size inch (")	material	min.order quantity
1	970854	490	390	-	AISI 304	1
2	970855	490	390	-	AISI 430	1
3	970852	490	490	-	AISI 304	1
4	970853	490	490	-	AISI 430	1
5	970856	395	395	16x16x2	AISI 304	1
6	970857	395	495	16x20x2	AISI 304	1
7	970858	445	445	18x18x2	AISI 304	1
8	970859	495	395	20x16x2	AISI 304	1
9	970860	495	495	20x20x2	AISI 304	1



electric components

power contactors

GENERAL ELECTRIC (AEG)



fig.	GEV No.	resistive load (A)	supply	(AC3/400V) (kW)	main contacts	auxiliary contacts	connection	type AEG	type GE	min.order quantity
1	380239	20	230VAC	8.4A/4	3NO	1NC	screw connection	LS05 01A	MC1A 301A	1
1	380238	20	230VAC	8.4A/4	3NO	1NO	screw connection	LS0510A	MC1A 310A	1
2	380245	25	230VAC	9A/4	3NO	1NC	screw connection	LS4K 01A	CL00A 301	1
2	380244	25	230VAC	9A/4	3NO	1NO	screw connection	LS4K 10A	CL00A 310	1
2	380262	32	230VAC	17A/7.5	3NO	1NC	screw connection	LS7K01A	CL02A 301	1
2	380261	32	230VAC	17A/7.5	3NO	1NO	screw connection	LS7K 10A	CL02A 310	1
3	380264	45	230VAC	25A/11	3NO	-	screw connection	LS11K 00A	CL25A 300	1
4	380265	60	230VAC	32A/16	3NO	1NO	screw connection	LS15K 00A	CL04A 310	1

KEDU



fig.	GEV No.	resistive load (A)	supply	(AC3/400V) (kW)	main contacts	auxiliary contacts	connection	type	min.order quantity
1	380873	16	230VAC	6.1A/2.2	2NO/2NC	-	screw connection	JD6.01	1
1	380872	16	230VAC	6.1A/2.2	3NO	1NC	screw connection	JD6.01	1
1	380871	16	230VAC	6.1A/2.2	3NO	1NO	screw connection	JD6.10	1
2	381206	20	240VAC	9A/4	3NO	1NC	screw connection	CKDC1C0927	1
2	381205	20	240VAC	9A/4	3NO	1NO	screw connection	CKDC1B0927	1
2	381207	20	240VAC	9A/4	4NO	-	screw connection	CKDC1H0927	1
3	381209	32	240VAC	16A/7.5	3NO	1NC	screw connection	CKDC2C1627	1
3	381208	32	240VAC	16A/7.5	3NO	1NO	screw connection	CKDC2B1627	1
3	381210	32	240VAC	16A/7.5	4NO	-	screw connection	CKDC2H1627	1
4	381211	65	240VAC	30A/15	3NO	-	screw connection	CKDC2A3027	1

power relays

fig.	GEV No.	producer	supply	SC (A)	function	connection	manuf. no.	min.order quantity
1	380139	FINDER	230VAC	16	2CO	F6.3	62.82.8.230.0000	1
1	380702	FINDER	230VAC	16	3NO	F6.3	62.83.8.230.0300	1
2	380687	FINDER	230VAC	30	2NO	F6.3	66.82.8.230.0300	1
3	380185	Italiana Relè	230VAC	30	1NO	F6.3	A10-230AC-FA	1

energy regulators

EGO

technical data: switching capacity 13A turn direction right function single-circuit power release 6-100%						
fig.	GEV No.	volt. (V)	shaft ø (mm)	mounting thread	Ref. No.	min.order quantity
1	380015	230	6x4.6	M4	50.17071.000 50.27021.010 50.57011.010 50.57021.010	1
1	380019	240	6x4.6	M4	50.57071.010	1

technical data: switching capacity 13A turn direction right function single-circuit power release 6-70%						
fig.	GEV No.	volt. (V)	shaft ø (mm)	mounting thread	Ref. No.	min.order quantity
1	381160	240	5x4	1/8"	50.57076.070	1

technical data: switching capacity 13A turn direction left function single-circuit power release 22-70%						
fig.	GEV No.	volt. (V)	shaft ø (mm)	mounting thread	Ref. No.	min.order quantity
1	380035	240	6x4.6	3/8"-24UNF	50.59070.048	1

fig.	GEV No.	symbol	ø (mm)	shaft ø (mm)	shaft flat	min.order quantity
1	110237	energy regulator 1-10	50	6x4.6	upper	1
2	110075	energy regulator 1-3	50	6x4.6	upper	1
3	110235	energy regulator 1-3	50	6x4.6	upper	1

UNITED AUTOMATION

technical data: voltage 240V switching capacity 15A turn direction right mounting thread M10x0.75					
fig.	GEV No.	version	shaft ø (mm)	equiv. no.	min.order quantity
1	381307	QVR dimmer switch	6.3	A14232E	1

technical data: voltage 240V switching capacity 17A turn direction right mounting thread M10x0.75					
fig.	GEV No.	version	shaft ø (mm)	equiv. no.	min.order quantity
1	381306	QVR dimmer switch	6.3	A13218E	1




1

technical data:
voltage 240V
switching capacity 15A
turn direction right
mounting thread M10x0.75

fig.	GEV No.	version	shaft ø (mm)	equiv. no.	min.order quantity
1	381305	QVR dimmer switch	6.3	A13202E	1
1	381308	QVR dimmer switch	5.6x6.4	A11203E	1

ROBERTSHAW



1

technical data:
switching capacity 15A
function single-circuit
turn direction left
shaft diameter 3.5x3.5mm
shaft length 15/16" - 1";
23,8 - 25,4mm

fig.	GEV No.	volt. (V)	power release (%)	Ref. No.	min.order quantity
1	381196	240	22-100	42-1158	1



2

technical data:
switching capacity 15A
function single-circuit
turn direction left
shaft diameter 3.5x3.5mm
shaft length 15/16" - 1";
23,8 - 25,4mm

fig.	GEV No.	volt. (V)	power release (%)	Ref. No.	min.order quantity
2	381395	240	5-100	INF-240-597	1

universal



1

technical data:
switching capacity 13A
turn direction right
function single-circuit
power release -

fig.	GEV No.	volt. (V)	shaft ø (mm)	mounting thread	Ref. No.	min.order quantity
1	380040	200-250	4.8x4.1	3/8"-24UNF	—	1



1

fig.	GEV No.	symbol	ø (mm)	shaft ø (mm)	shaft flat	min.order quantity
1	112646	energy regulator	43.5	4.8x4.1	upper	1

thermostats accessories

gland ducts



1

fig.	GEV No.	ET	IT	probe ø max. (mm)	WS	min.order quantity
1	550148	M12x0.75	M9x1	6.5	19	1

fasteners



1

fig.	GEV No.	description	min.order quantity
1	551326	centre mounting kit for thermostats and energy regulators	1

refrigeration controllers AKO



1

technical data:
relay output 1 NO-12A(9)
relay output 2 -
relay output 3 -
input 1 NTC/PTC
input 2 -
input 3 -
interface RS485 -

fig.	GEV No.	type	supply (V)	relay outputs	min.order quantity
1	379408 ¹	D14125	230	1	1

¹without probe

1

technical data:
relay output 1 CO-12A(9)
relay output 2 NO-5A(4)
relay output 3 NO-8A(4)
input 1 NTC/PTC
input 2 NTC/PTC/DI
input 3 DI
interface RS485 -

fig.	GEV No.	type	supply (V)	relay outputs	min.order quantity
1	379514 ¹	D14323	230	3	1

¹without probe

refrigeration controllers ELIWELL



1

technical data:
model IDP17D0700000
relay output 1 NO-12A(12)
relay output 2 -
relay output 3 -
input 1 NTC/PTC/Pt1000
input 2 -
input 3 -
input 4 -

fig.	GEV No.	type	supply (V)	relay outputs	min.order quantity
1	378298	IDPlus 961	230	1	1



technical data:
 model IDP2EDB700000
 relay output 1 NO-12A(12)
 relay output 2 CO-8A(4)
 relay output 3 NO-5A(2)
 input 1 NTC/PTC/Pt1000
 input 2 NTC/PTC/Pt1000
 input 3 NTC/PTC/Pt1000
 input 4 DI

fig.	GEV No.	type	supply (V)	relay outputs	min.order quantity
1	378299	IDPlus 974	230	3	1

temperature probes


NTC 10kOhm



PTC 1kOhm



microswitches

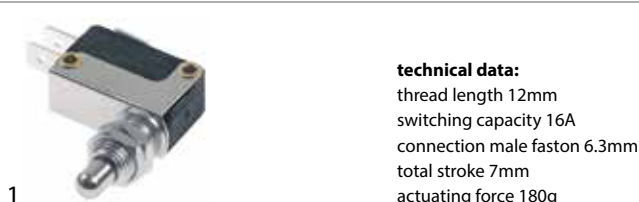

toggle switches



rocker switches

27.8x25mm



¹illuminated

30x11mm - IP40



30x11mm - IP65





30x22mm - IP65



fig.	GEV No.	description	function	volt. (V)	SC (A)	connection	min.order quantity
1	301003	switch	2NO	250	16	F6.3	1
2	301002	switch	2NO	250	16	F6.3	1
3	301001	switch	2NO	250	16	F6.3	1
4	301009	switch	2NO	250	16	F6.3	1
5	301036	protective cover	-	-	-	-	1



fig.	GEV No.	description	function	volt. (V)	SC (A)	connection	min.order quantity
1	347791	switch	2NO	230	20	F6.3	1
2	347974	switch	2NO	250	20	F6.3	1
3	347207	switch	2NO	250	20	F6.3	1
4	347973	switch	2NO	250	20	F6.3	1

momentary rocker switches

30x22mm - IP65



fig.	GEV No.	description	function	volt. (V)	SC (A)	connection	min.order quantity
1	301019	momentary switch	2NO	250	16	F6.3	1
2	301018	momentary switch	2NO	250	16	F6.3	1
3	301020	momentary switch	2NO	250	16	F6.3	1
4	301036	protective cover	-	-	-	-	1

push switches

ø25mm



fig.	GEV No.	description	function	volt. (V)	SC (A)	connection	min.order quantity
1	345161 ¹	switch	2NO	250	16	F6.3	1
2	345160 ¹	switch	2NO	250	16	F6.3	1
3	345162 ¹	switch	2NO	250	16	F6.3	1

¹illuminated

indicator lights

with screw socket ø10mm



fig.	GEV No.	colour	volt. (V)	connection	min.order quantity
1	346882	green	230	F6.3	1
2	346881	red	230	F6.3	1
3	346883	yellow	230	F6.3	1



fig.	GEV No.	colour	volt. (V)	connection	min.order quantity
1	359378	green	230	F6.3	1
2	359380	red	230	F6.3	1
3	359379	yellow	230	F6.3	1

with plug-in socket ø13mm



fig.	GEV No.	colour	volt. (V)	connection	min.order quantity
1	359142	green	230	F6.3	1
2	359141	red	230	F6.3	1
3	359143	yellow	230	F6.3	1

with plug-in socket ø14mm



fig.	GEV No.	colour	volt. (V)	connection	min.order quantity
1	359151	green	400	F6.3	1
2	359150	red	400	F6.3	1
3	359152	yellow	400	F6.3	1

oven lamps

light bulbs 300°C



fig.	GEV No.	t.max. (°C)	socket	P (W)	volt. (V)	ø (mm)	L (mm)	min.order quantity
1	359740	300	E14	15	230	22	20	1
1	357153	300	E14	25	230	25	55	1
2	359610	300	E14	15	230	22	46	1
2	359612	300	E14	25	230	25	55	1

light bulbs 500°C



fig.	GEV No.	t.max. (°C)	socket	P (W)	volt. (V)	ø (mm)	L (mm)	min.order quantity
1	357099	500	E14	15	240	22	50	1
1	359448	500	E14	25	240	24	54	1
2	357100	500	E14	25	240	45	75	1
2	357101	500	E14	40	240	45	75	1
3	357102	500	E27	25	240	45	72	1
3	357103	500	E27	40	240	45	72	1

halogen lamps 300°C



fig.	GEV No.	socket	volt. (V)	P (W)	Temp.Res. (°C)	min.order quantity
1	359728	E14	230	40	300	1
2	359683	E27	240	60	300	1



fig.	GEV No.	socket	volt. (V)	P (W)	Temp.Res. (°C)	min.order quantity
1	357188	G4	12	5	300	1
1	357191	G4	12	10	300	1
1	357193	G4	12	20	300	1
2	357195	G9	230	25	300	1
2	357196	G9	230	40	300	1
3	359945	G9	230	25	300	1
3	359946	G9	230	40	300	1

halogen lamps 500°C



fig.	GEV No.	socket	volt. (V)	P (W)	Temp.Res. (°C)	min.order quantity
1	359579	G4	12	5	500	1
1	359596	G4	12	10	500	1
1	359599	G4	12	20	500	1
2	359074	G6.35	12	35	500	1

hard-glass infrared lamps



fig.	GEV No.	socket	volt. (V)	P (W)	ø (mm)	L (mm)	min.order quantity
1	357094	E27	240	150	125	173	1
1	359463	E27	240	250	125	173	1
2	357095	E27	240	150	125	173	1
2	358097	E27	240	250	125	173	1
2	357205	E27	240	275	125	170	1
2	360623	E27	240	300	125	180	1
2	360539	E27	240	375	120	180	1



fig.	GEV No.	description	min.order quantity
1	357169	lamp socket E27 250V mounting ø 36mm mounting measurements 39mm ø 43,5mm L 48mm	1

linear lamps

sockets R7s



fig.	GEV No.	description	ø (mm)	H (mm)	connection	MD (mm)	min.order quantity
1	359726	lamp socket	18	28	cable 230mm	-	1

R7s - 117.6mm




technical data:
height 40mm

connection cable 230mm
mounting distance 70mm

fig.	GEV No.	description	for length of lamp	min.order quantity
1	359544	lamp socket	117.6	1



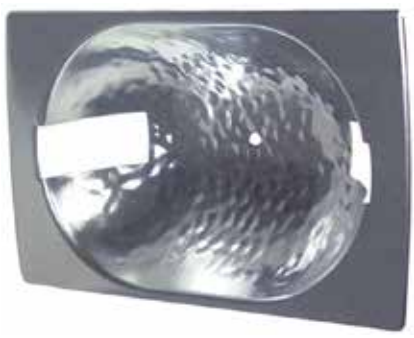

1

fig.	GEV No.	description	min.order quantity
1	359545	reflector L 117,6mm for infrared quartz lamp	1



1

fig.	GEV No.	description	L (mm)	volt. (V)	P (W)	min.order quantity
1	359313	halogen lamp	117.6	230	150	1
1	359647	halogen lamp	117.6	230	200	1
1	359620	halogen lamp	117.6	230	300	1
1	359621	halogen lamp	117.6	230	500	1



2

fig.	GEV No.	description	L (mm)	volt. (V)	P (W)	min.order quantity
2	360667 ¹	infrared lamp	117.6	240	150	1
2	360700 ¹	infrared lamp	117.6	240	200	1
2	359750 ¹	infrared lamp	117.6	240	300	1
2	360701 ¹	infrared lamp	117.6	240	500	1

¹jacketed



3

fig.	GEV No.	description	L (mm)	volt. (V)	P (W)	min.order quantity
3	359628	infrared lamp	117.6	240	300	1
3	360702	infrared lamp	117.6	240	500	1

R7s - 218mm



1

technical data:
height 62mm

connection cable 200mm
mounting distance 120mm

fig.	GEV No.	description	for length of lamp (mm)	min.order quantity
1	359583	lamp socket	218	1



1

fig.	GEV No.	description	L (mm)	volt. (V)	P (W)	min.order quantity
1	359535 ¹	infrared lamp	218	240	300	1
1	359536 ¹	infrared lamp	218	240	500	1

¹jacketed

R7s - 349mm



1

technical data:
height 62mm

connection cable 200mm
mounting distance 250mm

fig.	GEV No.	description	for length of lamp (mm)	min.order quantity
1	359584	lamp socket	349	1



1

fig.	GEV No.	description	L (mm)	volt. (V)	P (W)	min.order quantity
1	359537 ¹	infrared lamp	349	240	1000	1

¹jacketed

Z-ceramic - 218mm



1

technical data:
length 220mm
width 47mm

height 62mm
mounting distance 120mm

fig.	GEV No.	description	for length of lamp (mm)	min.order quantity
1	359658	lamp socket	218	1



1

fig.	GEV No.	description	L (mm)	volt. (V)	P (W)	min.order quantity
1	360699 ¹	infrared lamp	218	240	200	1
1	359538 ¹	infrared lamp	218	240	300	1
1	359539 ¹	infrared lamp	218	240	500	1

¹jacketed



2

fig.	GEV No.	description	L (mm)	volt. (V)	P (W)	min.order quantity
2	359581	infrared lamp	218	240	300	1
2	359582	infrared lamp	218	240	500	1

Z-ceramic - 349mm



1

technical data:length 349mm
width 47mmheight 62mm
mounting distance 250mm

fig.	GEV No.	description	for length of lamp (mm)	min.order quantity
1	359541	lamp socket	349	1



1

fig.	GEV No.	description	L (mm)	volt. (V)	P (W)	min.order quantity
1	359678 ¹	infrared lamp	349	230	365	1

¹jacketed

2

fig.	GEV No.	description	L (mm)	volt. (V)	P (W)	min.order quantity
2	359626	infrared lamp	349	220-250	1000	1

fluorescent lamps

starter



1

fig.	GEV No.	P (W)	min.order quantity
1	380464	4-65	1

axial fans



pos.	GEV No.	L (mm)	W (mm)	H (mm)	voltage	P (W)	connection	min.order quantity
1	601130 ¹	80	80	25	230VAC	13/14	F2.8	1
2	601081 ¹	80	80	38	230VAC	14/13.5	F2.8	1
3	601131 ¹	119	119	25	230VAC	19/18	F2.8	1
4	601080 ¹	119	119	38	230VAC	23/20	F2.8	1
5	601457 ¹	127	127	38	12VDC	12.72	cabl 300mm	1

¹with ball bearings

refrigeration motors

ELCO - multi fit



1

technical data:voltage 230V
frequency 50/60Hz
bearing slide bearing
connection cable 500mm
speed 1300/1550rpm
version 5 mounting options

fig.	GEV No.	P (W)	type	min.order quantity
1	601430	5	VNT5-13/027	1
1	602076	7	VNT5-13/027	1
1	601427	10	VNT10-20/028	1
1	601528	16	VNT16-25/029	1
1	602057	18	VNT18-30/312	1
1	601529	25	VNT25-40/030	1
1	601530	34	VNT34-45/031	1

Import - multi fit

**technical data:**voltage 230V
cable length 500mm
speed 1300rpm
version 5 mounting options
bearing slide bearing

pos.	GEV No.	P (W)	type	min.order quantity
1	601020	5	YZF5-13-18/26	1
2	601022	10	YZF10-20-18/26	1
3	601023	16	YZF16-25-18/26	1
4	601024	25	YZF25-40-18/26	1
5	601050	34	YZF34-45-18/26	1

hot air fans



1

fig.	GEV No.	volt. (V)	P (W)	freq. (Hz)	D (mm)	min.order quantity
1	601011	220-240	40	50/60	150	1



terminals and connectors



fig.	GEV No.	description	size (mm)	CS (mm ²)	min.order quantity
1	550008	ring terminal	4.3	1.0-2.5	1
1	550009	ring terminal	5.3	1.0-2.5	1
1	550010	ring terminal	6.3	1.0-2.5	1
2	550001	female faston	6.3x0.8	1.0-2.5	1
3	550012	plug connector	6.3x0.8	1.0-2.5	1

porcelain clamps



fig.	GEV No.	NP (-pole)	CS (mm ²)	max. (A)	max (V)	MD (mm)	Qty (pcs)	min.order quantity
1	550112	2	2.5	10	250	-	1	1
1	555112	2	2.5	10	250	-	10	1
1	550115	2	10	30	450	-	1	1
1	555115	2	10	30	450	-	5	1
2	550113	3	2.5	32	250	14	1	1
2	555113	3	2.5	32	250	14	5	1
2	550116	3	10	30	450	16	1	1
2	555116	3	10	30	450	17	5	1
3	550114	4	2.5	10	250	18	1	1
3	555114	4	2.5	10	250	18	5	1
3	550414	4	10	30	450	29	1	1

connecting clamps



fig.	GEV No.	NP (-pole)	max. (A)	max (V)	connection	Temp.Res. (°C)	min.order quantity
1	550278	3	40	400	ø6mm ² / F6.3	150	1
2	550349	4	40	400	ø6mm ² / F6.3	150	1
3	550411	6	40	450	ø6mm ² / F6.3	150	1



fig.	GEV No.	NP (-pole)	max. (A)	max (V)	connection	Temp.Res. (°C)	min.order quantity
4	550534 ¹	3	40	450	ø6mm ² / F6.3	150	1
5	550961 ¹	4	40	450	ø6mm ² / F6.3	150	1
6	550977 ¹	6	40	450	ø6mm ² / F6.3	150	1

¹with ground lug

protective contact plugs



fig.	GEV No.	material	min.order quantity
1	551328	rubber	1
2	551327	TP	1

spiral cables



fig.	GEV No.	plug type	CS (mm ²)	NP (-pole)	L (mm)	expansion	min.order quantity
1	551329	BS1363	1.5	3	500	5:1	1

nickel wire

**technical data:**

permanent temperature -60 up to +350°C
maximum temperature 400°C
rated voltage 300/500V

test voltage 2000V
conductor nickel wire
insulation glass fibre braiding/silicone rubber

pos.	GEV No.	CS (mm ²)	colour	Qty (m)	min.order quantity
1	550087	1.5	brown	10	1
2	550088	2.5	brown	10	1
3	550089	4	brown	10	1

copper wire

**technical data:**

permanent temperature -60 up to +200°C
maximum temperature 250°C
rated voltage 300/500V

test voltage 2000V
conductor nickel-plated copper wire
insulation glass fibre braiding/silicone rubber

pos.	GEV No.	CS (mm ²)	colour	Qty (m)	min.order quantity
1	550078	1.5	blue	10	1
2	550079	2.5	blue	10	1
3	550076	2.5	brown	10	1
4	550082	2.5	green/yellow	10	1
5	550077	4	brown	10	1



insulated hoses

**technical data:**

material silicone impregnated glass fibre braiding

permanent temperature 450°C
maximum temperature 500°C
flashover voltage 800V

pos.	GEV No.	ID ø (mm)	Qty (m)	min.order quantity
1	550050	6	10	1
2	550051	8	10	1
3	550052	10	10	1
4	550053	12	10	1

solenoid valves

TP



fig.	GEV No.	version	volt. (V)	inlet	outlet (mm)	NS	min.order quantity
1	370017	single	230	3/4"	11.5	DN10	1
1	370018	single	230	3/4"	14	DN10	1
2	370021	double	230	3/4"	11.5	DN10	1
2	370022	double	230	3/4"	14	DN10	1
3	370025	triple	230	3/4"	11.5	DN10	1



fig.	GEV No.	version	volt. (V)	inlet	outlet (mm)	NS	min.order quantity
1	370015	single	230	3/4"	11.5	DN10	1
1	370016	single	230	3/4"	14	DN10	1
2	370019	double	230	3/4"	11.5	DN10	1
2	370020	double	230	3/4"	14	DN10	1
3	370023	triple	230	3/4"	11.5	DN10	1
3	370024	triple	230	3/4"	14	DN10	1

ELBI



fig.	GEV No.	version	volt. (V)	inlet	outlet (mm)	NS	min.order quantity
1	373017	single	230	3/4"	11.5	DN10	1
1	373018	single	230	3/4"	14	DN10	1
2	373021	double	230	3/4"	11.5	DN10	1
2	373022	double	230	3/4"	14	DN10	1
3	373025	triple	230	3/4"	11.5	DN10	1



fig.	GEV No.	version	volt. (V)	inlet	outlet (mm)	NS	min.order quantity
1	373015	single	230	3/4"	11.5	DN10	1
1	373016	single	230	3/4"	14	DN10	1
2	373019	double	230	3/4"	11.5	DN10	1
2	373020	double	230	3/4"	14	DN10	1
3	373023	triple	230	3/4"	11.5	DN10	1

pumps

**technical data:**inlet diameter 28mm
outlet diameter 26mm
voltage 230V
frequency 50Hz
phases 1 phase
power 0.074kW
length 190mm

fig.	GEV No.	producer	type	min.order quantity
1	500037	FIR	2211.1410	1

**technical data:**inlet diameter 28mm
outlet diameter 26mm
voltage 230V
frequency 50Hz
phases 1 phase
power 0.27kW
length 190mm

fig.	GEV No.	producer	type	min.order quantity
1	500534	HANNING	UP60-184	1



drain pumps



1

technical data:
diameter inlet 24/30mm
diameter outlet 24mm
voltage 230V
power 30W

fig.	GEV No.	producer	type	min.order quantity
1	500573	HANNING	DPS25-032	1



1

technical data:
diameter inlet 24/30/35/39mm
diameter outlet 22/31mm
voltage 230V
power 40W

fig.	GEV No.	producer	type	min.order quantity
1	499315	ASKOLL	M231 XP	1



1

technical data:
diameter inlet 24mm
diameter outlet 22mm
voltage 230V
power 40W

fig.	GEV No.	producer	type	min.order quantity
1	500054	ASKOLL	R113	1



1

technical data:
diameter inlet 30mm
diameter outlet 22mm
voltage 230V
power 40W

fig.	GEV No.	producer	type	min.order quantity
1	500215	ASKOLL	M231 XP	1



1

technical data:
diameter inlet 30mm
diameter outlet 22mm
voltage 230V
power 40W

fig.	GEV No.	producer	type	min.order quantity
1	500346	ASKOLL	M231 XP	1



1

technical data:
diameter inlet 30mm
diameter outlet 24mm
voltage 230V
power 100W

fig.	GEV No.	producer	type	min.order quantity
1	500044	HANNING	BE28B4-017	1

operating capacitors



1

fig.	GEV No.	capacity (µF)	volt (V)	ø (mm)	L (mm)	mounting	connection	min.order quantity
1	365009	2.5	400	55	365	M8	F6.3	1
1	365010	3.5	400	31.5	55	M8	F6.3	1
1	365031	4	450	31	58	M8	F6.3	1
1	365011	4.5	400	31.5	55	M8	F6.3	1
1	365017	5	450	28	54	M8	F6.3	1
1	365012	6.3	450	30	61	M8	F6.3	1
1	365013	8	400	31.5	55	M8	F6.3	1
1	365015	10	400	35.5	59	M8	F6.3	1
1	365014	12.5	400	35	70	M8	F6.3	1
1	365020	14	400	35	70	M8	F6.3	1
1	365021	16	425	35	73	M8	F6.3	1

water technology

water taps



1



2



3




fig.	GEV No.	upper part	handle type	connection	min.order quantity
1	545959	ceramic tap head 1/2"	hexagonal	1/2"	1
2	545958	ceramic tap head 1/2"	lever	1/2"	1

fig.	GEV No.	upper part	handle type	connection	min.order quantity
3	545960	ceramic tap head 1/2"	star	1/2"	1



1



2



3




fig.	GEV No.	upper part	handle type	connection	min.order quantity
1	545956	ceramic tap head 1/2"	hexagonal	1/2"	1
2	545955	ceramic tap head 1/2"	lever	1/2"	1

fig.	GEV No.	upper part	handle type	connection	min.order quantity
3	545957	ceramic tap head 1/2"	star	1/2"	1



1



2



3




fig.	GEV No.	upper part	handle type	connection	min.order quantity
1	545962	ceramic tap head 1/2"	hexagonal	1/2"	1
2	545961	ceramic tap head 1/2"	lever	1/2"	1

fig.	GEV No.	upper part	handle type	connection	min.order quantity
3	545963	ceramic tap head 1/2"	star	1/2"	1

pre-rinse hoses



1

technical data:
 operating pressure 10bar
 burst pressure 40bar
 temperature max. 90°C
 approval WRAS/ACS

fig.	GEV No.	connections	L (mm)	min.order quantity
1	548075	7/8"-20UNEF	1100	1



1

technical data:
 operating pressure 10bar
 burst pressure 40bar
 temperature max. 90°C
 approval WRAS/ACS

fig.	GEV No.	connections	L (mm)	min.order quantity
1	547594	7/8"-20UNEF	950	1

spray guns



fig.	GEV No.	description	connection	Qmax. at ca. 4bar	min.order quantity
1	549333	spray gun	7/8"-20UNEF	12 l/min	1
2	545132	spray gun	7/8"-20UNEF	4,5 l/min	1
3	593011	spray gun	7/8"-20UNEF	12 l/min	1

tap heads and handles



fig.	GEV No.	description	TS	RA (°)	application	min.order quantity
1	593016	lever handle	-	-	cold/hot water	1
2	593014	ceramic tap head	1/2"	90	cold water	1
3	593015	ceramic tap head	1/2"	90	hot water	1



fig.	GEV No.	description	application	min.order quantity
1	547750	tap head	cold water	1
1	547751	tap head	hot water	1
2	547752	lever handle	cold/hot water	1

drain hoses

with 1 end connector



fig.	GEV No.	NS	L (mm)	straight ø inside (mm)	straight ext. ø (mm)	outer hose ø (mm)	min.order quantity
1	530587	DN28	2000	32	40	35	1



fig.	GEV No.	NS	L (mm)	elbow ø inside (mm)	elbow ext. ø (mm)	outer hose ø (mm)	min.order quantity
1	505082	DN25	1500	48	58	31	1

with 2 end connectors



fig.	GEV No.	NS	L (mm)	A int. ø (mm)	A ext. ø (mm)	B int. ø (mm)	B ext. ø (mm)	min.order quantity
1	507329	DN19	1500	19	24	21	28	1
1	511205	DN19	1500	23	29	29	35	1
1	501136	DN19	2500	19	24	21	28	1
1	530570	DN21	2000	21	25	20/29	27/35	1
1	530608	DN24	1500	24	28	28	35	1
1	530607	DN24	2000	24	28	28	35	1
1	530573	DN31	1500	31	35	40	46	1
1	530574	DN31	2000	31	35	40	46	1



fig.	GEV No.	NS	L (mm)	straight ø inside (mm)	straight ext. ø (mm)	elbow ø inside (mm)	elbow ext. ø (mm)	outer hose ø (mm)	min.order quantity
1	506207	DN19	1500	19	24	21	27	25	1
1	505084	DN19	2000	21	26	21	27	27	1
1	530571	DN24	1500	24	29	29	35	28	1
1	519272	DN24	1500	32	35	40	46	38	1
1	530572	DN24	2000	24	29	29	35	29	1
1	518103	DN32	2000	31	35	51	58	38	1

PVC supply hoses

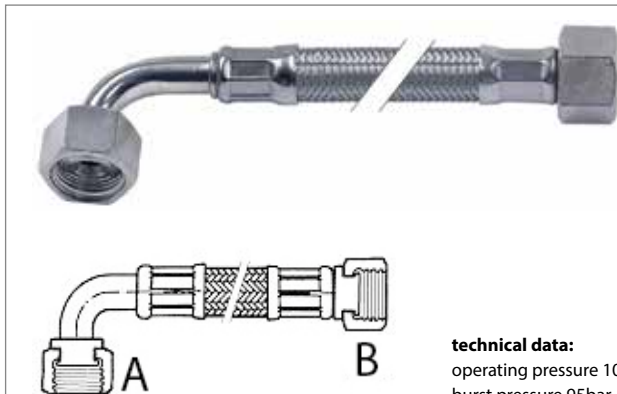


fig.	GEV No.	NS	connections	L (mm)	operating p. (bar)	t.max. (°C)	approval	min.order quantity
1	520460	DN12	3/4"	1500	10	90	WRAS	1



fig.	GEV No.	NS	connections	L (mm)	operating p. (bar)	t.max. (°C)	approval	min.order quantity
2	520462	DN12	3/4"	1500	10	90	WRAS	1

stainless steel flexi hoses



technical data:
operating pressure 10bar
burst pressure 95bar

pos.	GEV No.	NS	A	B	L (mm)	approval	min.order quantity
1	520563	DN10	1/2"	1/2"	1000	DVGW	1
2	520564	DN10	1/2"	1/2"	1500	DVGW	1
3	520636	DN10	1/2"	1/2"	2000	DVGW	1
4	520005	DN10	3/4"	3/4"	1500	DVGW	1
5	520578	DN10	3/4"	3/4"	2000	DVGW	1
6	520006	DN10	3/4"	3/4"	2500	DVGW	1
7	520629	DN12	3/4"	3/4"	1000	DVGW	1
8	520008	DN12	3/4"	3/4"	1500	DVGW	1
9	520628	DN12	3/4"	3/4"	2000	DVGW	1
10	520009	DN12	3/4"	3/4"	2500	DVGW	1
11	520004	DN15	3/4"	3/4"	1500	-	1
12	520007	DN15	3/4"	3/4"	2500	-	1

Y-pieces



fig.	GEV No.	TS	material	min.order quantity
1	520052	3/4" IT - 3/4" ET - 3/4" ET	plastic	1

standpipes



fig.	GEV No.	size	usable height (mm)	overall height (mm)	ED ø (mm)	material	min.order quantity
1	515089	1 1/2"	-	40	71	SS	1
2	515135	1 1/2"	160	195	48	SS/plastic	1
2	515106	1 1/2"	210	245	48	SS/plastic	1
2	515107	1 1/2"	260	295	48	SS/plastic	1
2	515108	1 1/2"	310	340	48	SS/plastic	1

HT drain pipes

HT bends



fig.	GEV No.	NS	connection	version	min.order quantity
1	515152	DN40	1 sleeve + pipe	45-88° adjustable	1
1	515153	DN50	1 sleeve + pipe	45-88° adjustable	1
2	515161	DN40	2 sleeves	45-88° adjustable	1
2	515162	DN50	2 sleeves	45-88° adjustable	1
3	515151	DN50	1 sleeve + pipe	0-90° adjustable	1

hose nipples



fig.	GEV No.	DN (mm)	for hose ID (mm)	min.order quantity
1	515145	32	8/10/13/19/25	1
1	515144	40	8/10/13/19/25	1
1	515143	50	8/10/13/19/25	1
2	515147	40	8/10/13/19/25	1
3	515146	50	19/21	1

HT reducers



fig.	GEV No.	NS	min.order quantity
1	515158	DN50/40	1
2	515160	DN50/40	1

HT telescopic pipes



fig.	GEV No.	NS	L (mm)	min.order quantity
1	515159	DN50	250-400	1

HT connection hoses



fig.	GEV No.	NS	L (mm)	min.order quantity
1	515154	DN50 - DN40/50	250	1
1	515155	DN50 - DN40/50	500	1
1	515156	DN50 - DN40/50	750	1
1	515157	DN50 - DN40/50	1000	1

hose connectors



technical data:
material plastic

fig.	GEV No.	hose ø (mm)	min.order quantity
1	515148	8/10/13/19/25	1

peristaltic dosing pumps

without control



technical data:
supply 230 VAC
hose connector 4x6mm
type MP3

fig.	GEV No.	pump rate (l/h)	application	hose	min.order quantity
1	361097	0.5	rinse aid	silicone	1
1	361098	1.5	detergent	Santoprene	1
1	361685	3	detergent	Santoprene	1

with time control



technical data:
supply 230 VAC
hose connector 4x6mm
type MP3-T

fig.	GEV No.	pump rate (l/h)	application	hose	min.order quantity
1	361793	0.5	rinse aid	silicone	1
1	361000	3	detergent	Santoprene	1

pump hoses



fig.	GEV No.	application	HCø (mm)	hose type	min.order quantity
1	361284	detergent	4x6	Santoprene	1



fig.	GEV No.	application	HCø (mm)	hose type	min.order quantity
2	361487	rinse aid	4x6	silicone	1



fig.	GEV No.	application	hose ø (mm)	HCø (mm)	hose	min.order quantity
1	361238	detergent	6x10	6	Santoprene	1



fig.	GEV No.	application	hose ø (mm)	HCø (mm)	hose	min.order quantity
2	361815	detergent	6x10	4x6	Santoprene	1



fig.	GEV No.	application	hose ø (mm)	HCø (mm)	hose	min.order quantity
3	361135	rinse aid	3x8	4x6	Sekobril	1

membrane dosing pumps

self-priming



technical data:

inlet 4x6mm
outlet 4x6mm
pressure connection ø 4x6mm
suction connection 4x6mm

fig.	GEV No.	type	application	min.order quantity
1	361370	model 2	rinse aid	1

self-priming with supporting pressure



technical data:

pressure connection ø 4x6mm
suction connection 4x6mm
auxiliary pressure connection 12mm

fig.	GEV No.	application	min.order quantity
1	361883	rinse aid	1

accessories for dosing pumps

PVC hoses



pos.	GEV No.	ID ø (mm)	ED ø (mm)	L (m)	min.order quantity
1	520090	4	6	2	1
2	570026	4	6	100	1

nylon hoses



fig.	GEV No.	ID ø (mm)	ED ø (mm)	L (m)	operating p. (bar)	burst p. (bar)	t.max. (°C)	min.order quantity
1	520091	4	6	2	10	50	100	1
1	520251	4	6	50	10	50	100	1

container filters



fig.	GEV No.	HCø (mm)	min.order quantity
1	361230	4x6	1
2	361462	4x6	1

non-return valves



fig.	GEV No.	inlet (mm)	outlet	L (mm)	min.order quantity
1	361147	4x6	1/8"	50	1

tank inlets



fig.	GEV No.	material	mounting	HCø (mm)	min.order quantity
1	361855	stainless steel	M10	4/5/6	1
1	361856	stainless steel	M12	4/5/6	1

hose sets



technical data:
hose type 4x6mm
hose length 2m

material PVC
scope of delivery 2x hose/container filter/tank intake

fig.	GEV No.	app.	min.order quantity
1	361142	detergent	1



technical data:
hose type 4x6mm
hose length 2m

material PVC/nylon hose
scope of delivery container filter/non-return valve

fig.	GEV No.	app.	min.order quantity
1	361144	rinse aid	1



water filters BRITA

filter head



1

fig.	GEV No.	connection	blend (%)	min.order quantity
1	530836	3/8"	30	1
1	530464	3/8"	0-70	1

PURITY C Quell ST



1

technical data:
 maximum operation pressure 8.6bar flow rate 100l/h
 water temperature +4 up to +30°C

fig.	GEV No.	type	capacity (l)	min.order quantity
1	530832	PURITY C50 Quell ST	435-960	1
1	530833	PURITY C150 Quell ST	1278-2408	1
1	530834	PURITY C300 Quell ST	2199-4000	1
1	530835	PURITY C500 Quell ST	4125-6800	1

PURITY Quell ST



1

technical data:
 maximum operation pressure 6.9bar water temperature +4 up to +30°C

fig.	GEV No.	type	capacity (l)	FR (l/h)	min.order quantity
1	530856	PURITY 450 Quell ST	2240-4217	350	1
1	530845	PURITY 600 Quell ST	4420-7207	120	1
1	530846	PURITY 1200 Quell ST	7253-13187	120	1

PURITY Steam



1

technical data:
 maximum operation pressure 6.9bar flow rate 500l/h
 water temperature +4 up to +30°C

fig.	GEV No.	type	capacity (l)	min.order quantity
1	530868	PURITY 600 Steam	4734-5771	1
1	530869	PURITY 1200 Steam	9521-10800	1

PURITY Clean



1

technical data:
 maximum operation pressure 6bar flow rate 600l/h
 water temperature +4 up to +60°C

fig.	GEV No.	type	capacity (l)	min.order quantity
1	530378	Purity 1200 Clean	12000	1

PURITY Clean Extra



1

technical data:
 maximum operation pressure 6bar flow rate 300l/h
 water temperature +4 up to +60°C

fig.	GEV No.	type	capacity (l)	min.order quantity
1	530849	Purity 1200 Clean Extra	5000	1



water filters CUNO/3M



1

technical data:
capacity 4000l
flow rate 114l/h

maximum operation pressure 8.6bar
water temperature max. 38°C

fig.	GEV No.	type	for filter head	min.order quantity
1	530478	AP2-C405-SG	AP2	1

consumables

assortment cases



Blindrivete (Aluminium)
Blind rivets (aluminium)
Remaches ciegos (aluminio)
Rivets aveugle (aluminium)
Rivetti ciechi (alluminio)

100x ø 3,2mm, L 6mm
100x ø 3,2mm, L 8mm
100x ø 3,2mm, L 10mm
100x ø 4,0mm, L 8mm
100x ø 4,0mm, L 10mm
100x ø 4,0mm, L 12mm
50x ø 4,8mm, L 7mm
50x ø 4,8mm, L 9mm
50x ø 4,8mm, L 11mm

Blindrivete (CNS)
Blind rivets (SS)
Remaches ciegos (acero inox)
Rivets aveugle (acier inox)
Rivetti ciechi (acciaio inox)

100x ø 3,2mm, L 6mm
100x ø 3,2mm, L 8mm
100x ø 3,2mm, L 10mm
50x ø 3,8mm, L 6mm
50x ø 3,8mm, L 10mm
50x ø 4,0mm, L 7,5mm
50x ø 4,8mm, L 9mm
50x ø 4,8mm, L 10mm



Dichtblindrivete (CNS)
Sealed blind rivets (SS)
Remaches ciegos sellados (acero inox)
Rivets aveugles étanches (acier inox)
Rivetti ciechi e stagni (acciaio inox)

100x ø 3,2mm, L 10mm

1x 801491

1

fig.	GEV No.	description	min.order quantity
1	403507	assortment case blind rivets with riveting pliers Profi	1



(Aluminium)
(aluminium)
(aluminio)
(aluminium)
(Alluminio)

50x M4
ø 6mm
L 8mm
50x M5
ø 7mm
L 12mm
50x M6
ø 9mm
L 13,5mm



(CNS)
(SS)
(acero inox)
(acier inox)
(acciaio inox)

30x M4
ø 5,9mm
L 11,5mm
30x M5
ø 6,5mm
L 13mm
30x M6
ø 8,9mm
L 15mm



1x 801493

2

fig.	GEV No.	description	min.order quantity
2	403508	assortment case riveting nuts sizes M4/M5/M6	1



W2

Band (Edelstahl) - Schraube (Messing)
Tape (stainless steel) - screw (brass)
Cinta (acero inoxidable) - tornillo (latón)
Bande (acier inox) - vis (laiton)
Nastro (acciaio inox) - vite (ottone)

W2
10x ø 8-12mm
10x ø 10-16mm
10x ø 12-20mm
10x ø 16-27mm
10x ø 20-32mm
10x ø 25-40mm
5x ø 32-50mm
5x ø 50-70mm
5x ø 60-80mm

W4

Band (Edelstahl) - Schraube (Edelstahl)
Tape (stainless steel) - screw (stainless steel)
Cinta (acero inoxidable) - tornillo (acero inoxidable)
Bande (acier inox) - vis (acier inox)
Nastro (acciaio inox) - vite (acciaio inox)

W4
5x ø 12-20mm
5x ø 40-60mm

W4
1x 3m

3

fig.	GEV No.	description	min.order quantity
3	402955	assortment case hose clamps	1

W4

Band (Edelstahl)
Tape (stainless steel)
Cinta (acero inoxidable)
Bande (acier inox)
Nastro (acciaio inox)

20x W4
ø 6,0-7,0mm
ø 7,0-8,7mm
ø 7,8-9,5mm
ø 8,8-10,5mm
ø 9,6-11,3mm
ø 9,8-12,3mm
ø 10,8-13,3mm
ø 11,3-13,8mm
ø 12,0-14,5mm
ø 13,2-15,7mm
ø 14,5-17,0mm
ø 15,3-18,5mm
ø 16,6-19,8mm
ø 17,8-21,0mm

4

fig.	GEV No.	description	min.order quantity
4	403242	assortment case one ear clamps	1





100x 0,75mm² 100x 1mm² 100x 1,5mm² 100x 2,5mm²

100x 4mm² 100x 6mm² 100x 10mm²

100x 19 x 19mm 100x 2,5 x 100mm 100x 0,75mm²
100x 2,5 x 160mm 100x 1mm²
100x 3,6 x 200mm 100x 1,5mm²
100x 2,5mm²
100x 4mm²
100x 6mm²
100x 10mm²

1x 800096

10x 2,5 - 6,0mm²

10x 6,0 - 8,5mm²

fig.	GEV No.	description	min.order quantity
5	402963	assortment case wire end ferrules	1



100x 2,8 x 0,8mm 0,5 - 1,5mm² 100x 4,8 x 0,8mm 1,5 - 2,5mm² 100x 6,3 x 0,8mm 1,5 - 2,5mm²

100x 4,8 x 0,8mm 1,5 - 2,5mm² 100x 6,3 x 0,8mm 1,5 - 2,5mm² 100x 6,3 x 0,8mm 1,5 - 2,5mm²

100 x 1,0 x 2,5mm² 100 x 2,5 x 6,0mm² 100x M4/1,5 x 2,5mm²
100x M5/1,5 - 2,5mm²

100x M5/4,0 - 6,0mm² 100x 1,9 x 12mm 1,5 - 2,5mm²

100x 2,8 x 13mm 4,0 - 6,0mm²

100x M4/1,5 - 2,5mm²
100x M6/1,5 - 2,5mm²

1x 800089

fig.	GEV No.	description	min.order quantity
6	402851	assortment case insulated terminals	1





100x F6,3
0,5 – 1,5mm²

100x F6,3
1,0 – 2,5mm²

100x F6,3
2,5 – 6mm²

100x F6,3
1,0 – 2,5mm²

100x M4
0,5 – 1,0mm²

100x M4
1,0 – 2,5mm²

100x M5
1,0 – 2,5mm²

100x M6
1,0 – 2,5mm²

20x F6,3

5x 2,5mm²
max 32A
max 250V

10x 2,5mm²
max 10A
max 250V

10x 2,5mm²
max 10A
max 250V

5x 2,5mm²
max 10A
max 250V

10x 4mm²
max 20A
max 450V

5x 6mm²
max 30A
max 450V

1x 800088

5x 10mm²
max 30A
max 450V

5x 10mm²
max 30A
max 450V

fig.	GEV No.	description	min.order quantity
7	402865	assortment case uninsulated terminals and porcelain clamp	1



2x ø 6mm
230V

2x ø 6mm
230V

2x ø 6mm
230V

2x ø 6mm
230V

5x ø 10mm
230V

5x ø 10mm
230V

5x ø 10mm
230V

5x ø 10mm
230V

5x ø 10mm
400V

5x ø 10mm
400V

5x ø 10mm
400V

5x ø 10mm
400V

5x ø 12mm
230V

5x ø 12mm
230V

5x ø 12mm
230V

5x ø 12mm
230V

5x ø 13mm
230V

5x ø 13mm
230V

5x ø 13mm
230V

5x ø 13mm
230V

fig.	GEV No.	description	min.order quantity
8	402919	assortment case indicator lights size 6-16mm	1

Find the complete and up-to-date range of products in the GEV Webshop

31



t=1,78

Ø (mm)
20x 2,90
20x 4,48
20x 6,07
20x 7,66
20x 9,25
20x 12,42

t=2,62

Ø (mm)
13x 9,19
13x 10,78
13x 12,37
13x 13,95
13x 15,54
13x 17,13
13x 18,72
13x 20,29
13x 21,89

t=3,53

Ø (mm)
10x 18,64
10x 20,22
10x 21,82
10x 23,40
10x 24,99
10x 26,58
10x 28,17
10x 29,75
10x 31,34
10x 32,92
10x 34,52
10x 36,10
10x 37,69
10x 40,87
10x 44,04
10x 47,22
10x 50,40



9

fig.	GEV No.	description	min.order quantity
9	401015	assortment case o-ring inch sizes 407-piece EPDM incl. service box	1
9	403086	assortment case o-ring inch sizes 407-piece silicone incl. service box	1
9	402912	assortment case o-ring inch sizes 407-piece Viton incl. service box	1



t=2,00

Ø (mm)
16x 3,00
16x 4,00
16x 5,00
16x 6,00
16x 7,00
16x 8,00
16x 10,00

t=2,50

Ø (mm)
13x 10,00
13x 11,00
13x 12,00
13x 14,00
13x 16,00
13x 17,00
13x 19,00

t=3,00

Ø (mm)
12x 19,00
12x 20,00
12x 22,00
12x 24,00
12x 25,00
12x 27,00
12x 28,00
12x 30,00
12x 32,00
12x 33,00
12x 35,00
12x 36,00
12x 38,00

t=4,00

Ø (mm)
9x 38,00
9x 41,00
9x 44,00



10

fig.	GEV No.	description	min.order quantity
10	403580	assortment case o-ring metric sizes 386-piece EPDM incl. service box	1
10	403581	assortment case o-ring metric sizes 386-piece silicone incl. service box	1
10	403582	assortment case o-ring metric sizes 386-piece Viton incl. service box	1

cable ties



fig.	GEV No.	W (mm)	L (mm)	colour	Qty (pcs)	min.order quantity
1	551294	2.5	98	black	100	1
1	551295	2.5	160	black	100	1
1	551296	3.6	140	black	100	1
1	551297	3.6	200	black	100	1
1	551298	3.6	290	black	100	1
1	551299	4.8	200	black	100	1
1	551300	4.8	290	black	100	1
1	551301	4.8	390	black	100	1

2



fig.	GEV No.	W (mm)	L (mm)	colour	Qty (pcs)	min.order quantity
2	550250	2.5	98	white	100	1
2	550251	2.5	160	white	100	1
2	550254	3.6	140	white	100	1
2	550252	3.6	200	white	100	1
2	550253	3.6	290	white	100	1
2	551291	4.8	200	white	100	1
2	551292	4.8	290	white	100	1
2	551293	4.8	390	white	100	1



descalers



1

fig.	GEV No.	description	min.order quantity
1	802092	descaler ASCOR SOLF content 1kg for dishwashers and washing machines	1

detergents for coffee machines



1



2





3

fig.	GEV No.	product name	approval	content	version	min.order quantity
1	802088	ASCOR Express	-	100g	100 tablets of 1g	1
2	802087	ASCOR Express	-	150g	60 tablets of 2.5g	1
3	802085	ASCOR Express	NSF	900g	can	1



Service points

Our new spare part catalogues

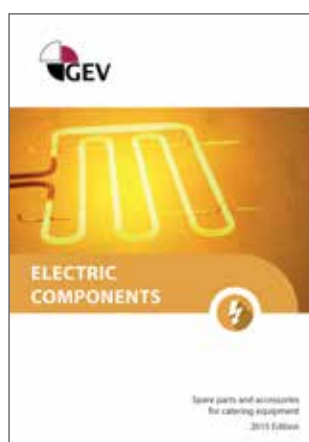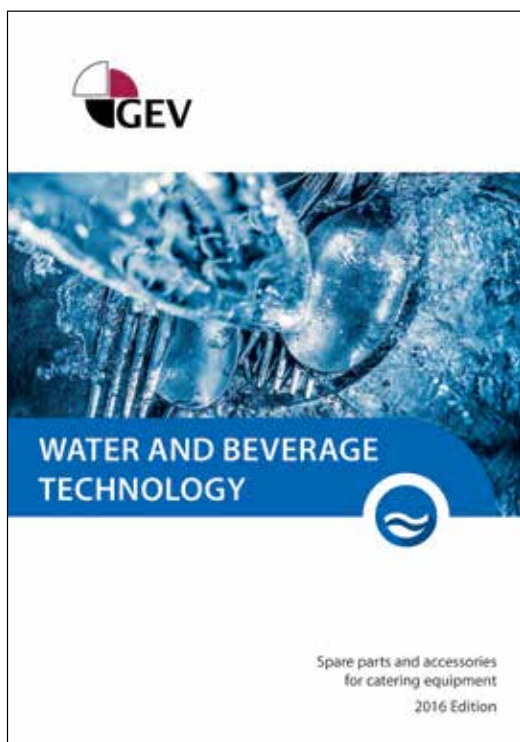

GEV own WRAS approved pre-rinse units and water taps

WRAS
APPROVED
PRODUCT



GEV App – Your mobile portal to the GEV Webshop




Android

**Download
now**



iPhone
iPad

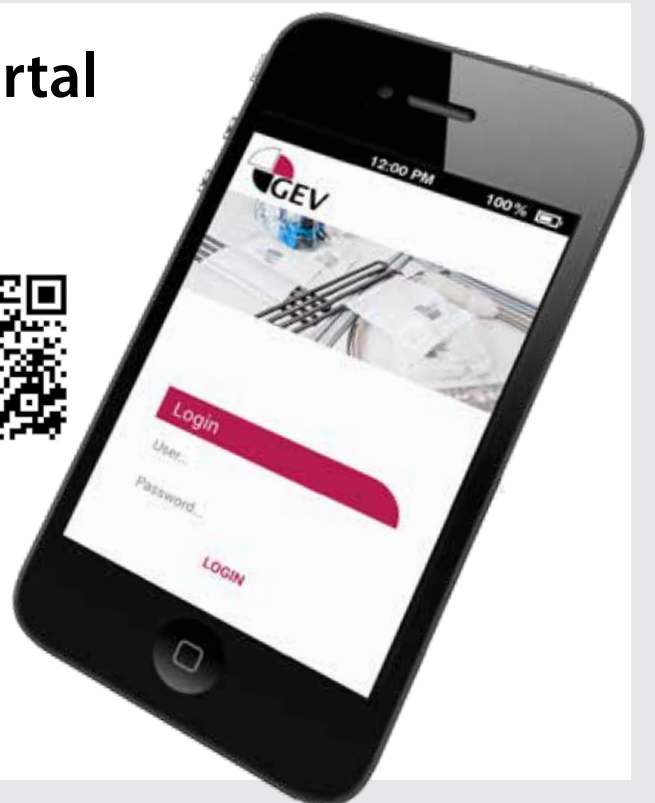

 Covering 500 brands

 Quality genuine and replacement parts

 More than 70,000 lines in stock



GEV Webshop with many new features



- 🔍 Create Favourites
- 🔍 Sign in with email address and usual password
- 🔍 Easy-order – place several items in your basket at the same time
- 🔍 Fast search – no login required

www.gev-online.co.uk
www.gev-online.com