



Spare Parts for Ovens & Combi Ovens



Spare parts suitable for

LOTUS

2018

Find the complete and up-to-date range of products in our GEV Webshop



heating elements

heating elements for convection



1

GEV No.	415117	Ref. No.	537010500
description	heating element 2500W 220V heating circuits 1 ID ø 175mm ED ø 195mm L 245mm H 55mm L1 50mm W1 30mm H1 25mm H2 10mm flange length 70mm flange width 22mm hole distance 56mm connection male faston 6.3mm horizontal tube ø 6.5mm convection heating element hole ø 5mm rectangular flange		
spare parts for	415117		
	GEV No.	510368	Ref. No. —
	gasket L 70mm W 23.5mm hole ø 5mm hole distance 56mm FIBER thickness 2mm for heating element		
accessories for	415117		
	GEV No.	510426	Ref. No. —
	gasket L 72mm W 20mm hole distance 56mm silicone thickness 2mm for heating element		



1

GEV No.	418019	Ref. No.	C3616-00
description	heating element 3900W 230V heating circuits 3 ID ø 206mm ED ø 218mm L 275mm H 40mm L1 48mm W1 104mm H1 10mm H2 24mm flange length 142mm flange width 25mm hole distance 62.5mm connection M4 connection length 62mm tube ø 6mm convection heating element hole ø 6.5mm rectangular flange		



1

GEV No.	418020	Ref. No.	RRC3090-00
description	heating element 7800W 230V heating circuits 3 ID ø 264mm ED ø 277mm L 315mm H 100mm L1 35mm W1 101mm H1 29mm H2 67mm flange length 142mm flange width 23mm hole distance 63mm connection M4 connection length 75mm tube ø 6.3mm convection heating element mounting thread M4 rectangular flange		




1

GEV No.	418905	Ref. No.	C9013-00 LC-002
description	heating element 8000W 230V heating circuits 3 ID ø 302mm ED ø 319mm L 370mm H 60mm L1 54mm W1 104mm H1 22mm H2 38mm flange length 142mm flange width 25mm hole distance 63mm connection M4 connection length 58mm tube ø 8.5mm convection heating element		

accessories

sealing washers

O-rings



1

GEV No.	510408	Ref. No.	10500100
description	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs		

energy regulators

EGO

1-circuit



1

GEV No.	380015	Ref. No.	07931 537013300 537020100 C2192-00
description	energy regulator 230V 13A single-circuit turn direction right shaft ø 6x4.6mm shaft L 23mm mounting thread M4 power release 6-100% no. 50.57021.010		
For models:	CFC4-8ET, CFC-62EM, CFC-62ET, CFMC4-66ET, CWK-74ET, CWK-78ET, CWK-94ET, CWK-98ET, CWKT-64ET, CWKT-68ET, CWKT-74ET, CWKT-78ET, CWKT-94ET, CWKT-98ET, FTC-4EM, FTC-4EMX, FTC-61EM, FTC-61ET, FTC-62EM, FTC-62ET, FTC-6EM, FTC-6EMX, FTC-6ET, FTC-74ET, FTC-78ET, FTC-8EMX, FTC-8ET, FTC-94ET, FTC-98ET, FTCD-64EM, FTCD-66ET, FTCT-64ET, FTCT-66ET, FTCT-74ET, FTCT-78ET, FTCT-94ET, FTCT-98ET, PCC-4EM, PCC-4EMX, PCC-4ET, PCC-61EM, PCC-62EM, PCC-62ET, PCC-6EM, PCC-6EMX, PCC-6ET, PCC-8EMX, PCC-8ET, PCC-CT-63ET, SA-400EM...(Other models you can see in the webshop)		


thermostats

control and safety thermostats


EGO

control thermostats

55.10/19_series



GEV No.	375354	Ref. No.	537019101
description	thermostat t.max. 270°C temperature range 50-270°C 1-pole 1NO 16A probe ø 3mm probe L 219mm capillary pipe 900mm capillary pipe isolated 900mm gland nut shaft ø 6x4.6mm shaft L 23mm shaft position upper rotation 270°		



GEV No.	375247	Ref. No.	TERMO001
description	thermostat t.max. 500°C temperature range 75-500°C 1-pole 1NO 16A probe ø 4mm probe L 228mm capillary pipe 900mm capillary pipe isolatedmm gland nut shaft ø 6x4.6mm shaft L 23mm shaft position upper rotation 270°		



GEV No.	375231	Ref. No.	537001500
description	thermostat t.max. 90°C temperature range 30-90°C 1-pole 1NO 16A probe ø 6mm probe L 130mm capillary pipe 900mm capillary pipe isolated 600mm gland nut M9x1 shaft L 18mm shaft position upper rotation 270°		
For models:	BM-10EM, BM-4EM, BM-61EM, BM-62EM, BM-62ET, BM-6EM, BM-74EM, BM-74ET, BM-78EM, BM-78ET, BM-8EM, BM-94EM, BM-98EM, BMD-64EM, BMD-84EM, BMT-63EM, BMT-64EM, BMT-66EM, BMT-74EM, BMT-78EM, BMT-94EM, BMT-98EM, BS-4EM, BS-4EMX, BS-61EM, BS-62EM, BS-74EM, BS-94EM, BSD-64EM, BST-64EM, BST-74EM, BST-94EM, CP-61EM, CP-62ET, MP-62, MP-62EM, SV-11, SV-113, SV-12, SV-123, SV-13, SV-23		

55.13_series




GEV No.	375954	Ref. No.	C2218-00 RRC2218-00
description	thermostat t.max. 109°C 1-pole 1CO 16A probe ø 3.03mm probe L 198mm capillary pipe 900mm capillary pipe isolated 610mm gland nut M9x1 shaft ømm shaft Lmm shaft position° shaft position rotation°		
For models:	RDA-5E, RDA-5EM		



GEV No.	375505	Ref. No.	537006100
description	thermostat t.max. 320°C temperature range 50-320°C 1-pole 1NO 16A probe ø 3mm probe L 160mm capillary pipe 870mm capillary pipe isolatedmm gland nut shaft ø 6x4.6mm shaft L 23mm shaft position upper rotation 270°		
For models:	CF-10EM, CF-10EM-6, CF-10EM-A, CF-10ET, CF-10ET-6, CF-10ET-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF4-8ETS, CF4-GEMS, CF-62EM, CF-62EM-A, CF-62ET, CF-62ET-A, CF-62GEM, CF-62GEM-A, CF-8EM, CF-8EM-A, CF-8ET, CF-8ET-A, CF-8GEM, CF-8GEM-A, CFC-62EM, CFC-62ET		

55.34_series




GEV No.	375143	Ref. No.	537012300
description	thermostat t.max. 110°C temperature range 32-110°C 3-pole 3NO 16A probe ø 6mm probe L 138mm capillary pipe 1480mm capillary pipe isolated 1100mm gland nut M9x1 shaft ø 6x4.6mm shaft L 23mm shaft position upper rotation 270°		
For models:	BM-10EMX, BM-4EMX, BM-6EMX, BM-8EMX, CP-4ET, CP-4ETX, CP-62ET, CP-6ET, CP-6ETX, CP-74ET, CP-74ETX, CP-78ET, CP-78ETX, CP-94ET, CP-94ETX, CP-98ET, CP-98ETX, CPD-64ET		



GEV No.	375412	Ref. No.	537013500
description	thermostat t.max. 320°C temperature range 50-320°C 3-pole 3NO 16A probe ø 3.1mm probe L 226mm capillary pipe 1480mm capillary pipe isolated 1400mm gland nut shaft ø 6x4.6mm shaft L 23mm shaft position upper rotation 318°		
For models:	FTC-4EM, FTC-4EMX, FTC-4ET, FTC-61EM, FTC-61ET, FTC-62EM, FTC-62ET, FTC-6EM, FTC-6EMX, FTC-6ET, FTC-8EMX, FTC-8ET		


safety thermostats

55.14_ series



GEV No.	375610	Ref. No.	C2198-00
description	safety thermostat switch-off temp. 340°C 1-pole 16A probe ø 3.03mm probe L 144mm capillary pipe 880mm capillary pipe isolated 750mm gland nut M9x1 probe		


55.32_ series



GEV No.	390181	Ref. No.	537012700 537012800
description	safety thermostat switch-off temp. 420°C 3-pole 20A probe ø 3.9mm probe L 306mm capillary pipe 870mm capillary pipe isolated 850mm gland nut probe SS		
For models:	BR-62ET, BR-6ET, BR-6ETX, BRF-64ET, BRF-74ET, BRF-78ET, BRF-94ET, BRF-98ET, BRFD-64ET, BRT-66ET, BRT-66ETX, CF4-78ET, CF4-78ETX, CF4-78GE, CF4-78GPE, CF4-98ET, CF4-98ETX, CF4-98GE, CF6-712ET, CF6-712ETV, CF6-712ETVX, CF6-712ETX, CF6-712GEV, CF6-712GPE, CF6-712GPEV, CF6-912ET, CF6-912ETV, CF6-912ETVX, CF6-912GE, CF6-912GEV, CF-712GE, CF-712GPE, CF8-916ET, CF8-916ETV, CF8-916GE, CF8-916GEV, CFC4-78ET, CFC4-78ETX, CFC4-98ET, CFQ4-78ET, CFQ4-78ETX, CFQ4-98ET, CFQ4-98ETX, CFQ6-712ET, CFQ6-712ETV, CFQ6-712ETVX, CFQ6-712ETX, CFQ6-912ET, CFQ6-912ETV, CFQ6-912ETVX...(Other models you can see in the webshop)		

CAEM

control thermostats



GEV No.	375609	Ref. No.	C2185-00
description	thermostat t.max. 90°C temperature range 30-90°C 1-pole 1CO 16A probe ø 6mm probe L 95mm capillary pipe 1600mm capillary pipe isolated 1550mm shaft ø 6x4.6mm rotation 270°		

accessories

gland nut accessories

ducts



GEV No.	550335	Ref. No.	533008400
description	gland duct ET M14x1 IT M9x1 chrome-plated brass		
For models:	BM-10EM, BM-4EM, BM-61EM, BM-62EM, BM-6EM, BM-74EM, BM-74ET, BM-78EM, BM-78ET, BM-8EM, BS-4EM, BS-61EM, BS-62EM, BS-74EM, BS-94EM, BSD-64EM, BST-64EM, BST-74EM, BST-94EM, FP-62ET, FP-62ETL, FP-6ET, FQ-4EM, FQ-4ET, FQ-4ETX, FQ-61EM, FQ-61ET, FQ-62EM, FQ-62ET, FQ-6EM, FQ-6ET, FQ-6ETX, MP-62, MP-62EM, SV-11, SV-113, SV-12, SV-123, SV-13, SV-23		



GEV No.	100820	Ref. No.	533018400
description	gland duct ET M14x1.5 IT M10x0.75 probe ø max. 6.5mm WS 22		

gaskets



GEV No.	550982	Ref. No.	536005100
description	gasket graphite ø 7.5mm L 7mm Qty 1 pcs for gland nut		
For models:	BM-10EM, BM-10EMX, BM-4EM, BM-4EMX, BM-4G, BM-61EM, BM-61GF, BM-62EM, BM-62ET, BM-62GF, BM-6EM, BM-6EMX, BM-6G, BM-74EM, BM-74ET, BM-74G, BM-78EM, BM-78ET, BM-78G, BM-8EM, BM-8EMX, BM-8G, BM-94G, BM-98G, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, BS-4EM, BS-4EMX, BS-61EM, BS-62EM, BS-74EM, BSD-64EM, CP-6G, F11-54G, F13-64G, F13-74G, F13T-74G, F13T-94G, F18-74G, F18-94G, F2-13-78G, F2-13T-78G, F2-13T-98G, F2-18-78G, F2-18-98G, F2-25-98G...(Other models you can see in the webshop)		

bolts with slot

			
1			
GEV No.	520243	Ref. No.	533008600
description	bolt with slot thread M9x1 Qty 10 pcs nickel-plated brass		
For models:	BM-74EM, BM-74ET, BM-78EM, BM-78ET, BS-74EM, BSD-64EM, CP-6G, F11-54G, F13-64G, F13-74G, F13T-74G, F13T-94G, F18-74G, F18-94G, F2-13-78G, F2-13T-78G, F2-13T-98G, F2-18-78G, F2-18-98G, F2-25-98G, F25-94G, F2-8-74G, F2-8-94G, F2-8T-66G, F2-8T-74G, F2-8T-94G, F45-78G, F8T-63G, FP-6G, FQ-4G, FQ-6G, FQM-4G, SV-11, SV-113, SV-12, SV-123, SV-13, SV-23		
accessories for	520243		
	GEV No.	510591	Ref. No. —
	washer with slot ED ø 8.8mm slit width 1.2mm Qty 10		
	GEV No.	510592	Ref. No. —
	gasket ø 8x8.7mm Qty 10 pcs slotted silicone		

connecting bows

			
1			
GEV No.	550060	Ref. No.	537001200
description	connecting bow long for thermostat Qty 1 pcs		
For models:	BM-10EM, BM-10EMX, BM-4EM, BM-4EMX, BM-61EM, BM-62EM, BM-62ET, BM-6EM, BM-6EMX, BM-74EM, BM-74ET, BM-78EM, BM-78ET, BM-8EM, BM-8EMX, BM-94EM, BM-98EM, BMD-64EM, BMD-84EM, BMT-63EM, BMT-64EM, BMT-66EM, BMT-74EM, BMT-78EM, BMT-94EM, BMT-98EM, BR-62ET, BR-6ET, BR-6ETX, BRF-64ET, BRF-74ET, BRF-78ET, BRF-94ET, BRF-98ET, BRFD-64ET, BRT-66ET, BRT-66ETX, BS-4EM, BS-4EMX, BS-61EM, BS-62EM, BS-74EM, BS-94EM, BSD-64EM, BST-64EM, BST-74EM, BST-94EM, CF4-78ET, CF4-78GE, CF4-98ET...(Other models you can see in the webshop)		

switches and momentary switches
rocker/momentary rocker switches
30x22mm

			
1			
GEV No.	345188	Ref. No.	537015500
description	rocker switch mounting measurements 30x22mm red 2NO 250V 16A illuminated lighting connection male faston 6.3mm ambient temperature max. 150°C protection IP40		
For models:	CF-10EM, CF-10EM-6, CF-10EM-A, CF-10ET, CF-10ET-6, CF-10ET-A, CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF4-8ETS, CF4-8G, CF4-8GEM, CF4-8GEM6-A, CF-8EM, CF-8EM-A, CF-8ET, CF-8ET-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF		

blank

			
1			
GEV No.	345982	Ref. No.	537001700
description	rocker switch mounting measurements 30x22mm green 2CO 250V 16A illuminated connection male faston 6.3mm ambient temperature max. 125/55°C protection IP65 with cover cap		
For models:	BS-74EM, BS-94EM, BSD-64EM, BST-64EM, BST-74EM, BST-94EM, CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GF, CF4-68G, CF4-8G, CF6-610G, CF-8G-A, CF-8GF, IP-EM, K-10, K-10S, K-12, K-12S, K-14, K-14S, K-15, K-15S, K-16, K-16S, K-18, K-18S, K-20, K-20S, K-22, K-22S, K-24, K-24S, K-26, K-26S, K-28, K-28S, K-30, K-30S, K-6, K-6S, K-8, K-8S, K-9, K-9S, KE-10, KE-10S, KE-12, KE-12S...(Other models you can see in the webshop)		
accessories for	345982		
	GEV No.	301036	Ref. No. —
	protective cover internal size 30x22mm for rocker switch mounting measurementsmm		

push/momentary push switches
ø25mm

			
1			
GEV No.	346094	Ref. No.	C8252-00
description	push switch mounting ø 25mm orange 2NO/indicator light 250V 16A with rubber collar connection male faston 6.3mm ambient temperature max. 85°C protection IP65		

microswitches
lever actuated

			
1			
GEV No.	346861	Ref. No.	814490182
description	microswitch with double lever 250V 16A 2CO connection male faston 6.3mm L 82mm ambient temperature max. 125°C mounting distance 22mm type AH2AF actuating force: 80g		

			
1			
GEV No.	345044	Ref. No.	40100007
description	microswitch with lever 250V 16A 1CO connection male faston 6.3mm ambient temperature max. 85°C mounting distance 25mm type C99ZP3 actuating force: 25g lever length 71mm		



pin-plunger actuated

M10



1

GEV No.	345032	Ref. No.	537011500
description	microswitch with plunger thread M10x1 thread L 12mm 250V 16A 1CO connection male faston 6.3mm stroke 7mm mounting distance 22mm L 28mm ambient temperature max. 125°C type SP9603 actuating force: 180g		
For models:	F10D-64ET, F10D-64ETX, F10T-63EM, F10T-63ET, F10T-63ETX, F13-64EM, F13-64ET, F13-74ET, F13-74ETX, F13T-74E, F13T-74ET, F13T-74ETX, F18-74ET, F18-74ETX, F18-94ET, F18-94ETX, F18D-64ET, F2-10D-66ET, F2-10D-66ETX, F2-10T-66EM, F2-10T-66ETX, F2-10T-66ETX, F2-13-78ET, F2-13-78ETX, F2-13-98ET, F2-13T-78E, F2-13T-78ETX, F2-18-74ET, F2-18-74ETX, F2-18-78ET, F2-18-78ETX, F2-18-98ET, F2-18-98ETX, F2-25-98ET, F2-25-98ETX, F25-94ET, F25-94ETX, F2-8-74ET, F2-8-94ET, F2-8D-64ET, F2-8T-74ET, F2-8T-74ETX, F2-8T-94ET, F45-78ET, FP-62ET, FP-62ETL, FP-6ET, FQ-4EM, FQ-4ET... (Other models you can see in the webshop)		

cam switches

7-position



1

GEV No.	300025	Ref. No.	537000300
description	cam switch 7 operating positions 1NO/2CO sequence 0-1-2-3-4-5-6 16A shaft ø 6x4.6mm shaft L 23mm connection screw 7-position ceramic		
For models:	CF-10EM, CF-10EM-6, CF-10EM-A, CF-10ET, CF-10ET-6, CF-10ET-A, CF4-68ET, CF4-68ETX, CF4-78ET, CF4-78ETX, CF4-8ET, CF4-8ETS, CF-62EM, CF-62EM-A, CF-62ET, CF-62ET-A, CF6-610ET, CF6-610ETX, CF6-712ET, CF6-712ETV, CF6-712ETVX, CF6-712ETX, CF-8EM, CF-8EM-A, CF-8ET, CF-8ET-A, CFM-10EM, CFM-10EM-6, CFM-10EM-A, CFM-10ET, CFM-10ET-6, CFM-10ET-A, CFM4-66ET, CFM4-68ET, CFM6-610ET, CFM-8EM, CFM-8EM-A, CFM-8ET, CFM-8ET-A, CFQ4-78ET, CFQ4-78ETX, CFQ6-712ET, CFQ6-712ETV, CFQ6-712ETVX, CFQ6-712ETX, CFV4-78ET, CFV6-712ETV, CFVQ4-78ET, CFVQ6-712ETV, PC-10ET... (Other models you can see in the webshop)		

accessories for	300025
	GEV No. 112172 Ref. No. — knob universal ø 70mm black without adaptor/dial plate
	GEV No. 112213 Ref. No. — knob dial plate silver switch 7-position t.max.°C°C ED ø 63mm ID ø 45.5mm
	GEV No. 112311 Ref. No. — knob adapter shaft ø 6x4.6mm L 0mm with spring

SWITCHES AND MOMENTARY SWITCHES LOTUS



1

GEV No.	300106	Ref. No.	537027700
description	cam switch 7 operating positions 1NO/2CO sequence 0-1-2-3-4-5-6 32A shaft ø 6x4.6mm shaft L 23mm connection screw 7-position shaft flat upper		
For models:	CF4-98ET, CF4-98ETX, CF6-912ET, CF6-912ETV, CF6-912ETVX, CF8-916ET, CF8-916ETV, CFQ4-98ET, CFQ4-98ETX, CFQ6-912ET, CFQ6-912ETV, CFQ6-912ETVX, CFQ8-916ET, CFQ8-916ETV, CFQ9-916ET, CFV4-98ET, CFV6-912ET, CFV6-912ETV, CFVQ4-98ET, CFVQ6-912ET, CFVQ6-912ETV, PC-912ET, PC-912ETX, PC-916ET, PC-916ETX, PC-94ET, PC-94ETX, PC-98ET, PC-98ETX, PCQ-912ET, PCQ-916ET, PCQ-94ET, PCQ-98ET, PCQD-84ET, PCQD-88ET, PCQT-912ET, PCQT-916ET, PCQT-94ET, PCQT-94ETX, PCQT-98ET, PCQT-98ETX, PCT-912ET, PCT-912ETX, PCT-916ET, PCT-916ETX, PCT-94ET, PCT-94ETX, PCT-98ET, PCT-98ETX		

5 operating positions



1

GEV No.	301297	Ref. No.	C8160-00
description	cam switch 5 operating positions 1-0-2-3-4 sequence 8NO 16A shaft ø 6x4.6mm shaft L 23mm connection male faston 6.3mm plastic		

10 operating positions



1

GEV No.	301205	Ref. No.	000312002 537019201
description	cam switch 10 operating positions 5NO/1CO sequence 0-1-2-3-4-5-6-7-8-9 16A shaft ø 6x4.6mm shaft L 23mm connection male faston 6.3mm ceramic		
For models:	CF4-8ET, CF4-8GEM, CF-62EM, CF-62EM-A, CF-62ET, CF-62ET-A, CF-62GEM, CF-62GEM-A, CFC4-8ET, CFC-62EM, CFC-62ET, CFM-10EM, CFM-10EM-6, CFM-10EM-A, CFM-10ET, CFM-10ET-6, CFM-10ET-A, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM2-68GEM, CFM3-612GEMV, CFM4-66ET, CFM4-66GEM, CFM4-68ET, CFM4-68GEM, CFM6-610ET, CFM6-610GEM, CFM-8EM, CFM-8EM-A, CFM-8ET, CFM-8ET-A, CFM-8GEM, CFM-8GEM-A, CFMC4-66ET, MFM-610EM, MFM-68EM, TPFM4-610GEM		

operation switches



1

GEV No.	300080	Ref. No.	40100006 537000200
description	cam switch 2 operating positions 4NO 16A sequence 0-1 shaft $\varnothing$ 6x4.6mm shaft L 23mm connection screw operation switch ceramic ambient temperature max. 150°C		
For models:	BM-10EMX, BM-4EMX, BM-61EM, BM-62EM, BM-62ET, BM-6EMX, BM-8EMX, BR-62ET, BR-6ET, BR-6ETX, BRF-64ET, BRF-74ET, BRF-78ET, BRF-94ET, BRF-98ET, BRFD-64ET, BRT-66ET, BRT-66ETX, BS-4EMX, CF4-78ET, CF4-78GE, CF4-98ET, CF4-98GE, CF6-712ET, CF6-712ETV, CF6-712ETVX, CF6-712GEV, CF6-912ETV, CF6-912ETVX, CF6-912GEV, CF-712GE, CF8-916ET, CF8-916GE, CFC4-78ET, CFC4-98ET, CFQ4-78ET, CFQ4-98ET, CFQ6-712ET, CFQ6-712ETV, CFQ6-712ETVX, CFQ6-912ETV, CFQ6-912ETVX, CFQ9-916ET, CFV4-78ET, CFV4-78GPE, CFV4-98ET, CFV4-98GE, CFV6-712ETV, CFV6-712GPEV, CFV6-912ETV...(Other models you can see in the webshop)		
accessories for	300080		
	GEV No.	551456	Ref. No. —
	 gasket for switch ED $\varnothing$ 14mm ID $\varnothing$ 2.5mm thickness 3.5mm white		



1


GEV No.	300091	Ref. No.	537000400
description	operation switch EGO 2 operating positions 2NO 16A sequence 0-1 shaft $\varnothing$ 6x4.6mm shaft L 23mm connection screw ceramic		
For models:	BM-10EM, BM-4EM, BM-61EM, BM-62EM, BM-62ET, BM-6EM, BM-74EM, BM-74ET, BM-78EM, BM-78ET, BM-8EM, BM-94EM, BM-98EM, BMD-64EM, BMD-84EM, BMT-63EM, BMT-64EM, BMT-66EM, BMT-74EM, BMT-78EM, BMT-94EM, BMT-98EM, BRF-64ET, BRF-74ET, BRF-78ET, BRF-94ET, BRF-98ET, BRFD-64ET, BRT-66ET, BRT-66ETX, BS-4EM, BS-4EMX, BS-61EM, BS-62EM, BS-74EM, BS-94EM, BSD-64EM, BST-64EM, BST-74EM, BST-94EM, CP-61EM, CP-62ET, CP-66ET, CP-74ET, CP-74ET-USA, CP-76ET, CP-78ET, CP-78ET-USA, CP-94ET, CP-94ET-USA...(Other models you can see in the webshop)		

magnetic switches

37x16mm



1

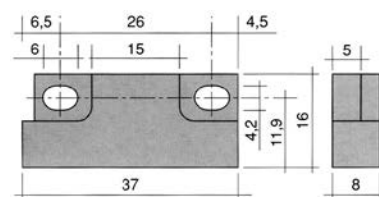


GEV No.	345600	Ref. No.	C8310-00
description	magnetic switch L 37mm W 16mm 1NO 250V 0.2A P max. 50W connection cable cable length 960mm		
accessories for	345600		
	GEV No.	519049	Ref. No. —
	 magnet $\varnothing$ mm L 63mm H 10.7mm W 18.8mm hole distance 52mm M2 hole $\varnothing$ 2mm		

65x20mm



1

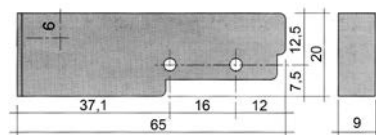


GEV No.	345116	Ref. No.	537015700
description	magnetic switch L 65mm W 20mm 1NO 250V 0.4A P max. 100W connection cable cable length 3000mm		
For models:	FE-10, FE2-10, FE-2-8, FE-8, FEM-2-6, FEM-6, FME-10, FME-15, FME-2-10, FME-2-15, FMPE-20, FMPE-25, FMPE-30, FPE-20, FPE-25		
accessories for	345116		
	GEV No.	345399	Ref. No. —
	 magnet $\varnothing$ 3.3mm L 40mm H 8mm W 13mm hole distance 30mm M3		

accessories

magnets



1

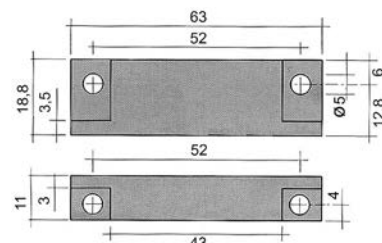

GEV No.	345336	Ref. No.	537015800
description	magnet $\varnothing$ 4.8mm L 63mm H 11mm W 18.8mm hole distance 51mm M4		
For models:	FE-10, FE2-10, FE-2-8, FE-8, FEM-2-6, FEM-6, FME-10, FME-15, FME-2-10, FME-2-15, FMPE-20, FMPE-25, FMPE-30, FPE-20, FPE-25		



encoders and potentiometers



1

GEV No.	403908	Ref. No.	MC-802
description	encoder shaft ø 6x4.6mm shaft L 10mm connection coded cable length 980mm		

lamps

indicator lights

indicator lights (complete)

ø 9mm



1

GEV No.	359136	Ref. No.	C5410-00
description	indicator light ø 9mm 230V green connection male faston 6.3mm temp.-resist. 120°C		



1

GEV No.	359137	Ref. No.	C5411-00
description	indicator light ø 9mm 230V yellow connection male faston 6.3mm temp.-resist. 120°C with lens		

ø 10mm

with plug-in socket



1

GEV No.	359036	Ref. No.	537014100 537017600
description	indicator light ø 10mm clear 230V connection male faston 6.3mm Qty 1 pcs		
For models:	BM-10EM, BM-10EMX, BM-4EM, BM-4EMX, BM-61EM, BM-62EM, BM-62ET, BM-6EM, BM-6EMX, BM-74EM, BM-74ET, BM-78EM, BM-78ET, BM-8EM, BM-8EMX, BM-94EM, BM-98EM, BMD-64EM, BMD-84EM, BMT-63EM, BMT-64EM, BMT-66EM, BMT-74EM, BMT-78EM, BMT-94EM, BMT-98EM, BR-62ET, BR-6ET, BR-6ETX, BR-64ET, BR-74ET, BR-78ET, BR-94ET, BR-98ET, BRFD-64ET, BRT-66ET, BRT-66ETX, BS-4EM, BS-4EMX, BS-61EM, BS-62EM, BS-74EM, BS-94EM, BSD-64EM, BST-64EM, BST-74EM, BST-94EM, CF-10EM, CF-10EM-6, CF-10EM-A...(Other models you can see in the webshop)		



1

GEV No.	359139	Ref. No.	537014200 537017500
description	indicator light ø 10mm green 230V connection male faston 6.3mm Qty 1 pcs		
For models:	BM-10EM, BM-10EMX, BM-4EM, BM-4EMX, BM-61EM, BM-62EM, BM-62ET, BM-6EM, BM-6EMX, BM-74EM, BM-74ET, BM-78EM, BM-78ET, BM-8EM, BM-8EMX, BM-94EM, BM-98EM, BMD-64EM, BMD-84EM, BMT-63EM, BMT-64EM, BMT-66EM, BMT-74EM, BMT-78EM, BMT-94EM, BMT-98EM, BR-62ET, BR-6ET, BR-6ETX, BR-64ET, BR-74ET, BR-78ET, BR-94ET, BR-98ET, BRFD-64ET, BRT-66ET, BRT-66ETX, BS-4EM, BS-4EMX, BS-61EM, BS-62EM, BS-74EM, BS-94EM, BSD-64EM, BST-64EM, BST-74EM, BST-94EM, CF-10EM, CF-10EM-6, CF-10EM-A...(Other models you can see in the webshop)		



1

GEV No.	359140	Ref. No.	6E00056TV
description	indicator light ø 10mm yellow 230V connection male faston 6.3mm Qty 1 pcs		

ø 12mm

with screw socket



1

GEV No.	359027	Ref. No.	C2205-00
description	indicator light ø 12mm 250V green connection male faston 6.3mm		



1

GEV No.	359291	Ref. No.	40200152
description	indicator light ø 12mm 400V green connection male faston 6.3mm		



1

GEV No.	359290	Ref. No.	40200150
description	indicator light ø 12mm 400V yellow connection male faston 6.3mm		

screw-on/push-on fit

light bulbs

for ovens



1

GEV No.	359610	Ref. No.	537005400
description	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 47mm lens L 20mm for oven lamp type Philips		
For models:	CF-10EM, CF-10EM-6, CF-10EM-A, CF-10ET, CF-10ET-6, CF-10ET-A, CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF4-68ET, CF4-68G, CF4-68GEM, CF4-8ET, CF4-8ETS, CF4-8G, CF4-8GEM, CF4-GEMS, CF-62EM, CF-62EM-A, CF-62ET, CF-62ET-A, CF-62GEM, CF-62GEM-A, CF6-610ET, CF6-610G, CF6-610GEM, CF-8EM, CF-8EM-A, CF-8ET, CF-8ET-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFC4-8ET, CFC-62EM, CFC-62ET, CFM-10EM, CFM-10EM-6, CFM-10EM-A, CFM-10ET, CFM-10ET-6, CFM-10ET-A, CFM-10GEM, CFM-10GEM-6...(Other models you can see in the webshop)		



2

GEV No.	359612	Ref. No.	C2104-03 C6073E-00 LAMP A001
description	light bulb t.max. 300°C socket E14 25W 230V ø 25mm L 56mm lens L 30mm for oven lamp type Philips		

halogen lamp

for socket G4 / G6.35 / G9



1

GEV No.	359074	Ref. No.	C5252-00
description	halogen lamp socket G6.35 12V 35W temp.-resist. 500°C		

oven lamps

universal oven lamps

mounting diameter 35.5mm



1

GEV No.	359718	Ref. No.	537007900
description	oven lamp mounting ø 35.5mm 230V 15W socket E14 temp.-resist. 300°C connection male faston 6.3mm hard glas		
For models:	CF-10EM, CF-10EM-6, CF-10EM-A, CF-10ET, CF-10ET-6, CF-10ET-A, CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF4-68ET, CF4-68G, CF4-68GEM, CF4-8ET, CF4-8ETS, CF4-8G, CF4-8GEM, CF4-GEMS, CF-62EM, CF-62EM-A, CF-62ET, CF-62ET-A, CF-62GEM, CF-62GEM-A, CF6-610ET, CF6-610G, CF6-610GEM, CF-8EM, CF-8EM-A, CF-8ET, CF-8ET-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFC4-8ET, CFC-62EM, CFC-62ET, CFM-10EM, CFM-10EM-6, CFM-10EM-A, CFM-10ET, CFM-10ET-6, CFM-10ET-A...(Other models you can see in the webshop)		
spare parts for	359718		
	GEV No.	359701	Ref. No.
			—
	lamp socket socket E14 220-230V mounting ø 35.5mm connection male faston 6.3mm 15W		

55x70mm



1

GEV No.	357159	Ref. No.	C6073B-00
description	lamp socket socket E14 mounting measurements 55x70mm connection male faston 6.3mm Qty 1 pcs		




1

GEV No.	359297	Ref. No.	C6073D-00
description	frame L 95mm W 81mm mounting distance 68/83mm thickness 6mm		
accessories for	359297		
	GEV No.	359299	Ref. No.
			C6073F-00
	gasket L 91mm W 77mm hole ø 3mm for oven lamp		



1

GEV No.	359299	Ref. No.	C6073F-00
description	gasket L 91mm W 77mm hole ø 3mm for oven lamp		

			
1			
GEV No.	359296	Ref. No.	C6073C-00
description	lamp glass L 74mm W 58mm thickness 3mm		

			
1			
GEV No.	357159	Ref. No.	C6073B-00
description	lamp socket socket E14 mounting measurements 55x70mm connection male faston 6.3mm Qty 1 pcs		

55x100mm			
			
1			
GEV No.	359698	Ref. No.	C2272-01
description	lamp socket L 100mm W 55mm socket E14 connection male faston 6.3mm		
spare parts for	359698		
	GEV No.	358119	Ref. No. —
	frame L 118mm W 72mm mounting distance 143mm for bulb socket		
	GEV No.	358122	Ref. No. —
	gasket L 112mm W 68mm silicone thickness 3mm for bulb socket		
	GEV No.	358123	Ref. No. —
	lamp glass L 112mm W 68mm		
	GEV No.	359612	Ref. No. C2104-03 C6073E-00 LAMP A001
	light bulb t.max. 300°C socket E14 25W 230V ø 25mm L 56mm lens L 30mm for oven lamp type Philips		
	GEV No.	359714	Ref. No. C2104-32
	gasket silicone L 140mm W 75mm for bulb socket		
	GEV No.	359715	Ref. No. C2104-22
	lamp glass L 110mm W 65mm thickness 5mm		
	GEV No.	359716	Ref. No. C2104-12
	frame for bulb socket		
accessories for	359698		
	GEV No.	359612	Ref. No. C2104-03 C6073E-00 LAMP A001
	light bulb t.max. 300°C socket E14 25W 230V ø 25mm L 56mm lens L 30mm for oven lamp type Philips		
	GEV No.	359938	Ref. No. —
	borosilicate glass L 115mm W 69mm		

			
1			
GEV No.	359716	Ref. No.	C2104-12
description	frame for bulb socket		

			
1			
GEV No.	359714	Ref. No.	C2104-32
description	gasket silicone L 140mm W 75mm for bulb socket		

			
1			
GEV No.	359715	Ref. No.	C2104-22
description	lamp glass L 110mm W 65mm thickness 5mm		

			
1			
GEV No.	359698	Ref. No.	C2272-01
description	lamp socket L 100mm W 55mm socket E14 connection male faston 6.3mm		
spare parts for	359698		
	GEV No.	358119	Ref. No. —
	frame L 118mm W 72mm mounting distance 143mm for bulb socket		
	GEV No.	358122	Ref. No. —
	gasket L 112mm W 68mm silicone thickness 3mm for bulb socket		
	GEV No.	358123	Ref. No. —
	lamp glass L 112mm W 68mm		
	GEV No.	359612	Ref. No. C2104-03 C6073E-00 LAMP A001
	light bulb t.max. 300°C socket E14 25W 230V ø 25mm L 56mm lens L 30mm for oven lamp type Philips		
	GEV No.	359714	Ref. No. C2104-32
	gasket silicone L 140mm W 75mm for bulb socket		
	GEV No.	359715	Ref. No. C2104-22
	lamp glass L 110mm W 65mm thickness 5mm		
	GEV No.	359716	Ref. No. C2104-12
	frame for bulb socket		

Table continues overleaf

alarm devices

buzzer boards



GEV No.	401062	Ref. No.	C5366-00
description	buzzer board 230VAC L 48mm W 45mm connection male faston 6.3mm		

contactors

ISKRA (FANAL)

power contactors



GEV No.	380213	Ref. No.	53.7.0080.00 537010100
description	power contactor resistive load 20A 230VAC (AC3/400V) 8.5A/5.5kW main contacts 3NO auxiliary contacts 1NO connection screw connection type Fanal DSL7 10 type ISKRA K07M 10		
For models:	BRF-78ET, CP-74ET, CP-74ET-USA, CP-76ET, CP-78ET, CP-78ET-USA, CPA-66ET, CPA-74ET, CPA-76ET, CPA-78ET, CPT-64EM-USA, CPT-64ET, CPT-66ET, CPT-74ET, CPT-76ET, CWK-74ET, CWK-78ET, CWK-94ET, CWK-98ET, CWKT-64ET, CWKT-68ET, CWKT-74ET, CWKT-78ET, CWKT-94ET, CWKT-98ET, F10D-64ET, F10D-64ETX, F10T-63EM, F10T-63ET, F10T-63ETX, F13-64EM, F13-64ET, F13-74ET, F13-74ETX, F13T-74E, F13T-74ET, F13T-94ET, F18-74ET, F2-10D-66ET, F2-10D-66ETX, F2-10T-66EM, F2-10T-66ET, F2-10T-66ETX, F2-13-78ET, F2-13-78ETX, F2-13-98ET, F2-13T-78E, F2-13T-78ET, F2-18-78ET, F2-8-74ET...(Other models you can see in the webshop)		

LOVATO

power contactors



GEV No.	380705	Ref. No.	LC-310
description	power contactor resistive load 20A 230VAC (AC3/400V) 9A/4kW main contacts 3NO auxiliary contacts 1NO connection screw connection type 11BG0910A230		
accessories for	380705		
	GEV No.	380057	Ref. No. —
	auxiliary contact contacts 1NO/1NC AC1 10A for contactors BG series connection screw type BGX1011		

relays

plug-in/print relays



GEV No.	381153	Ref. No.	AZ019-00
description	print relay 230VAC 2CO at 250V 8A raster size 5mm with socket		
spare parts for	381153		
	GEV No.	381168	Ref. No. —
	print relay 230VAC 2CO 2-pole at 250V 8A connection pins raster size 5mm SCHRACK manuf. no. RT424730 95.65/95.75		

probes

producer-specific probes

probes



GEV No.	378671	Ref. No.	C8138-00
description	temperature probe Pt1000 cable PTFE connection 2-wire probe ø4x60mm cable length 1.3m		

electronics

PCBs



GEV No.	401101	Ref. No.	C2560-00
description	keypad PCB L 200mm W 95mm		

solenoid valves

solenoid valves (water)

ROBERTSHAW/INVENSYS

medium temperature: 90°C 90°C 60°C

ambient temperature: 60°C 25°C 60°C

duty cycle: 40% 100% 100%



GEV No.	372025	Ref. No.	C2088-00
description	solenoid valve triple straight 230VAC inlet 3/4" outlet 11.5mm DN10 EATON (INVENSYS)		
accessories for	372025		
	GEV No.	371250	Ref. No. C1707-00
	reducer type EATON (INVENSYS) flow rate 0.25l/min pressure range 0 up to 10bar tolerance ±15/25% white		

spare parts and accessories

reducers

outlet side



GEV No.	371250	Ref. No.	C1707-00
description	reducer type EATON (INVENSYS) flow rate 0.25l/min pressure range 0 up to 10bar tolerance ±15/25% white		

RPE



GEV No.	374017	Ref. No.	C3057-00
description	solenoid valve single straight 230VAC inlet 3/4" outlet 10mm input 6l/min DN10 RPE polyamide flow regulating valve inlet white membranes NBR pressure range 0.2-10bar		

TP



GEV No.	370017	Ref. No.	537012600
description	solenoid valve single straight 230VAC inlet 3/4" outlet 11.5mm DN10 TP p max 10bar		
For models:	CP-4ET, CP-6ET		
spare parts for	370017		
	GEV No.	371013	Ref. No. —
	solenoid coil TP 230VAC 50/60Hz		

accessories for	370017		
	GEV No.	371220	Ref. No. —
	reducer TP flow rate 3l/min red tolerance ±15%		
	GEV No.	371221	Ref. No. —
	reducer TP flow rate 5.5l/min yellow tolerance ±15%		
	GEV No.	371222	Ref. No. —
	reducer TP flow rate 6l/min grey tolerance ±15%		
	GEV No.	371223	Ref. No. —
	reducer TP flow rate 10l/min white tolerance ±15%		
	GEV No.	371224	Ref. No. —
	reducer TP flow rate 12l/min bronze tolerance ±15%		
	GEV No.	371225	Ref. No. —
	reducer TP flow rate 16l/min light brown tolerance ±15%		
	GEV No.	371226	Ref. No. —
	reducer TP flow rate 20l/min red tolerance ±15%		
	GEV No.	371230	Ref. No. —
	reducer TP flow rate 0.25l/min red tolerance ±25%		
	GEV No.	371231	Ref. No. —
	reducer TP flow rate 0.35l/min violet tolerance ±25%		
	GEV No.	371232	Ref. No. —
	reducer TP flow rate 0.5l/min orange tolerance ±25%		
	GEV No.	371233	Ref. No. —
	reducer TP flow rate 0.8l/min white tolerance ±25%		
	GEV No.	371234	Ref. No. —
	reducer TP flow rate 1l/min light blue tolerance ±25%		
	GEV No.	371235	Ref. No. —
	reducer TP flow rate 1.2l/min brown tolerance ±25%		
	GEV No.	371236	Ref. No. —
	reducer TP flow rate 1.5l/min light brown tolerance ±25%		
	GEV No.	371237	Ref. No. —
	reducer TP flow rate 2.5l/min yellow tolerance ±25%		
	GEV No.	371238	Ref. No. —
	reducer TP flow rate 3.4l/min dark green tolerance ±25%		
	GEV No.	371239	Ref. No. —
	reducer TP flow rate 5l/min black tolerance ±25%		
	GEV No.	371240	Ref. No. —
	reducer TP flow rate 8l/min blue tolerance ±20%		



fans

hot air motors



1

GEV No.	550049	Ref. No.	C2029-00
description	counterflange for fan motor ED ø 60mm int. ø 1 27.3mm int. ø 2 18.5mm thickness 5.8mm brass		




1

GEV No.	511585	Ref. No.	C2027-00
description	engine shaft gasket ID ø 17mm ED ø 21.5mm thickness 3.5mm conical		




1



GEV No.	500629	Ref. No.	RRC3610-00
description	fan motor 220-240V 1 phase 50/60Hz 0.045/0.0765kW 2800/3400rpm speeds 1 L1 95mm L2 33mm L3 19mm D1 ø 8mm D2 ø 10mm 0.35A suitable capacitor 2.5µF/400V type 1048		
For models:	RDA-5E, RDA-5EM, RDE-5E, RDE-5EM, SUTA-4E, SUTA-5E		




1



GEV No.	500630	Ref. No.	C2901-00
description	fan motor 230/400V 3 phase 50Hz 0.37kW 2600rpm speeds 1 L1 175mm L2 50mm L3 28mm D1 ø 17mm D2 ø 12mm M8R IT 1.1/1.9A Cos(f) 0.75 at 50Hz 2600rpm type 1020.5450		




1



GEV No.	500631	Ref. No.	C7160-00
description	fan motor 230/400V 3 phase 50Hz 0.55kW 2800rpm speeds 1 L1 185mm L2 45mm L3 47mm D1 ø 24mm D2 ø 20mm M8L IT 2.6/1.5A Cos(f) 0.8 at 50Hz 2800rpm type 3011B4050		




1



GEV No.	601816	Ref. No.	C9011-00
description	fan motor 230V 1 phase 50Hz 0.25kW 2600rpm speeds 1 L1 90mm L2 38mm L3 24mm D1 ø 12mm D2 ø 10mm M6 1.5A Cos(f) 0.98 suitable capacitor 10µF/450V		



1




GEV No.	601721	Ref. No.	C2900-00
description	fan motor 230V 1 phase 50Hz 0.37kW 2800rpm L1 172mm L2 53mm L3 33mm D1 ø 17mm D2 ø 12mm M8x1.25 2.5A suitable capacitor 10 Cos(f) 0.95 type 1020.2350		



1

GEV No.	602179	Ref. No.	C9012-00
description	fan wheel blades 55 D1 ø 240mm D2 ø 9mm D3 ø 11mm H1 60mm H2 24mm		

			
1			
GEV No.	514257	Ref. No.	C3612-00
description	fan wheel D1 ø 164mm H1 38mm blades 36 D2 ø 8mm D3 ø 8mm H2 28mm		

			
1			
GEV No.	552008	Ref. No.	C2028-00
description	flange for fan motor ED ø 60mm int. ø 1 21.5mm int. ø 2 18.5mm thickness 4mm brass		

hot air fans

miscellaneous

1

GEV No.

601339

Ref. No.

75R0035

description

hot air fan 230V 45W L1 78mm L2 13mm L3 25mm L4 87mm fan wheel ø 150mm Medys type 30.200.CLH

1

GEV No.	601184	Ref. No.	537006800 537044700+533136500+533136600
description	hot air fan 230V L1 82mm L2 15mm L3 25mm L4 87mm fan wheel ø 150mm Emmevi type 260306X		
For models:	CF4-8ET, CF4-8GEM, CF-62EM, CF-62EM-A, CF-62ET, CF-62ET-A, CF-62GEM, CF-62GEM-A, CFC4-8ET, CFC-62EM, CFC-62ET, CFM-10EM, CFM-10EM-6, CFM-10EM-A, CFM-10ET, CFM-10ET-6, CFM-10ET-A, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM2-68GEM, CFM3-612GEMV, CFM4-66ET, CFM4-66GEM, CFM4-68ET, CFM4-68GEM, CFM6-610ET, CFM6-610GEM, CFM-8EM, CFM-8EM-A, CFM-8ET, CFM-8ET-A, CFM-8GEM, CFM-8GEM-A, CFMC4-66ET		

fuses

fine fuses

			
1			
GEV No.	358532	Ref. No.	LC-422
description	fine fuse size ø5x20mm 2A fast-acting rated 250V Qty 10 pcs		

			
1			
GEV No.	358594	Ref. No.	LC-426
description	fine fuse size ø5x20mm 0.16A slow-acting rated 250V Qty 10 pcs		



electric accessories

terminals

connection terminals with screw/faston connections



1

GEV No.	550278	Ref. No.	537007600
description	power terminal block 3-pole max. 40A max 400V connection ø6mm² / F6.3 temp.-resist. 150°C cross section 6mm²		
For models:	BM-10EM, BM-10EMX, BM-4EM, BM-4EMX, BM-61EM, BM-62EM, BM-62ET, BM-6EM, BM-6EMX, BM-74EM, BM-74ET, BM-74G, BM-78EM, BM-78ET, BM-78G, BM-8EM, BM-8EMX, BM-94EM, BM-98EM, BMT-74EM, BMT-78EM, BMT-94EM, BMT-98EM, BS-4EM, BS-4EMX, BS-61EM, BS-62EM, BS-74EM, BS-94EM, BST-74EM, BST-94EM, CF-10EM, CF-10EM-6, CF-10EM-A, CF-10ET, CF-10ET-A, CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF2-58GE, CF3-512GEV, CF4-78G, CF4-8G, CF4-8GEM, CF4-GEMS... (Other models you can see in the webshop)		



1

GEV No.	550411	Ref. No.	537007700 FX0144-00
description	power terminal block 6-pole max. 40A max 450V connection ø6mm² / F6.3 temp.-resist. 150°C cross section 6mm²		
For models:	BM-61EM, BM-62EM, BM-62ET, BR-62ET, BR-6ET, BR-6ETX, BR-74ET, BR-78ET, BR-94ET, BR-98ET, CF-10EM, CF-10EM-A, CF-10ET, CF-10ET-6, CF-10ET-A, CF4-78ET, CF4-78GE, CF4-8ET, CF4-8ETS, CF-62EM, CF-62EM-A, CF-62ET, CF-62ET-A, CF6-712ET, CF6-712ETV, CF6-712ET-VX, CF6-712GEV, CF-712GE, CF-8EM, CF-8EM-A, CF-8ET, CF-8ET-A, CFC4-78ET, CFC4-8ET, CFC-62ET, CFM-10ET, CFM-10ET-6, CFM-8ET, CFM-8ET-A, CFQ4-78ET, CFQ6-712ET, CFQ6-712ETV, CFQ6-712ETVX, CP-4ET, CP-4ETX, CP-61EM, CP-62ET, CP-6ET, CP-6ETX, CP-74ET... (Other models you can see in the webshop)		

rail-mounted terminals

miscellaneous



1

GEV No.	551453	Ref. No.	LC-420
description	rail-mounted terminal CONTA CLIP type STK2 4mm² W 38mm L 48mm max. 6.3A max 500V		

gas valves and ignition boxes

gas control valves

SIT

NOVASIT



1

GEV No.	101956	Ref. No.	531042000
description	gas valve SIT series Novasit 820 230V 50Hz gas inlet 1/2" gas outlet 1/2" thermocouple connection M9x1 pilot connection M10x1 ignition pressure regulator connection M9x1 pressure range 5-50mbar pressure regulator connection blind equiv. no. 0.820.031		
For models:	F18-94G, F2-18-98G, F2-25-98G, F25-94G, F45-78G		
spare parts for	101956		
	GEV No.	101065	Ref. No. —
magnet unit with cable L 44mm D1 ø 30mm D2 ø 20mm suitable for NOVASIT			
	GEV No.	101313	Ref. No. 537027200
solenoid coil 230V 50Hz			
accessories for	101956		
	GEV No.	100006	Ref. No. —
piezoelectric igniter suitable for ELETROSIT body plastic blowing connection ø2.4mm ø 14mm			
	GEV No.	101305	Ref. No. —
gas connection straight 1/2" flange 45x45mm ELETROSIT/V4400/4600/4605 suitable for SIT/HONEYWELL hole distance 36x36mm			
	GEV No.	101306	Ref. No. —
gas connection angled flange 45x45mm hole distance 36x36mm 1/2" ELETROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL			
	GEV No.	101307	Ref. No. 531043300
gas connection straight flange 45x45mm hole distance 36x36mm 3/4" ELETROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL			
	GEV No.	101308	Ref. No. —
gas connection angled flange 45x45mm hole distance 36x36mm 3/4" ELETROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL			
	GEV No.	101312	Ref. No. —
microswitch			
	GEV No.	101314	Ref. No. —
solenoid coil 24V 50Hz			
	GEV No.	101317	Ref. No. —
plug with cable L 1000mm suitable for NOVASIT			
	GEV No.	101318	Ref. No. 536022600
cover cap for solenoid coil suitable for NOVASIT			


accessories

			
1			
GEV No.	100905	Ref. No.	533018300
description	locking screw M10x1 for pipe ø 6mm Qty 1 pcs		

1

GEV No.	101313	Ref. No.	537027200
description	solenoid coil 230V 50Hz		
For models:	F18-94G, F2-18-98G, F2-25-98G, F25-94G, F45-78G		
accessories for	101313		
	GEV No.	550896	Ref. No. —
gasket with screw gas valves NOVASIT			

ignition parts
pilot burners
SIT
100 series

1

GEV No.	106901	Ref. No.	533091400 533091500
description	pilot burner SIT type 100 series 1 flame nozzle ø 0.2mm gas connection 6mm		
For models:	CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98G, CF4-98GE, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-912G, CF6-912GE, CF6-912GEV, CF6-912GV, CF-712GPE, CF8-916G, CF8-916GE, CF8-916GEV, CF8-916GV, CFM2-68GEM, CFM3-612GEMV, CFV4-78GPE, CFV4-98GE, CFV6-712GPEV, CFV6-912GEV, PC1T-64G, PC2T-68G, PC3-612G, PC3T-612G, PC-712GP, PC-712GP-USA, PC-716GP, PC-716GP-USA, PC-74GP, PC-74GP-USA, PC-78GP, PC-78GP-USA, PC-912G, PC-916G, PC-94G, PC-98G...(Other models you can see in the webshop)		
spare parts for	106901		
	GEV No.	100854	Ref. No. —
	pilot burner bracket double		
	GEV No.	100916	Ref. No. —
	compression spring for pilot burner Qty 1 pcs		
	GEV No.	100917	Ref. No. —
	gasket for pilot burner Qty 1 pcs aluminium ID ø 8.5mm ED ø 11mm thickness 1.2mm		
	GEV No.	100918	Ref. No. —
	screw for pilot burner		

accessories for	106901			
	GEV No.	100904	Ref. No.	—
locking screw M10x1 for pipe ø 4mm Qty 1 pcs				
	GEV No.	100905	Ref. No.	533018300
locking screw M10x1 for pipe ø 6mm Qty 1 pcs				
	GEV No.	102110	Ref. No.	—
pilot tube copper pipe ø 4mm thickness 1mm L 3000mm				
	GEV No.	102111	Ref. No.	—
pilot tube copper pipe ø 6mm thickness 1mm L 3000mm				
	GEV No.	102742	Ref. No.	—
pilot burner nozzle LPG code 25 bore ø 0.25mm Qty 1 pcs				



1

GEV No.	106906	Ref. No.	30100005 530100005
description	pilot burner SIT type 100 series 3 flames nozzle ø 0.2mm gas connection 6mm		
spare parts for	106906		
	GEV No.	100245	Ref. No. 533091000
	pilot burner nozzle LPG code 20 bore ø 0.2mm Qty 1 pcs thread M8x0.75		
	GEV No.	100855	Ref. No. —
	pilot burner bracket triple		
	GEV No.	100885	Ref. No. —
	air mixing sleeve for pilot burner Qty 1 pcs		
	GEV No.	100916	Ref. No. —
	compression spring for pilot burner Qty 1 pcs		
	GEV No.	100917	Ref. No. —
	gasket for pilot burner Qty 1 pcs aluminium ID ø 8.5mm ED ø 11mm thickness 1.2mm		
	GEV No.	100918	Ref. No. —
	screw for pilot burner		
	GEV No.	107162	Ref. No. —
	pilot burner cap SIT 3 flames Hmm Lmm Qty 1 pcs		
	GEV No.	107701	Ref. No. —
	pilot burner bottom part SIT 100 series nozzle ø 0.2mm		
accessories for	106906		
	GEV No.	100245	Ref. No. 533091000
	pilot burner nozzle LPG code 20 bore ø 0.2mm Qty 1 pcs thread M8x0.75		
	GEV No.	100246	Ref. No. 533091200
	pilot burner nozzle natural gas bore ø 0.35mm Qty 1 pcs thread M8x0.75		

Table continues overleaf



accessories for 106906				
	GEV No.	100904	Ref. No.	—
locking screw M10x1 for pipe ø 4mm Qty 1 pcs				
	GEV No.	100905	Ref. No.	533018300
locking screw M10x1 for pipe ø 6mm Qty 1 pcs				
	GEV No.	102110	Ref. No.	—
pilot tube copper pipe ø 4mm thickness 1mm L 3000mm				
	GEV No.	102111	Ref. No.	—
pilot tube copper pipe ø 6mm thickness 1mm L 3000mm				
	GEV No.	107171	Ref. No.	—
pilot burner nozzle SIT natural/liquid gas bore ø 0.25mm Qty 1 pcs				
	GEV No.	107700	Ref. No.	—
pilot burner bottom part SIT 100 series nozzle ø 0.25mm				
	GEV No.	107702	Ref. No.	—
pilot burner bottom part SIT 100 series nozzle ø 0.35mm				


accessories

pilot burner nozzles

1			
GEV No.	100245	Ref. No.	533091000
description	pilot burner nozzle LPG code 20 bore ø 0.2mm Qty 1 pcs thread M8x0.75		
For models:	CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98G, CF4-98GE, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-912G, CF6-912GE, CF6-912GEMV, CF6-912GV, CF-712GPE, CF8-916G, CF8-916GE, CF8-916GEMV, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV, CFA6-912GV, CFM2-68GEM, CFM3-612GEMV, CFV4-78GPE, CFV4-98GE, CFV6-712GPEV, CFV6-912GEV, PA-78G, PA-98G, PAF-78G, PAF-98G, PAT-78G, PAT-98G, PC1T-64G, PC2T-68G, PC3-612G, PC3T-612G, PC-712GP, PC-712GP-USA...(Other models you can see in the webshop)		

 1			
GEV No.	100246	Ref. No.	533091200
description	pilot burner nozzle natural gas bore ø 0.35mm Qty 1 pcs thread M8x0.75		
For models:	CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98G, CF4-98GE, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-912G, CF6-912GE, CF6-912GEMV, CF6-912GV, CF-712GPE, CF8-916G, CF8-916GE, CF8-916GEMV, CF8-916GV, CFA4-78G, CFA4-98G, CFA4-98GE, CFA6-712GV, CFA6-912GV, CFM2-68GEM, CFM3-612GEMV, CFV4-78GPE, CFV4-98GE, CFV6-712GPEV, CFV6-912GEMV, PA-78G, PA-98G, PAF-78G, PAF-98G, PAT-78G, PAT-98G, PC1T-64G, PC2T-68G, PC3-612G, PC3T-612G, PC-712GP, PC-712GP-USA...(Other models you can see in the webshop)		

ignition electrodes



GEV No.	100706	Ref. No.	30100054
description ignition electrode connection M4 Qty 1 pcs			

140 - 145 -150 series



GEV No.	107133	Ref. No.	533023200
description pilot burner SIT type 140 series 1 flame nozzle ømm gas connectionmm			
For models: CF4-78G, CF4-78GP, CF4-78GP-AUS, CF4-78GP-USA, CF4-98G, CF6-712G, CF6-712GP, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912G, CF6-912GV, CF8-916G, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV, CFA6-912GV, CFPB6-79G, PAF-78G, PAF-98G, TP2-712G, TP2-712GP, TP2-78GP, TP2-912G, TP2-98G, TP2T-712GP, TP2T-78GP, TP2T-912G, TP2T-98G, TP4-712GP, TP4-912G, TP4T-610G, TP4T-712GP, TP4T-912G, TP-74G, TP-78G, TP-94G, TP-98G, TPF2-712G, TPF2-712GP, TPF2-712GPE, TPF2-712GPEV, TPF2-712GPV, TPF2-712GV, TPF2-78GP, TPF2-78GPE, TPF2-912G, TPF2-912GE, TPF2-912GEV...(Other models you can see in the webshop)			
accessories for 107133			
	GEV No.	100204	Ref. No. —
pilot burner nozzle SIT LPG code 14 bore ø 0.18/0.20mm Qty 1 pcs suitable for 140 series			
	GEV No.	100205	Ref. No. 533020500
pilot burner nozzle SIT LPG code 19 bore ø 0.23/0.26mm Qty 1 pcs suitable for SIT 150 series			
	GEV No.	100206	Ref. No. —
pilot burner nozzle SIT natural gas code 36 bore ø 0.60/0.55mm Qty 1 pcs suitable for SIT 150 series			
	GEV No.	100207	Ref. No. 533020600
pilot burner nozzle SIT natural gas code 27 bore ø 0.40/0.38mm suitable for SIT 140 series			
	GEV No.	100216	Ref. No. —
pilot burner nozzle SIT natural gas code 38 bore ø 0.45mm Qty 1 pcs suitable for SIT 150 series			
	GEV No.	100701	Ref. No. —
ignition electrode connection M4 Qty 1 pcs			
	GEV No.	100897	Ref. No. —
olive for pipe ø 4mm Qty 1 pcs for pilot burner			
	GEV No.	100898	Ref. No. 533023300
olive for pipe ø 6mm Qty 1 pcs for pilot burner			

Table continues overleaf

accessories for 107133				
	GEV No.	100906	Ref. No.	533018600
screw connection thread M10x1 for ignition electrode brass Qty 1 pcs WS 10				
	GEV No.	100907	Ref. No.	—
screw connection thread M10x1 Qty 1 pcs type SEF 1 ømm for thermocouple				
	GEV No.	100908	Ref. No.	—
union screw thread M10x1 for pipe ø 4mm Qty 1 pcs				
	GEV No.	100909	Ref. No.	533018500 / VPE1 533039000
union screw thread M10x1 for pipe ø 6mm Qty 1 pcs				
	GEV No.	102110	Ref. No.	—
pilot tube copper pipe ø 4mm thickness 1mm L 3000mm				
	GEV No.	102111	Ref. No.	—
pilot tube copper pipe ø 6mm thickness 1mm L 3000mm				



1

GEV No.	107114 ¹	Ref. No.	533023400	
description	pilot burner SIT type 140 series 2 flames nozzle ømm gas connecti-onmm			
For models:	BRT-66G, CPT-64G, CPT-66G, CPT-74G, CPT-76G, FTL-54G, FTL-56G, FTL-712G, FTL-712GS, FTL-712G-USA, FTL-74G, FTL-74GS, FTL-74G-USA, FTL-76G, FTL-76GS, FTL-76G-USA, FTL-78G, FTL-78G-AUS, FTL-78GS, FTL-78G-USA, FTL-916G, FTL-94G, FTL-94GS, FTL-98G, FTL-98GS, FTLR-56G, FTLR-712G, FTLR-712GS, FTLR-712G-USA, FTLR-76G, FTLR-76GS, FTLR-76G-USA, FTLR-78G, FTLR-78G-AUS, FTLR-78GS, FTLR-78G-USA, FTLR-98G, FTLR-98GS, FTR-54G, FTR-56G, FTR-712G, FTR-712GS, FTR-712G-USA, FTR-74G, FTR-74GS, FTR-74G-USA, FTR-76G, FTR-76GS, FTR-76G-USA, FTR-78G...(Other models you can see in the webshop)			
spare parts for	107114			
	GEV No.	100907	Ref. No.	—
screw connection thread M10x1 Qty 1 pcs type SEF 1 ømm for thermocouple				
accessories for	107114			
	GEV No.	100204	Ref. No.	—
pilot burner nozzle SIT LPG code 14 bore ø 0.18/0.20mm Qty 1 pcs suitable for 140 series				
	GEV No.	100205	Ref. No.	533020500
pilot burner nozzle SIT LPG code 19 bore ø 0.23/0.26mm Qty 1 pcs suitable for SIT 150 series				
	GEV No.	100206	Ref. No.	—
pilot burner nozzle SIT natural gas code 36 bore ø 0.60/0.55mm Qty 1 pcs suitable for SIT 150 series				
	GEV No.	100207	Ref. No.	533020600
pilot burner nozzle SIT natural gas code 27 bore ø 0.40/0.38mm suitable for SIT 140 series				
	GEV No.	100216	Ref. No.	—
pilot burner nozzle SIT natural gas code 38 bore ø 0.45mm Qty 1 pcs suitable for SIT 150 series				
	GEV No.	100701	Ref. No.	—
ignition electrode connection M4 Qty 1 pcs				

¹incl. thermocouple fitting

accessories for 107114				
	GEV No.	100801	Ref. No.	—
gasket for pilot burner Qty 1 pcs				
	GEV No.	100897	Ref. No.	—
olive for pipe ø 4mm Qty 1 pcs for pilot burner				
	GEV No.	100898	Ref. No.	533023300
olive for pipe ø 6mm Qty 1 pcs for pilot burner				
	GEV No.	100906	Ref. No.	533018600
screw connection thread M10x1 for ignition electrode brass Qty 1 pcs WS 10				
	GEV No.	100908	Ref. No.	—
union screw thread M10x1 for pipe ø 4mm Qty 1 pcs				
	GEV No.	100909	Ref. No.	533018500 / VPE1 533039000
union screw thread M10x1 for pipe ø 6mm Qty 1 pcs				
	GEV No.	102110	Ref. No.	—
pilot tube copper pipe ø 4mm thickness 1mm L 3000mm				
	GEV No.	102111	Ref. No.	—
pilot tube copper pipe ø 6mm thickness 1mm L 3000mm				

160 series

1

GEV No.	100053	Ref. No.	533011500
description	pilot burner SIT type 160 series 2 flames nozzle ømm gas connectionmm		
spare parts for	100053		
	GEV No.	100907	Ref. No. —
screw connection thread M10x1 Qty 1 pcs type SEF 1 ømm for thermocouple			
accessories for	100053		
	GEV No.	100202	Ref. No. —
pilot burner nozzle natural gas code 41 Qty 1 pcs nozzle ø 0.41mm			
	GEV No.	100203	Ref. No. —
pilot burner nozzle LPG code 25 Qty 1 pcs nozzle ø 0.25mm			
	GEV No.	100701	Ref. No. —
ignition electrode connection M4 Qty 1 pcs			
	GEV No.	100801	Ref. No. —
gasket for pilot burner Qty 1 pcs			
	GEV No.	100869	Ref. No. —
pilot burner nozzle natural gas code 51 Qty 1 pcs suitable for 160 series nozzle ø 0.51mm			
	GEV No.	100906	Ref. No. 533018600
screw connection thread M10x1 for ignition electrode brass Qty 1 pcs WS 10			

Table continues overleaf



accessories for 100053				
	GEV No.	100908	Ref. No.	—
union screw thread M10x1 for pipe ø 4mm Qty 1 pcs				
	GEV No.	100909	Ref. No.	533018500 / VPE1 533039000
union screw thread M10x1 for pipe ø 6mm Qty 1 pcs				
	GEV No.	101282	Ref. No.	—
olive for pipe ø 4mm L 7.4mm Qty 1 pcs				
	GEV No.	101287	Ref. No.	—
olive for pipe ø 6mm Qty 1 pcs				
	GEV No.	102110	Ref. No.	—
pilot tube copper pipe ø 4mm thickness 1mm L 3000mm				
	GEV No.	102111	Ref. No.	—
pilot tube copper pipe ø 6mm thickness 1mm L 3000mm				
	GEV No.	107650	Ref. No.	533020200
pilot burner nozzle SIT LPG code 30 Qty 1 pcs				






1

GEV No.	100056	Ref. No.	533011000	
description	pilot burner SIT type 160 series 3 flames nozzle ømm gas connectionmm			
For models:	BM-4G, BM-61GF, BM-62GF, BM-6G, BM-8G, BR-62G, BR-6G, CP-62G, CP-6G, CP-74G, CP-74G-USA, CP-78G, CP-78G-USA, CP-94G, CP-94G-USA, CP-98G, CP-98G-USA, CPA-94G, CW-74G, CW-74G-USA, CW-78G, CW-78G-USA, CW-94G, CW-98G, CWT-64G, CWT-66G, CWT-68G, CWT-74G, CWT-74G-USA, CWT-78G, CWT-78G-USA, CWT-94G, CWT-98G, F11-54G, F13-64G, F13-74G, F13T-74G, F13T-94G, F18-74G, F2-13-78G, F2-13T-78G, F2-13T-98G, F2-18-78G, F2-8-74G, F2-8-94G, F2-8T-66G, F2-8T-74G, F2-8T-94G, F45-78G, F8T-63G...(Other models you can see in the webshop)			
spare parts for	100056			
	GEV No.	100907	Ref. No.	—
screw connection thread M10x1 Qty 1 pcs type SEF 1 ømm for thermocouple				
accessories for	100056			
	GEV No.	100202	Ref. No.	—
pilot burner nozzle natural gas code 41 Qty 1 pcs nozzle ø 0.41mm				
	GEV No.	100203	Ref. No.	—
pilot burner nozzle LPG code 25 Qty 1 pcs nozzle ø 0.25mm				
	GEV No.	100701	Ref. No.	—
ignition electrode connection M4 Qty 1 pcs				
	GEV No.	100801	Ref. No.	—
gasket for pilot burner Qty 1 pcs				
	GEV No.	100869	Ref. No.	—
pilot burner nozzle natural gas code 51 Qty 1 pcs suitable for 160 series nozzle ø 0.51mm				
	GEV No.	100870	Ref. No.	—
olive for pipe ø 4mm Qty 1 pcs suitable for 160 series for pilot burner				

accessories for 100056				
	GEV No.	100906	Ref. No.	533018600
screw connection thread M10x1 for ignition electrode brass Qty 1 pcs WS 10				
	GEV No.	100908	Ref. No.	—
union screw thread M10x1 for pipe ø 4mm Qty 1 pcs				
	GEV No.	100909	Ref. No.	533018500 / VPE1 533039000
union screw thread M10x1 for pipe ø 6mm Qty 1 pcs				
	GEV No.	101287	Ref. No.	—
olive for pipe ø 6mm Qty 1 pcs				
	GEV No.	102110	Ref. No.	—
pilot tube copper pipe ø 4mm thickness 1mm L 3000mm				
	GEV No.	102111	Ref. No.	—
pilot tube copper pipe ø 6mm thickness 1mm L 3000mm				
	GEV No.	107650	Ref. No.	533020200
pilot burner nozzle SIT LPG code 30 Qty 1 pcs				

electrodes

			
1	M4		
GEV No.	100706	Ref. No.	30100054
description	ignition electrode connection M4 Qty 1 pcs		

			
1			
GEV No.	100871	Ref. No.	537003000
description	ignition electrode D1 ø 7mm connection M4 to clip		
For models:	BM-4G, BM-61GF, BM-62GF, BM-6G, BM-74G, BM-78G, BM-8G, BR-62G, BR-6G, CP-62G, CP-6G, CP-74G, CP-78G, CPM-62G, CPM-6G, CW-4G, CW-61G, CW-62G, CW-6G, CW-74G, CW-78G, F13-74G, F18-74G, F2-13-78G, F2-18-78G, FG-10, FG-2-10, FMG-10, FMG-15, FMG-2-10, FMG-2-15, FMPG-20, FMPG-30, FP-62G, FP-6G, FPG-20, FPG-30, FQ-4G, FQ-61GF, FQ-62GF, FQ-6G, FQM-4G, FTL-4G, FTL-4GS, FTL-61G, FTL-61GF, FTL-61GS, FTL-61GSF, FTL-62G, FTL-62GF...(Other models you can see in the webshop)		

GEV No.	106619	Ref. No.	537010200
description	ignition electrode D1 ø 7mm D2 ø 9mm L1 8mm BL1 18mm BL2 3mm BL3 23mm to clip connection ø 2.4mm		
For models:	BRT-66G, CP-74G, CP-74G-USA, CP-78G, CP-78G-USA, CP-94G-USA, CP-98G-USA, CPP-94G-USA, CPT-64G, CPT-66G, CPT-74G, CPT-76G, CW-74G, CW-74G-USA, CW-78G, CW-78G-USA, CWT-74G-USA, CWT-78G-USA, FTL-54G, FTL-56G, FTL-712G, FTL-712GS, FTL-712G-USA, FTL-74G, FTL-74GS, FTL-74G-USA, FTL-76G, FTL-76GS, FTL-76G-USA, FTL-78G, FTL-78G-AUS, FTL-78GS, FTL-78G-USA, FTL-916G, FTL-94G, FTL-94GS, FTL-98G, FTL-98GS, FTLR-56G, FTLR-712G, FTLR-712GS, FTLR-712G-USA, FTLR-76G, FTLR-76GS, FTLR-76G-USA, FTLR-78G, FTLR-78G-AUS, FTLR-78GS, FTLR-78G-USA, FTLR-98G...(Other models you can see in the webshop)		

GEV No.	100729	Ref. No.	537002700
description	ignition electrode L1 5mm D1 ø 8mm D2 ø 10mm BL1 41mm BL2 14mm connection F 2.8x0.8mm to clip with spring		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF-62GEM, CF-62GEM-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, PC-61GF, PC-62GF		

GEV No.	100906	Ref. No.	533018600
description	screw connection thread M10x1 for ignition electrode brass Qty 1 pcs WS 10		
For models:	BM-4G, BM-61GF, BM-62GF, BM-6G, BM-74G, BM-78G, BM-8G, BM-94G, BM-98G, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, BR-62G, BR-6G, BRF-64G, BRF-74G, BRF-78G, BRF-94G, BRF-98G, BRT-66G, CF4-78G, CF4-78GP, CF4-78GP-AUS, CF4-78GP-USA, CF4-98G, CF6-712G, CF6-712GP, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912G, CF6-912GV, CF8-916G, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV, CFA6-912GV, CFPB6-79G, CP-62G, CP-66G, CP-6G, CP-74G, CP-74G-USA, CP-76G, CP-78, CP-78G...(Other models you can see in the webshop)		

ignition cables

pre-assembled cables

GEV No.	100190	Ref. No.	547010500
description	ignition cable cable length 1200mm connection F2.8mm / F2.8mm		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GF, CF4-8G, CF4-8GEM, CF-8G-A, CF-8GF		

GEV No.	100036	Ref. No.	537002500
description	ignition cable cable length 500mm connection F2.8mm / F2.8mm		
For models:	CF-10EM, CF-10EM-A, CF-10ET, CF-10ET-A, CF-62EM, CF-62EM-A, CF-62ET, CF-62ET-A, CF-8EM, CF-8EM-A, CF-8ET, CF-8ET-A, PC-61EM, PC-62EM, PC-62ET		

GEV No.	100197	Ref. No.	547002600
description	ignition cable cable length 600mm connection F2.8mm / ø2.4mm		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF-62GEM, CF-62GEM-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, CP-66G, CP-74G, CP-76G, CP-78, CP-94G, CP-98G, CPA-66G, CPA-74G, CPA-76G, CPA-78G, CPA-94G, CPA-98G, CPB-98G, CPBA-98G, F2-18-98G, F25-94G, FO-1G, FO-2G, FO-3G, PC-4G, PC-61GF, PC-62GF, PC-8G		

GEV No.	100018	Ref. No.	547013900
description	ignition cable cable length 600mm connection ø2.4mm / ø4mm permanent temperature 200°C		
For models:	CF4-98G, CF6-912G, CF6-912GV, CF8-916G, CF8-916GV, CFA4-98G, CFA6-912GV, CPB-98G, F45-78G, PAF-98G, TP-78G, TPF2-912G, TPF2-912GE, TPF2-912GV, TPF2-98G, TPF4-912G, TPF4-912GV, TPF-78G, TPF-78GE, TPF-98G		

GEV No.	100178	Ref. No.	547014600
description	ignition cable cable length 900mm connection F2.8mm / ø2.4mm		
For models:	CF4-8G, CF4-8GEM, CF4-GEMS, PC-12G, PC-4G, PC-8G		


ignition units

GEV No.	101002	Ref. No.	537060300
description	ignition unit outputs 2 230VAC dimensions 88x23x34mm mounting distance 73mm inlet F6.3x0.8 outlet F2.8x0.8 0.6VA 50/60Hz		
For models:	CP-66G, CP-74G, CP-76G, CP-78, CP-94G, CP-98G, CPA-66G, CPA-74G, CPA-76G, CPA-78G, CPA-94G, CPA-98G, CPB-98G, CPBA-98G, CPP-94G, CPP-94G-USA, F18-94G, F2-18-98G, F2-25-98G, F25-94G		



1

GEV No.	102388	Ref. No.	537006601
description	ignition unit outputs 4 230VAC dimensions 111x23x34mm mounting distance 100mm inlet F6.3x0.8 outlet F2.8x0.8 type WAC-T4 0.6VA 50/60Hz		
For models:	CF4-68GEM, CF4-8GEM, CF4-GEMS, CF6-610G, CFM4-66GEM, CFM4-68GEM, TPF4-610G		



1

GEV No.	102389	Ref. No.	537005601
description	ignition unit outputs 6 230VAC dimensions 135x23x34mm mounting distance 123mm inlet F6.3x0.8 outlet F2.8x0.8 0.6VA 50/60Hz		


thermocouples

plug-in thermocouples

plug-in thermocouples standard


with barrel socket ø6(6.5)mm

thermocouples SIT

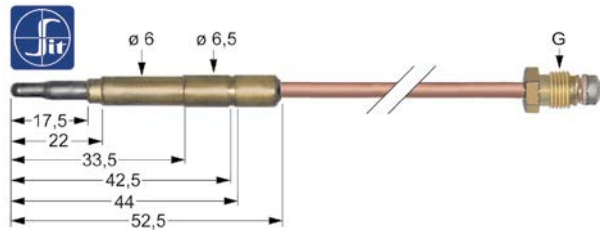


1

GEV No.	107621	Ref. No.	10070
description	thermocouple SIT M10x1 L 1500mm plug connection ø6.0(6.5)mm		

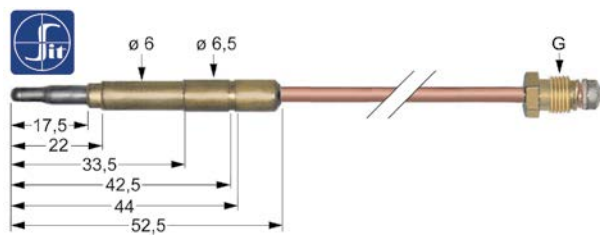


1

GEV No.	107600	Ref. No.	05-000-0029
description	thermocouple SIT M8x1 L 320mm plug connection ø6.0(6.5)mm		

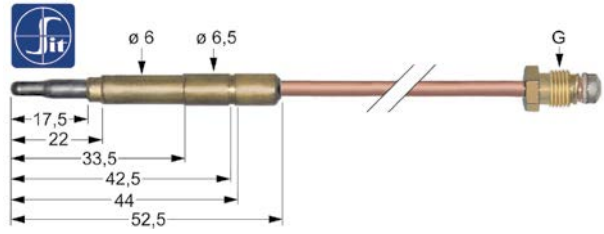


1

GEV No.	107614	Ref. No.	533041800
description	thermocouple SIT M9x1 L 1500mm plug connection ø6.0(6.5)mm		
For models:	CF4-78G, CF4-78GP, CF4-78GP-AUS, CF4-78GP-USA, CF4-98G, CF6-712G, CF6-712GP, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912G, CF6-912GV, CF8-916G, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV, CFA6-912GV, CFPB6-79G, PAF-78G, PAF-98G, TPF2-712G, TPF2-712GPV, TPF2-712GV, TPF2-78GP, TPF2-912G, TPF2-912GE, TPF2-912GV, TPF2-98G, TPF4-712GP, TPF4-712GPV, TPF4-912G, TPF4-912GV, TPF-78G, TPF-98G		

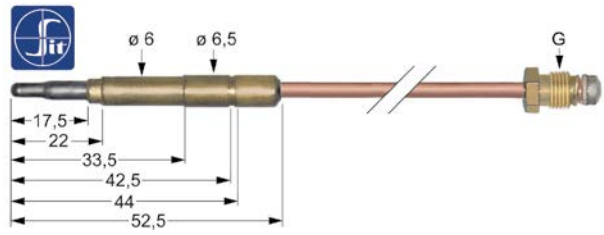

1

GEV No.	107608	Ref. No.	533045700 533053200
description	thermocouple SIT M9x1 L 500mm plug connection ø6.0(6.5)mm		
For models:	BM-4G, BM-61GF, BM-62GF, BM-6G, BM-74G, BM-78G, BM-8G, BM-94G, BM-98G, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, BR-62G, BR-6G, BRF-64G, BRF-74G, BRF-78G, BRF-94G, BRF-98G, BRT-66G, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98G, CF4-98GE, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-912G, CF6-912GE, CF6-912GEV, CF6-912GV, CF-712GPE, CF8-916G, CF8-916GE, CF8-916GEV, CF8-916GV, CFV4-78GPE, CFV4-98GE, CFV6-712GPEV, CFV6-912GEV, CP-62G, CP-6G, CP-74G...(Other models you can see in the webshop)		

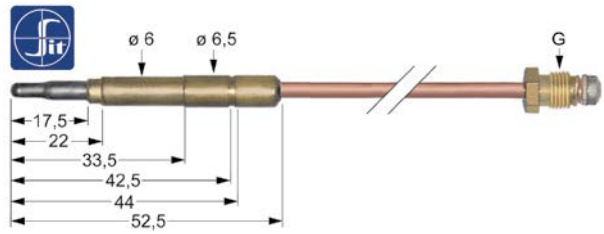

1


GEV No.	107611	Ref. No.	533039400
description	thermocouple SIT M9x1 L 850mm plug connection ø6.0(6.5)mm		
For models:	CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98G, CF4-98GE, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-912G, CF6-912GE, CF6-912GEV, CF6-912GV, CF8-916G, CF8-916GE, CF8-916GEV, CF8-916GV, CFM2-68GEM, CFM3-612GEMV, CFV4-78GPE, CFV4-98GE, CFV6-712GPEV, CFV6-912GEV, CP-66G, CP-76G, CPA-66G, CPA-76G, CPB-98G, CPBA-98G, CPM-62G, CPM-6G, PC1T-64G, PC2T-68G, PC3-612G, PC3T-612G, PC-712GP, PC-712GP-USA, PC-716GP, PC-716GP-USA, PC-74GP...(Other models you can see in the webshop)		

threaded thermocouples


threaded thermocouples standard

with socket with thread M8x1


SIT

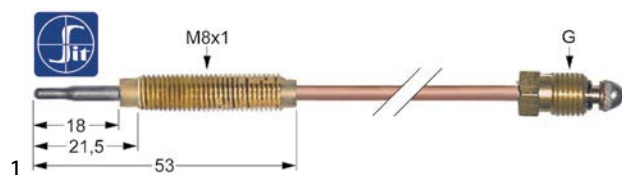

GEV No.	107633	Ref. No.	533011800
description	thermocouple SIT M8x1 L 1200mm M8x1		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GF, CF4-8G, CF4-8GEM, CF-8G-A, CF-8GF		
accessories for	107633		
	GEV No.	102067	Ref. No. 533009800
nut thread M8x1 H 3mm brass Qty 1 pcs type SEF 1			

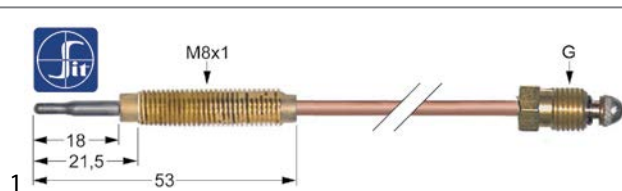


GEV No.	107634	Ref. No.	533053700
description	thermocouple SIT M8x1 L 1500mm M8x1		
For models:	CF4-8G, CF4-8GEM		
accessories for	107634		
	GEV No.	102067	Ref. No. 533009800
nut thread M8x1 H 3mm brass Qty 1 pcs type SEF 1			

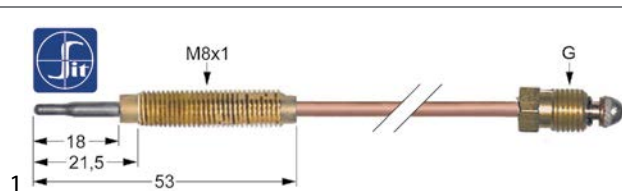

GEV No.	107630	Ref. No.	53301100
description	thermocouple SIT M8x1 L 600mm M8x1		
accessories for	107630		
	GEV No.	102067	Ref. No. 533009800
nut thread M8x1 H 3mm brass Qty 1 pcs type SEF 1			

thermopiles

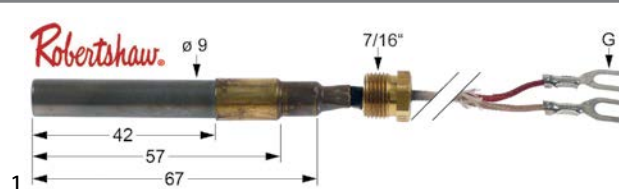

GEV No.	102116	Ref. No.	537033000
description	thermopile ROBERTSHAW L 900mm probe ø 9mm probe L 57mm 250-750mV screw connection 7/16"		

extensions



GEV No.	102013	Ref. No.	533053300
description	thermocouple extension thread M9x1 L 500mm		
For models:	BM-4G, BM-6G, BM-74G, BM-78G, BM-8G, BM-94G, BM-98G, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, CP-62G, CP-6G, F13T-74G, F-1G, F2-13T-78G, F2-8T-66G, F45-78G, F8T-63G, FP-62G, FP-6G, FQ-4G, FQ-61GF, FQ-62GF, FQ-6G, FQM-4G, FTL-54G, FTL-56G, FTL-712G, FTL-712GS, FTL-712G-USA, FTL-74G, FTL-74GS, FTL-74G-USA, FTL-76G, FTL-76G-USA, FTL-78G, FTL-78G-AUS, FTL-78GS, FTL-78G-USA, FTL-916G, FTL-94G, FTL-94GS, FTL-98G, FTL-98GS, FTLR-56G, FTLR-712G, FTLR-712GS...(Other models you can see in the webshop)		
accessories for	102013		

	GEV No.	101260	Ref. No.	—
thermocouple fitting thread M8x1 Qty 1 pcs				
	GEV No.	101261	Ref. No.	—
thermocouple fitting thread M9x1 Qty 1 pcs				
	GEV No.	101262	Ref. No.	—
thermocouple fitting thread M10x1 Qty 1 pcs				
	GEV No.	101263	Ref. No.	—
thermocouple fitting thread ASA 11/32 Qty 1 pcs				

accessories

nuts



GEV No.	102067	Ref. No.	533009800
description	nut thread M8x1 H 3mm brass Qty 1 pcs type SEF 1		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF4-78G, CF4-78GE, CF4-8G, CF4-8GEM, CF4-8GEM-6, CF-62GEM, CF-62GEM-A, CF6-712G, CF6-712GEV, CF6-712GV, CF-712GE, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, F-1G, FB-1G, FO-1G, FO-2G, FO-3G, FOS-1G, FOS-2G, FOS-3G, PC-12G, PC-4G, PC-61GF, PC-62GF, PC-712G, PC-716G, PC-74G, PC-78G, PC-8G, TP2-712G, TPF2-712G, TPF2-712GV		



interrupters



1

GEV No.	101265	Ref. No.	533011600
description	interrupter thread M9x1		
For models:	FG-10, FG-2-10, FMG-10, FMG-15, FMG-2-10, FMG-2-15, FMPG-20, FMPG-30, FP-62G, FP-6G, FPG-20, FPG-30, FQ-4G, FQ-61GF, FQ-62GF, FQ-6G, FQM-4G		



1

GEV No.	100522	Ref. No.	533032400
description	gas injector thread M7x1 WS 10 bore ø 1.35mm		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF-62GEM, CF-62GEM-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, PC-61GF, PC-62GF		

gas nozzles

main nozzles

gas nozzles M7x1



1

GEV No.	102549	Ref. No.	533049000
description	gas injector thread M7x1 WS 10 bore ø 0.72mm		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF-62GEM, CF-62GEM-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, PC-61GF, PC-62GF		



1

GEV No.	102554	Ref. No.	533032100
description	gas injector thread M7x1 WS 10 bore ø 0.82mm		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF-62GEM, CF-62GEM-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, PC-61GF, PC-62GF		



1

GEV No.	100520	Ref. No.	533049100
description	gas injector thread M7x1 WS 10 bore ø 1.2mm		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF-62GEM, CF-62GEM-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, PC-61GF, PC-62GF		



1

GEV No.	103322	Ref. No.	533032300
description	gas injector thread M7x1 WS 10 bore ø 1.42mm		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF-62GEM, CF-62GEM-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, PC-61GF, PC-62GF		



1

GEV No.	100525	Ref. No.	533012500
description	gas injector thread M7x1 WS 10 bore ø 1.6mm		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF-62GEM, CF-62GEM-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, PC-61GF, PC-62GF		

gas nozzles M10x1



1

GEV No.	100444	Ref. No.	53.3.0151.00
description	gas injector thread M10x1 WS 12 bore ø 0.8mm		
For models:	BM-94G, BMT-94G, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF-712GPE, CFV4-78GPE, CFV6-712GPEV, CP-62G, CP-6G, F11-54G, F2-8T-66G, F8T-63G, FP-62G, FQ-61GF, FQ-62GF, FQM-4G, PC-712GP, PC-712GP-USA, PC-716GP, PC-716GP-USA, PC-74GP, PC-74GP-USA, PC-78GP, PC-78GP-USA, PCD-64G, PCD-68G, PCT-712GP, PCT-712GP-USA, PCT-716GP, PCT-716GP-USA, PCT-74GP, PCT-78GP, PCT-78GP-USA, TP4-712GP, TP4T-712GP, TPF4-712GP, TPF4-712GPE, TPF4-712GPEV, TPF4-712GPV, TPFV4-712GPEV		

			
GEV No.	100471	Ref. No.	533014800
description	gas injector thread M10x1 WS 12 bore ø 1.35mm		
For models:	CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98G, CF4-98GE, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-912G, CF6-912GE, CF6-912GEV, CF6-912GV, CF-712GPE, CF8-916G, CF8-916GE, CF8-916GEV, CF8-916GV, CFM2-68GEM, CFM3-612GEMV, CFV4-78GPE, CFV4-98GE, CFV6-712GPEV, CFV6-912GEV, CP-62G, CP-74G, CP-74G-USA, CP-78, CP-78G, CP-78G-USA, CPA-74G, CPA-78G, CW-74G, CW-74G-USA, CW-78G, CW-78G-USA, CW-94G, CW-98G, CWT-74G, CWT-78G...(Other models you can see in the webshop)		

			
GEV No.	100474	Ref. No.	533014900
description	gas injector thread M10x1 WS 12 bore ø 1.5mm		
For models:	CF2-58G, CF2-58GE, CF2-68G, CF3-512GEV, CF3-512GV, CF3-612GV, CF4-68G, CF4-68GEM, CF4-78G, CF4-78GE, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-8G, CF4-8GEM, CF4-98G, CF4-98GE, CF4-98GEM, CF6-610G, CF6-610GEM, CF6-712G, CF6-712GEV, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912G, CF6-912GE, CF6-912GEV, CF6-912GV, CF-712GE, CF-712GPE, CF8-916G, CF8-916GE, CF8-916GEV, CF8-916GV, CFM4-66GEM, CFM4-68GEM, CFM6-610GEM, CFV4-78GPE, CFV4-98GE, CFV6-712GPEV, CFV6-912GEV, CPT-66G, CPT-74G, CPT-76G, CW-74G...(Other models you can see in the webshop)		

			
GEV No.	102550	Ref. No.	533031401
description	gas injector thread M10x1 WS 12 bore ø 1.55mm		
For models:	BM-4G, BM-62GF, BM-6G, BM-8G, BMT-66G, FTL-61G, FTL-61GF, FTL-61GS, FTL-61GSF, FTL-62G, FTL-62GF, FTL-62GS, FTL-62GSF, FTL-63G, FTL-64G, FTL-916G, FTL-94G, FTL-94GS, FTL-98G, FTL-98GS, FTLR-62G, FTLR-62GF, FTLR-62GS, FTLR-62GSF, FTLR-63G, FTLR-64G, FTLR-98G, FTLR-98GS, FTR-61G, FTR-61GF, FTR-61GS, FTR-61GSF, FTR-62G, FTR-62GF, FTR-62GS, FTR-62GSF, FTR-94G, FTR-94GS, FTR-98G, FTR-98GS, FTL-610G, FTL-64G, FTL-66G, FTL-68G, FTL-94G, FTL-94GS, FTLR-98G, FTLR-98GS, FTLR-610G, FTLR-66G...(Other models you can see in the webshop)		

pilot burner nozzles

pilot burner nozzles SIT

100 series

			
GEV No.	100245	Ref. No.	533091000
description	pilot burner nozzle LPG code 20 bore ø 0.2mm Qty 1 pcs thread M8x0.75		
For models:	CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98G, CF4-98GE, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-912G, CF6-912GE, CF6-912GEV, CF6-912GV, CF-712GPE, CF8-916G, CF8-916GE, CF8-916GEV, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV, CFA6-912GV, CFM2-68GEM, CFM3-612GEMV, CFV4-78GPE, CFV4-98GE, CFV6-712GPEV, CFV6-912GEV, PA-78G, PA-98G, PAF-78G, PAF-98G, PAT-78G, PAT-98G, PC1T-64G, PC2T-68G, PC3-612G, PC3T-612G, PC-712GP, PC-712GP-USA...(Other models you can see in the webshop)		

			
GEV No.	100246	Ref. No.	533091200
description	pilot burner nozzle natural gas bore ø 0.35mm Qty 1 pcs thread M8x0.75		
For models:	CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98G, CF4-98GE, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-912G, CF6-912GE, CF6-912GEV, CF6-912GV, CF-712GPE, CF8-916G, CF8-916GE, CF8-916GEV, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV, CFA6-912GV, CFM2-68GEM, CFM3-612GEMV, CFV4-78GPE, CFV4-98GE, CFV6-712GPEV, CFV6-912GEV, PA-78G, PA-98G, PAF-78G, PAF-98G, PAT-78G, PAT-98G, PC1T-64G, PC2T-68G, PC3-612G, PC3T-612G, PC-712GP, PC-712GP-USA...(Other models you can see in the webshop)		

140/150 series

			
GEV No.	100205	Ref. No.	533020500
description	pilot burner nozzle SIT LPG code 19 bore ø 0.23/0.26mm Qty 1 pcs suitable for SIT 150 series		
For models:	BRT-66G, CF4-78G, CF4-78GP, CF4-78GP-AUS, CF4-78GP-USA, CF4-98G, CF6-712G, CF6-712GP, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912G, CF6-912GV, CF8-916G, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV, CFA6-912GV, CFPB6-79G, FTL-54G, FTL-56G, FTL-712G, FTL-712GS, FTL-712G-USA, FTL-74G, FTL-74GS, FTL-74G-USA, FTL-76G, FTL-76GS, FTL-76G-USA, FTL-78G, FTL-78G-AUS, FTL-78GS, FTL-78G-USA, FTL-916G, FTL-94G, FTL-94GS, FTL-98G, FTL-98GS, FTLR-56G, FTLR-712G, FTLR-712GS, FTLR-712G-USA, FTLR-712G-USA, FTLR-76G, FTLR-76GS, FTLR-76G-USA, FTLR-78G, FTLR-78G-AUS, FTLR-78GS...(Other models you can see in the webshop)		

			
GEV No.	100207	Ref. No.	533020600
description	pilot burner nozzle SIT natural gas code 27 bore ø 0.40/0.38mm suitable for SIT 140 series		
For models:	BRT-66G, CF4-78G, CF4-78GP, CF4-78GP-AUS, CF4-78GP-USA, CF4-98G, CF6-712G, CF6-712GP, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912G, CF6-912GV, CF8-916G, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV, CFA6-912GV, CFPB6-79G, CPT-64G, CPT-66G, CPT-74G, CPT-76G, FTL-54G, FTL-56G, FTL-712G, FTL-712GS, FTL-712G-USA, FTL-74G, FTL-74GS, FTL-74G-USA, FTL-76G, FTL-76GS, FTL-76G-USA, FTL-78G, FTL-78G-AUS, FTL-78GS, FTL-78G-USA, FTL-916G, FTL-94G, FTL-94GS, FTL-98G, FTL-98GS, FTLR-56G, FTLR-712G, FTLR-712GS, FTLR-712G-USA, FTLR-76G, FTLR-76GS...(Other models you can see in the webshop)		

160 series

			
GEV No.	107172	Ref. No.	533020800
description	pilot burner nozzle SIT LPG code 25 Qty 1 pcs		
For models:	BM-74G, BM-78G, BM-94G, BM-98G, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, BRF-74G, BRF-78G, BRF-94G, BRF-98G, CP-66G, CP-74G, CP-74G-USA, CP-76G, CP-78, CP-78G, CP-78G-USA, CPA-66G, CPA-74G, CPA-76G, CPA-78G, CPP-94G, CPP-94G-USA, CPT-64G, CPT-66G		



			
GEV No.	107650	Ref. No.	533020200
description	pilot burner nozzle SIT LPG code 30 Qty 1 pcs		
For models:	BM-4G, BM-61GF, BM-62GF, BM-6G, BM-74G, BM-78G, BM-8G, BR-62G, BR-6G, BRF-64G, BRF-74G, BRF-78G, CP-62G, CP-6G, CP-74G, CP-74G-USA, CP-78G, CP-78G-USA, CP-94G, CP-94G-USA, CP-98G, CP-98G-USA, CPA-94G, CPA-98G, CPB-98G, CPBA-98G, CPM-62G, CPM-6G, CW-4G, CW-61G, CW-62G, CW-6G, CW-74G, CW-74G-USA, CW-78G, CW-78G-USA, CW-94G, CW-98G, CWT-64G, CWT-66G, CWT-68G, CWT-74G, CWT-78G, CWT-94G, CWT-98G, F11-54G, F13-64G, F13-74G, F13T-74G, F13T-94G...(Other models you can see in the webshop)		

			
GEV No.	107174	Ref. No.	533020300
description	pilot burner nozzle SIT natural gas code 41 Qty 1 pcs		
For models:	BM-74G, BM-78G, BM-94G, BM-98G, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, BRF-74G, BRF-78G, BRF-94G, BRF-98G, CP-66G, CP-74G, CP-74G-USA, CP-76G, CP-78, CP-78G, CP-78G-USA, CPA-66G, CPA-74G, CPA-76G, CPA-78G, CPB-98G, CPBA-98G, CPP-94G, CPP-94G-USA, CPT-64G, CPT-66G		

			
GEV No.	107175	Ref. No.	533020400
description	pilot burner nozzle SIT natural gas code 51 Qty 1 pcs suitable for 160 series		
For models:	BM-4G, BM-61GF, BM-62GF, BM-6G, BM-74G, BM-78G, BM-8G, BR-62G, BR-6G, BRF-64G, BRF-74G, BRF-78G, CP-62G, CP-6G, CP-74G, CP-74G-USA, CP-78G, CP-78G-USA, CP-94G, CP-94G-USA, CP-98G, CP-98G-USA, CPA-94G, CPA-98G, CPM-62G, CPM-6G, CW-4G, CW-61G, CW-62G, CW-6G, CW-74G, CW-74G-USA, CW-78G, CW-78G-USA, CW-94G, CW-98G, CWT-64G, CWT-66G, CWT-68G, CWT-74G, CWT-78G, CWT-94G, CWT-98G, F11-54G, F13-64G, F13-74G, F13T-74G, F13T-94G, F18-74G, F18-94G...(Other models you can see in the webshop)		

screw connections

olives

			
GEV No.	101278	Ref. No.	533039300
description	olive for pipe ø 10mm Qty 1 pcs		
For models:	BM-4G, BM-61GF, BM-62GF, BM-6G, BM-74EM, BM-74G, BM-78EM, BM-78G, BM-8G, BM-94EM, BM-94G, BM-98EM, BM-98G, BMD-64EM, BMD-84EM, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, BR-62G, BR-6G, BRF-64G, BRF-74G, BRF-78G, BRF-94G, BRT-66G, CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-68G, CF4-68GEM, CF4-78ET, CF4-78ETX, CF4-78G, CF4-78GE, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-8G, CF4-8GEM, CF4-98ET, CF4-98ETX...(Other models you can see in the webshop)		
accessories for	101278		
	GEV No.	100943	Ref. No. —
	union nut thread M17x1 tube ø 10mm		

accessories for	101278		
	GEV No.	101300	Ref. No. 533010800
	union nut thread M16x1.5 tube ø 10mm		
	GEV No.	101478	Ref. No. —
	union nut thread 3/8" for pipe ø 10mm		

			
GEV No.	101273	Ref. No.	533017900
description	olive for pipe ø 12mm L 9.5mm brass Qty 1 pcs suitable for universal		
For models:	BM-61GF, BM-62GF, BM-74G, BM-78G, BM-94G, BM-98G, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, BRF-64G, BRF-74G, BRF-78G, BRF-94G, BRF-98G, CP-62G, CP-6G, CPM-62G, F11-54G, F13-64G, F13-74G, F13T-74G, F13T-94G, F18-74G, F2-13-78G, F2-13T-78G, F2-13T-98G, F2-18-78G, F2-8-74G, F2-8-94G, F2-8T-66G, F2-8T-74G, F2-8T-94G, F8T-63G, FG-10, FG-2-10, FMG-10, FMG-15, FMG-2-10, FMG-2-15, FMPG-20, FMPG-30, FP-62G, FP-6G, FPG-20, FPG-30, FQ-4G, FQ-61GF...(Other models you can see in the webshop)		
accessories for	101273		
	GEV No.	100944	Ref. No. —
	union nut thread M18x1.5 for pipe ø 12mm		
	GEV No.	101276	Ref. No. 533018000
	union screw thread 3/8" tube ø 12mm Qty 1 pcs		

			
GEV No.	106598	Ref. No.	533010200
description	olive for pipe ø 18mm Qty 1 pcs ED ø 21mm		
For models:	BM-10EM, BM-10EMX, BM-4EM, BM-4EMX, BM-4G, BM-61EM, BM-61GF, BM-62EM, BM-62ET, BM-62GF, BM-6EM, BM-6EMX, BM-6G, BM-8EM, BM-8EMX, BM-8G, BMT-63EM, BMT-64EM, BMT-64G, BMT-66EM, BMT-66G, BMT-74EM, BMT-74G, BMT-78EM, BMT-78G, BMT-94EM, BMT-94G, BMT-98EM, BMT-98G, BS-4EM, BS-4EMX, CP-61EM, CP-62ET, CP-62G, CP-6G, CPT-64EM-USA, CPT-64ET, CPT-64G, CPT-66ET, CPT-66G, CPT-74ET, CPT-74G, CPT-76ET, CPT-76G, CWK-74ET, CWK-78ET, CWK-94ET, CWK-98ET, CWKT-64ET, CWKT-68ET...(Other models you can see in the webshop)		


			
GEV No.	100898	Ref. No.	533023300
description	olive for pipe ø 6mm Qty 1 pcs for pilot burner		
For models:	BRT-66G, CF4-78G, CF4-78GP, CF4-78GP-AUS, CF4-78GP-USA, CF4-98G, CF6-712G, CF6-712GP, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912G, CF6-912GV, CF8-916G, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV, CFA6-912GV, CFPB6-79G, CPT-64G, CPT-66G, CPT-74G, CPT-76G, FTL-54G, FTL-56G, FTL-712G, FTL-712GS, FTL-712G-USA, FTL-74G, FTL-74GS, FTL-74G-USA, FTL-76G, FTL-76GS, FTL-76G-USA, FTL-78G, FTL-78G-AUS, FTL-78GS, FTL-78G-USA, FTL-916G, FTL-94G, FTL-94GS, FTL-98G, FTL-98GS, FTLR-56G, FTLR-712G, FTLR-712GS, FTLR-712G-USA, FTLR-76G, FTLR-76GS...(Other models you can see in the webshop)		
accessories for	100898		
	GEV No.	100909	Ref. No. 533018500 / VPE1 533039000
	union screw thread M10x1 for pipe ø 6mm Qty 1 pcs		



			
1			
GEV No.	101857	Ref. No.	533010400
description	olive for pipe ø 6mm Qty 1 pcs suitable for 160 series for pilot burner		
For models:	BM-4G, BM-61GF, BM-62GF, BM-6G, BM-74G, BM-78G, BM-8G, BM-94G, BM-98G, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, BR-62G, BR-6G, BRF-64G, BRF-74G, BRF-78G, BRF-94G, BRF-98G, CP-62G, CP-66G, CP-6G, CP-74G, CP-74G-USA, CP-76G, CP-78, CP-78G, CP-78G-USA, CP-94G, CP-94G-USA, CP-98G, CP-98G-USA, CPA-66G, CPA-74G, CPA-76G, CPA-78G, CPA-94G, CPA-98G, CPB-98G, CPBA-98G, CPM-62G, CPM-6G, CPP-94G, CPP-94G-USA, CPT-64G, CPT-66G, CW-4G...(Other models you can see in the webshop)		

			
1			
GEV No.	101286	Ref. No.	533039100
description	olive ID ø 6mm Qty 1 pcs		
accessories for	101286		
	GEV No.	100909	Ref. No. 533018500 / VPE1 533039000
	union screw thread M10x1 for pipe ø 6mm Qty 1 pcs		
	GEV No.	101464	Ref. No. —
	union nut thread M12x1 for pipe ø 6mm		

union nuts

			
1			
GEV No.	101300	Ref. No.	533010800
description	union nut thread M16x1.5 tube ø 10mm		
For models:	BM-4G, BM-61GF, BM-62GF, BM-6G, BM-74EM, BM-74G, BM-78EM, BM-78G, BM-8G, BM-94EM, BM-94G, BM-98EM, BM-98G, BMD-64EM, BMD-84EM, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, BR-62G, BR-6G, BRF-64G, BRF-74G, BRF-78G, BRF-94G, BRT-66G, CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-68G, CF4-68GEM, CF4-78ET, CF4-78ETX, CF4-78G, CF4-78GE, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-8G, CF4-8GEM, CF4-98ET, CF4-98ETX...(Other models you can see in the webshop)		
accessories for	101300		
	GEV No.	101278	Ref. No. 533039300
	olive for pipe ø 10mm Qty 1 pcs		

union screws

			
1			
GEV No.	100905	Ref. No.	533018300
description	locking screw M10x1 for pipe ø 6mm Qty 1 pcs		

			
1			
GEV No.	100906	Ref. No.	533018600
description	screw connection thread M10x1 for ignition electrode brass Qty 1 pcs WS 10		
For models:	BM-4G, BM-61GF, BM-62GF, BM-6G, BM-74G, BM-78G, BM-8G, BM-94G, BM-98G, BMT-64G, BMT-66G, BMT-74G, BMT-78G, BMT-94G, BMT-98G, BR-62G, BR-6G, BRF-64G, BRF-74G, BRF-78G, BRF-94G, BRF-98G, BRT-66G, CF4-78G, CF4-78GP, CF4-78GP-AUS, CF4-78GP-USA, CF4-98G, CF6-712G, CF6-712GP, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912G, CF6-912GV, CF8-916G, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV, CFA6-912GV, CFPB6-79G, CP-62G, CP-66G, CP-6G, CP-74G, CP-74G-USA, CP-76G, CP-78, CP-78G...(Other models you can see in the webshop)		

			
1			
GEV No.	106597	Ref. No.	533010100
description	union screw thread 3/4" for pipe ø 18mm L 20mm Qty 1 pcs WS 27		
For models:	BM-10EM, BM-10EMX, BM-4EM, BM-4EMX, BM-4G, BM-61EM, BM-61GF, BM-62EM, BM-62ET, BM-62GF, BM-6EM, BM-6EMX, BM-6G, BM-8EM, BM-8EMX, BM-8G, BMT-63EM, BMT-64EM, BMT-64G, BMT-66EM, BMT-66G, BMT-74EM, BMT-74G, BMT-78EM, BMT-78G, BMT-94EM, BMT-94G, BMT-98EM, BMT-98G, BS-4EM, BS-4EMX, CP-61EM, CP-62ET, CP-62G, CP-6G, CPT-64EM-USA, CPT-64ET, CPT-64G, CPT-66ET, CPT-66G, CPT-74ET, CPT-74G, CPT-76ET, CPT-76G, CWK-74ET, CWK-78ET, CWK-94ET, CWK-98ET, CWKT-64ET, CWKT-68ET...(Other models you can see in the webshop)		

			
1			
GEV No.	100909	Ref. No.	533018500 / VPE1 533039000
description	union screw thread M10x1 for pipe ø 6mm Qty 1 pcs		
accessories for	100909		
	GEV No.	100898	Ref. No. 533023300
	olive for pipe ø 6mm Qty 1 pcs for pilot burner		
	GEV No.	101286	Ref. No. 533039100
	olive ID ø 6mm Qty 1 pcs		
	GEV No.	101287	Ref. No. —
	olive for pipe ø 6mm Qty 1 pcs		
	GEV No.	101288	Ref. No. —
	olive for pipe ø 6mm L 6mm aluminium Qty 1 pcs ED ø 8.5mm		



1

GEV No.	101477	Ref. No.	533016200 533026400
description	union screw thread M13x1 tube ø 8mm Qty 1 pcs		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF2-58G, CF2-58GE, CF2-68G, CF3-512GEV, CF3-512GV, CF3-612GV, CF4-68G, CF4-8G, CF4-8GEM, CF-62GEM, CF-62GEM-A, CF6-610G, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, PC-61GF, PC-62GF, TPF4-610G		



1

GEV No.	691628	Ref. No.	C1717-00
description	injection nozzle bore ø 0.5mm D1 ø 6mm D2 ø 10.5mm L 35mm WS 14 brass		



1

GEV No.	691629	Ref. No.	C1418-00
description	injection nozzle bore ø 0.7mm D1 ø 6mm D2 ø 11.5mm L 38mm WS 14 brass thread 1/8"		

equipmentspecific units

for convection ovens/combi-steamers

bushes



1

GEV No.	696841	Ref. No.	C9010-00
description	bush ED ø 7.8mm L 18mm IT M6		



1

GEV No.	696844	Ref. No.	C1043-00
description	bush for pivot bearing combi-steamer ID ø 10mm ED ø 14mm L 18mm		



1

GEV No.	696840	Ref. No.	C9034-00
description	spacer bush ID ø 8.5mm ED ø 20mm L 11.5mm		

injection nozzles



1

GEV No.	691627	Ref. No.	C1715-00
description	injection nozzle bore ø 0.4mm D1 ø 6mm D2 ø 11.5mm L 35mm WS 14 brass		

spare parts and accessories



1

GEV No.	551458	Ref. No.	C8136-00
description	connecting piece L 45mm W 15mm H 38mm		

filters



1

GEV No.	701652	Ref. No.	C2125-00
description	drain filter ø 86mm H 30mm for combi-steamer spout ø 34mm		

door mechanics

accessories



1

GEV No.	696845	Ref. No.	C2094-00
description	base plate W 38mm hole ø 7mm stainless steel L 192mm		



1

GEV No.	696842	Ref. No.	C9037-00
description	bush hole ø 5mm stainless steel L 16mm		

			
1			
GEV No.	696838	Ref. No.	C8305-00
description	nut thread M10x1 WS 14 brass Qty 1 pcs serrated for door hinge		

knobs

universal knobs

			
1			
GEV No.	111533	Ref. No.	MANOP003
description	knob thermostat t.max. 500°C ø 50mm shaft ø 6x4.6mm shaft flat upper black temperature range 0-500°C rotation 270°		
accessories for	111533		
	GEV No.	110135	Ref. No.
			—
	rosette knob up to ø 52mm		

producer-specific knobs

LOTUS

			
1			
GEV No.	110324	Ref. No.	536002600
description	knob thermostat t.max. 300°C ø 40mm shaft ø 6x4.6mm shaft flat left rotation 310° black temperature range 50-300°C		
For models:	FTC-61EM, FTC-61ET, FTC-62EM, FTC-62ET, FTL-61EM, FTL-61EMS, FTL-62EM, FTL-62EMS, FTL-63EM, FTL-63EMS, FTL-64EM, FTL-64EMS, FTLR-62EM, FTLR-62EMS, FTLR-63EM, FTLR-63EMS, FTLR-64EM, FTLR-64EMS, FTR-61EM, FTR-61EMS, FTR-62EM, FTR-62EMS		

			
1			
GEV No.	110081	Ref. No.	536017100
description	knob ø 70mm shaft ø 8x6.5mm shaft flat universal		
For models:	BM-4G, BM-6G, BM-8G, BR-6G, CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GF, CF4-78G, CF4-78GE, CF4-8G, CF4-8GEM, CF4-8GEMS, CF6-712G, CF6-712GEV, CF6-712GV, CF-712GE, CF-8G-A, CF-8GF, CP-6G, CP-74G, CP-78G, CPM-6G, CW-4G, CW-6G, CW-74G, CW-78G, F13-74G, F18-74G, F-1G, F2-13-78G, F2-18-78G, FB-1G, FO-1G, FO-2G, FO-3G, FOS-1G, FOS-2G, FOS-3G, FP-6G, FQ-4G, FQ-6G, FQM-4G, FTL-4G, FTL-4GS, FTL-6G, FTL-6GS, FTL-8G, FTL-8GS, FTLR-6G...(Other models you can see in the webshop)		

			
1			
GEV No.	110584	Ref. No.	539018500
description	knob dial plate energy regulator 1-6 t.max.°C°C turn direction clockwise ED ø 63mm ID ø 45.5mm red		
For models:	CFC4-78ET, CFC4-8ET, FTC-74ET, FTC-78ET, FTC-94ET, FTC-98ET, FTCT-64ET, FTCT-66ET, FTCT-74ET, FTCT-78ET, FTCT-94ET, FTCT-98ET, PCC-4EM, PCC-4EMX, PCC-4ET, PCC-6EM, PCC-6EMX, PCC-6ET, PCC-74ET, PCC-78ET, PCC-8EMX, PCC-8ET, PCI-74ET, PCI-78ET, PCI-94ET, PCI-98ET, PCIT-64ET, PCIT-74ET, PCIT-78ET, PCIT-94ET, PCIT-98ET, PCIW-4ET, PCIW-74ET, PCIW-94ET, PCIWT-64ET, PCIWT-74ET, PCIWT-94ET, SA-400EM, SA-400EMX, SA-600EM, SA-600EMX, SA-600ET, SA-600ETX, SL-600, SL-600EM, SL-600EMX, SL-600ET, SL-600ETX, SL-600X, SLC-600EM...(Other models you can see in the webshop)		

locks

edgemount latches

handle latches

CAFF/FERMOD

			
1			
GEV No.	700060	Ref. No.	C2210-01
description	handle latch L 150mm mounting distance 133mm non lockable heated units G 791		
accessories for	700060		
	GEV No.	700061	Ref. No.
			C2210-02
	door catch L 58mm W 20mm H 35mm mounting distance 42mm chrome-plated brass for headed units		
	GEV No.	700062	Ref. No.
			—
	handle protection heated units		

producer-specific

HOUNÖ



1

GEV No.	694784	Ref. No.	RRC2211-01
description	catch L 172mm mounting distance 124/133mm chrome-plated non lockable heated units 6200 H 65mm type DUPLO total length 248mm		
accessories for	694784		
	GEV No.	690123	Ref. No. —
	door catch H 69mm D 37mm W 20mm mounting distance 43mm with roller		

INOXTREND



1

GEV No.	690536	Ref. No.	C8118-00 C8118-00CR
description	catch L 172mm mounting distance 133mm non lockable chrome-plated 6200 total length 248mm		
accessories for	690536		
	GEV No.	690123	Ref. No. —
	door catch H 69mm D 37mm W 20mm mounting distance 43mm with roller		



1


GEV No.	690146	Ref. No.	C2211-01
description	handle latch L 172mm mounting distance 134mm non lockable heated units 6200 H 65mm type DUPLO total length 248mm		
accessories for	690146		
	GEV No.	690123	Ref. No. —
	door catch H 69mm D 37mm W 20mm mounting distance 43mm with roller		
	GEV No.	693777	Ref. No. —
	gasket H 6.6mm L 105mm W 45mm L1 78mm W1 25mm for handle		
	GEV No.	693778	Ref. No. —
	door catch		

MODULAR



1

GEV No.	690146	Ref. No.	C2211-01
description	handle latch L 172mm mounting distance 134mm non lockable heated units 6200 H 65mm type DUPLO total length 248mm		
accessories for	690146		
	GEV No.	690123	Ref. No. —
	door catch H 69mm D 37mm W 20mm mounting distance 43mm with roller		
	GEV No.	693777	Ref. No. —
	gasket H 6.6mm L 105mm W 45mm L1 78mm W1 25mm for handle		
	GEV No.	693778	Ref. No. —
	door catch		

RAHRBACH
6188 ERGO series



GEV No.	700081	Ref. No.	C8050-00
description	handle latch L 185mm mounting distance 150mm chrome-plated non lockable refrigeration units 6188		
accessories for	700081		
	GEV No.	690110	Ref. No. —
	base plate H 1mm L 38mm W 11mm mounting distance 26mm plastic		
	GEV No.	690111	Ref. No. —
	base plate H 2mm L 38mm W 11mm mounting distance 26mm plastic		
	GEV No.	690114	Ref. No. —
	base plate H 3.5mm L 185mm W 30mm mounting distance 150mm with inclination thread M5		
	GEV No.	700082	Ref. No. —
	door catch L 38mm W 18mm mounting distance 26mm		

door catches



GEV No.	690487	Ref. No.	C2211-02
description	door catch H 41mm L 70mm W 21mm mounting distance 40mm nickel-plated brass with roller rollerø 8mm		




GEV No.	700061	Ref. No.	C2210-02
description	door catch L 58mm W 20mm H 35mm mounting distance 42mm chrome-plated brass for headed units		
accessories for	700061		
	GEV No.	690414	Ref. No. —
	handle latch L 150mm mounting distance 133mm non lockable refrigeration units G 791		

hinges
oven hinges


GEV No.	700003	Ref. No.	531007200
description	opposite support L 110mm W 12mm mounting distance 94mm		




GEV No.	700001	Ref. No.	531022900
description	opposite support L 118mm W 17mm mounting distance 94mm		
For models:	CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-78ET, CF4-78ETX, CF4-78G, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98ET, CF4-98ETX, CF4-98G, CF4-98GE, CF6-712ET, CF6-712ETV, CF6-712ETVX, CF6-712ETX, CF6-712G, CF6-712GEV, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912ET, CF6-912ETV, CF6-912ETVX, CF6-912G, CF6-912GE, CF6-912GEV, CF6-912GV, CF-712GE, CF-712GPE, CF8-916ET, CF8-916ETV, CF8-916G, CF8-916GE, CF8-916GEV, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV...(Other models you can see in the webshop)		

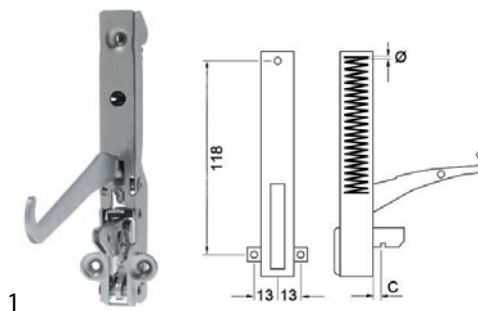

GEV No.	690030	Ref. No.	531007100
description	oven hinge mounting distance 118mm lug mounting 13mm lever length 117mm groove distance 10mm spring thickness 3.5mm mounting ear position left/right spring length 60mm L 155mm W 21mm		
For models:	CF-62EM, CF-62EM-A, CF-62ET, CF-62ET-A, CF-62GEM, CF-62GEM-A, CFC-62EM, CFC-62ET		
accessories for	690030		
	GEV No.	700003	Ref. No. 531007200
	opposite support L 110mm W 12mm mounting distance 94mm		


1

GEV No.	701573	Ref. No.	531059700
description	oven hinge mounting distance 142mm mounting distance 2mm lug mountingmm lever lengthmm groove distance 12mm spring thickness 3.3mm mounting ear position spring length 116mm L 170mm mounting pos. left/right W 22mm		
For models:	CF4-68ET, CF4-68ETX, CF4-68G, CF4-68GEM, CF6-610ET, CF6-610ETX, CF6-610G, CF6-610GEM, CFM2-68GEM, CFM3-612GEMV, CFM4-68ET, CFM4-68GEM, CFM6-610ET, CFM6-610GEM, MFM-610EM, TPF4-610G, TPF4-610GEM, TPFM4-610GEM		
accessories for	701573		
	GEV No.	701631	Ref. No. —
opposite support mounting distance 119mm L 135mm W 12mm			


 			
GEV No.	700390	Ref. No.	531007302
description	oven hinge mounting distance 142mm mounting distance 2mm lug mountingmm lever lengthmm groove distance 12mm spring thickness 3mm mounting ear position spring length 116mm L 170mm mounting pos. left/right W 22mm		
For models:	CF-10EM, CF-10EM-6, CF-10EM-A, CF-10ET, CF-10ET-6, CF-10ET-A, CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF4-8ET, CF4-8ETS, CF4-8G, CF4-8GEM, CF4-GEMS, CF-8EM, CF-8EM-A, CF-8ET, CF-8ET-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFC4-8ET, CFM-10EM, CFM-10EM-6, CFM-10EM-A, CFM-10ET, CFM-10ET-6, CFM-10ET-A, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM4-66ET, CFM4-66GEM, CFM-8EM, CFM-8EM-A, CFM-8ET, CFM-8ET-A, CFM-8GEM, CFM-8GEM-A, CFMC4-66ET, MFM-68EM		

1

GEV No.	700006	Ref. No.	531022800
description	oven hinge mounting distance 173mm mounting distance 2 105mm lug mounting 14mm lever length 120mm groove distance 11mm spring thickness 3.5mm mounting ear position left spring length 112mm W 25mm		
For models:	CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-78ET, CF4-78ETX, CF4-78G, CF4-78GE, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98ET, CF4-98ETX, CF4-98G, CF4-98GE, CF6-712ET, CF6-712ETV, CF6-712ET-VX, CF6-712ETX, CF6-712G, CF6-712GEV, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912ET, CF6-912ETV, CF6-912ETVX, CF6-912G, CF6-912GE, CF6-912GEV, CF6-912GV, CF-712GE, CF-712GPE, CF8-916ET, CF8-916ETV, CF8-916G, CF8-916GE, CF8-916GEV, CF8-916GV, CFA4-78G, CFA4-98G, CFA6-712GV...(Other models you can see in the webshop)		
accessories for	700006		
	GEV No.	700001	Ref. No. 531022900
opposite support L 118mm W 17mm mounting distance 94mm			
	GEV No.	700007	Ref. No. 531022700
oven hinge mounting distance 173mm mounting distance 2 105mm lug mounting 14mm lever length 120mm groove distance 11mm spring thickness 3.5mm mounting ear position right spring length 112mm W 25mm			

									
GEV No.		700007		Ref. No.		531022700			
description		oven hinge mounting distance 173mm mounting distance 2 105mm lug mounting 14mm lever length 120mm groove distance 11mm spring thickness 3.5mm mounting ear position right spring length 112mm W 25mm							
For models:		CF2-58G, CF2-58GE, CF2-68G, CF2-68GEM, CF3-512GEV, CF3-512GV, CF3-612GEMV, CF3-612GV, CF4-78ET, CF4-78ETX, CF4-78G, CF4-78GE, CF4-78GP, CF4-78GP-AUS, CF4-78GPE, CF4-78GP-USA, CF4-98ET, CF4-98ETX, CF4-98G, CF4-98GE, CF6-712ET, CF6-712ETV, CF6-712ET- VX, CF6-712ETX, CF6-712G, CF6-712GEV, CF6-712GP, CF6-712GPE, CF6-712GPEV, CF6-712GPV, CF6-712GPV-USA, CF6-712GV, CF6-912ET, CF6-912ETV, CF6-912ETVX, CF6-912G, CF6-912GE, CF6-912GEV, CF6- 912GV, CF-712GE, CF-712GPE, CF8-916ET, CF8-916ETV, CF8-916G, CF8-916GE, CF8-916GEV, CF8-916GV, CFA4-78G, CFA4-98G, CFA6- 712GV...(Other models you can see in the webshop)							
accessories for		700007							
		GEV No.		700001		Ref. No.		531022900	
		opposite support L 118mm W 17mm mounting distance 94mm							
		GEV No.		700006		Ref. No.		531022800	
		oven hinge mounting distance 173mm mounting distance 2 105mm lug mounting 14mm lever length 120mm groove distance 11mm spring thickness 3.5mm mounting ear position left spring length 112mm W 25mm							

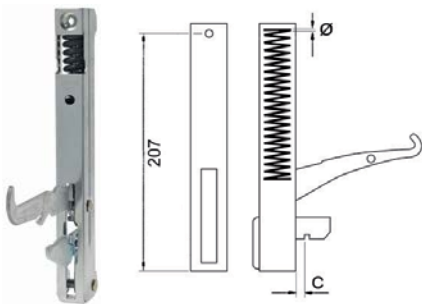

			
1			
GEV No.	690037	Ref. No.	531008200
description	oven hinge mounting distance 205mm mounting distance 2mm lug mountingmm lever length 119mm groove distance 13mm spring thickness 4.3mm mounting ear position spring length 103mm L 214mm		
For models:	CF-10EM, CF-10EM-6, CF-10EM-A, CF-10ET, CF-10ET-6, CF-10ET-A, CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF4-8ET, CF4-8ETS, CF4-8G, CF4-8GEM, CF4-8GMS, CF-8EM, CF-8EM-A, CF-8ET, CF-8ET-A, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFC4-8ET, CFM-10EM, CFM-10EM-6, CFM-10EM-A, CFM-10ET, CFM-10ET-6, CFM-10ET-A, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8EM, CFM-8EM-A, CFM-8ET, CFM-8ET-A, CFM-8GEM, CFM-8GEM-A		

door bearing

			
1			
GEV No.	519631	Ref. No.	C9021-00
description	hinge bearing L 112mm W 35mm H 6mm mounting pos. upper without bolt		

			
1			
GEV No.	519633	Ref. No.	C9022-00
description	hinge bearing L 151mm W 35mm mounting pos. lower thickness 6mm without bolt		

			
1			
GEV No.	519635	Ref. No.	C8311-00
description	hinge bearing L 60mm W 36mm H 22mm thickness 3mm bolt 12mm		

accessories

bushes

			
1			
GEV No.	696844	Ref. No.	C1043-00
description	bush for pivot bearing combi-steamer ID ø 10mm ED ø 14mm L 18mm		

fittings for catering equipment

outlet taps

producer-specific

LOTUS

			
1			
GEV No.	691355	Ref. No.	533009600
description	lever L 64mm for outlet tap thread M6 ET - M6 ET		
For models:	BM-61EM, BM-61GF, BM-62EM, BM-62ET, BM-62GF, BMT-63EM, BMT-64EM, BMT-64G, BMT-66EM, BMT-66G, BMT-74EM, BMT-74G, BMT-78EM, BMT-78G, BMT-94EM, BMT-94G, BMT-98EM, BMT-98G, CFA4-78G, CFA6-712GV, CP-61EM, CP-62ET, CP-62G, CPT-64EM-USA, CPT-64ET, CPT-64G, CPT-66ET, CPT-66G, CPT-74ET, CPT-74G, CPT-76ET, CPT-76G, CWK-74ET, CWK-78ET, CWK-94ET, CWK-98ET, CWKT-64ET, CWKT-68ET, CWKT-74ET, CWKT-78ET, CWKT-94ET, CWKT-98ET, F10T-63EM, F10T-63ET, F10T-63ETX, F13T-74E, F13T-74ET, F13T-74ETX, F13T-74G, F13T-94ET...(Other models you can see in the webshop)		

			
1			
GEV No.	106598	Ref. No.	533010200
description	olive for pipe ø 18mm Qty 1 pcs ED ø 21mm		
For models:	BM-10EM, BM-10EMX, BM-4EM, BM-4EMX, BM-4G, BM-61EM, BM-61GF, BM-62EM, BM-62ET, BM-62GF, BM-6EM, BM-6EMX, BM-6G, BM-8EM, BM-8EMX, BM-8G, BMT-63EM, BMT-64EM, BMT-64G, BMT-66EM, BMT-66G, BMT-74EM, BMT-74G, BMT-78EM, BMT-78G, BMT-94EM, BMT-94G, BMT-98EM, BMT-98G, BS-4EM, BS-4EMX, CP-61EM, CP-62ET, CP-62G, CP-6G, CPT-64EM-USA, CPT-64ET, CPT-64G, CPT-66ET, CPT-66G, CPT-74ET, CPT-74G, CPT-76ET, CPT-76G, CWK-74ET, CWK-78ET, CWK-94ET, CWK-98ET, CWKT-64ET, CWKT-68ET...(Other models you can see in the webshop)		


			
1			
GEV No.	106597	Ref. No.	533010100
description	union screw thread 3/4" for pipe ø 18mm L 20mm Qty 1 pcs WS 27		
For models:	BM-10EM, BM-10EMX, BM-4EM, BM-4EMX, BM-4G, BM-61EM, BM-61GF, BM-62EM, BM-62ET, BM-62GF, BM-6EM, BM-6EMX, BM-6G, BM-8EM, BM-8EMX, BM-8G, BMT-63EM, BMT-64EM, BMT-64G, BMT-66EM, BMT-66G, BMT-74EM, BMT-74G, BMT-78EM, BMT-78G, BMT-94EM, BMT-94G, BMT-98EM, BMT-98G, BS-4EM, BS-4EMX, CP-61EM, CP-62ET, CP-62G, CP-6G, CPT-64EM-USA, CPT-64ET, CPT-64G, CPT-66ET, CPT-66G, CPT-74ET, CPT-74G, CPT-76ET, CPT-76G, CWK-74ET, CWK-78ET, CWK-94ET, CWK-98ET, CWKT-64ET, CWKT-68ET...(Other models you can see in the webshop)		




gaskets

gaskets for heated units


door seals




GEV No.	901129	Ref. No.	C2215-02
description	door seal profile 2402 W 580mm L 765mm Qty 1 4-piece		




GEV No.	900413	Ref. No.	C6090-00
description	door seal profile 2458 L 1400mm Qty 1		



GEV No.	901384	Ref. No.	C9031-00
description	door seal profile 2470 L 2100mm Qty 1		



GEV No.	900417	Ref. No.	C5220-00
description	door seal profile 2470 L 2300mm Qty 1		



GEV No.	902544	Ref. No.	C9029-00
description	door seal profile 2470 L 2570mm		

door seals with fixing hook




GEV No.	902401	Ref. No.	75R0003
description	door seal L 470mm W 380mm 4-sided with 8 mounting clips		

O-rings

EPDM

ø2.00mm



GEV No.	100809	Ref. No.	536000500
description	O-ring EPDM thickness 2mm ID ø 21mm Qty 1 pcs		
For models:	BM-61GF, BM-62GF, CP-62G, CPM-62G, FG-10, FG-2-10, FMG-10, FMG-15, FMG-2-10, FMG-2-15, FMPG-20, FMPG-30, FP-62G, FPG-20, FPG-30, FQ-61GF, FQ-62GF, FQM-4G, FTL-61G, FTL-61GS, FTL-62G, FTL-62GS, FTL-63G, FTL-63GS, FTL-64G, FTL-64GS, FTLR-62G, FTLR-62GS, FTLR-63G, FTLR-63GS, FTLR-64G, FTLR-64GS, FTR-61G, FTR-61GS, FTR-62G, FTR-62GS, K-10, K-10S, K-12, K-12S, K-14, K-14S, K-15, K-15S, K-16, K-16S, K-18, K-18S, K-20, K-20S...(Other models you can see in the webshop)		

ø5.34mm



GEV No.	510408	Ref. No.	10500100
description	O-ring EPDM thickness 5.34mm ID ø 47mm Qty 1 pcs		



special gaskets

for combi-steamers



1

GEV No.	696847	Ref. No.	C9153-00
description	gasket for motor shaft conical ED ø 21.5mm ID ø 11.8mm plastic		

sealing discs



1

GEV No.	901539	Ref. No.	C9032-00
description	gasket ø 16mm thickness 2.7mm rubber Qty 1 pcs		

dosing pumps

membrane dosing pumps

self-priming

LANG

accessories



1

GEV No.	101286	Ref. No.	533039100
description	olive ID ø 6mm Qty 1 pcs		
accessories for	101286		



GEV No.	100909	Ref. No.	533018500 / VPE1 533039000
union screw thread M10x1 for pipe ø 6mm Qty 1 pcs			



GEV No.	101464	Ref. No.	—
union nut thread M12x1 for pipe ø 6mm			

fittings, hose and pipe connectors

fittings

T-pieces

nickel-plated brass



1

GEV No.	520812	Ref. No.	HR-040
description	T-piece thread 1/8" ET - 1/8" IT - 1/8" IT nickel-plated brass L 37mm		

hose connectors

producer-specific



1

GEV No.	520337	Ref. No.	HR-595
description	hose connector thread 1/4" grommet ø 7mm ID ø 4.5mm grommet length 19mm WS 14 total length 35mm thread L 10mm		

measuring equipment

thermometers

built-in thermometers

ø60mm



1

GEV No.	379855	Ref. No.	C2186-00
description	thermometer mounting ø 60mm t.max. 350°C +50 up to +350°C probe ø 6mm probe L 20mm capillary pipe 1030mm		



fastening material

nuts

hexagonal nuts

hexagonal nuts metric (without norm)



1

GEV No.	102067	Ref. No.	533009800
description	nut thread M8x1 H 3mm brass Qty 1 pcs type SEF 1		
For models:	CF-10G6-A, CF-10G-6F, CF-10G-A, CF-10GEM, CF-10GEM-6, CF-10GEM6-A, CF-10GEM-A, CF-10GF, CF4-78G, CF4-78GE, CF4-8G, CF4-8GEM, CF4-GEMS, CF-62GEM, CF-62GEM-A, CF6-712G, CF6-712GEV, CF6-712GV, CF-712GE, CF-8G-A, CF-8GEM, CF-8GEM-A, CF-8GF, CFM-10GEM, CFM-10GEM-6, CFM-10GEM6-A, CFM-10GEM-A, CFM-8GEM, CFM-8GEM-A, F-1G, FB-1G, FO-1G, FO-2G, FO-3G, FOS-1G, FOS-2G, FOS-3G, PC-12G, PC-4G, PC-61GF, PC-62GF, PC-712G, PC-716G, PC-74G, PC-78G, PC-8G, TP2-712G, TPF2-712G, TPF2-712GV		

miscellaneous



1

GEV No.	696838	Ref. No.	C8305-00
description	nut thread M10x1 WS 14 brass Qty 1 pcs serrated for door hinge		

consumables

fuses

fine fuses



1

GEV No.	358532	Ref. No.	LC-422
description	fine fuse size ø5x20mm 2A fast-acting rated 250V Qty 10 pcs		



1

GEV No.	358594	Ref. No.	LC-426
description	fine fuse size ø5x20mm 0.16A slow-acting rated 250V Qty 10 pcs		

A

alarm devices 12

C

cam switches 6
 consumables 36
 contactors 12
 control thermostats 3

D

door catches 31
 door seals 34
 door seals with fixing hook 34
 dosing pumps 35

E

edgemount latches 29
 electric accessories 16
 electric timers 11
 energy regulators 2

F

fans 14
 fastening material 36
 fine fuses 36
 fittings 35
 fuses 15, 36

G

gas control valves 16
 gas nozzles 24
 gaskets for heated units 34
 GEV 2

H

halogen lamp 9
 handle latches 29
 heating elements 2
 heating elements for convection 2
 hexagonal nuts 36
 hose connectors 35
 hot air fans 15
 hot air motors 14

I

ignition cables 21
 ignition units 21
 indicator lights 8
 indicator lights (complete) 8

L

lamps 8

light bulbs 9

M

magnetic switches 7
 measuring equipment 35
 mechanical timers 11
 microswitches 5

N

nuts 36

O

O-rings 34
 oven hinges 31
 oven lamps 9

P

pilot burners 17
 probes 12
 push/momentary push switches 5

R

relays 12
 rocker/momentary rocker switches 5

S

safety thermostats 4
 sealing discs 35
 solenoid valves 13
 switches and momentary switches 5

T

terminals 16
 thermocouples 22
 thermostats 3
 timers 11